



# Traffic Calming Guidelines



# Traffic Calming Guidelines

<b>Introduction</b> .....	<b>1</b>
<b>Types of Traffic Calming</b> .....	<b>1</b>
<b>Type I (Minor-adjustment) Measures</b> .....	<b>1</b>
<b>Type II (Engineered-based) Measures</b> .....	<b>2</b>
Horizontal Deflections .....	2
Vertical Deflections.....	2
Intersection Treatments.....	2
Other Cross-sectional Treatments .....	2
Specialized Implementations.....	3
<b>Community-based Initiatives</b> .....	<b>3</b>
<b>Design Considerations</b> .....	<b>3</b>
<b>Canadian Guide to Traffic Calming</b> .....	<b>3</b>
<b>Ontario Traffic Manuals (OTMs)</b> .....	<b>4</b>
<b>Traffic Calming Toolkit</b> .....	<b>4</b>
<b>Type I (Minor-adjustment) Measures</b> .....	<b>6</b>
Vertical Centreline Treatment.....	6
Converging Chevrons.....	8
Dragon’s Teeth.....	10
Full-Lane Transverse Bars .....	11
Peripheral Transverse Bars.....	12
On-Road Sign Pavement Markings .....	13
Speed Display Devices .....	14
Mobile Changeable Message Signs.....	16
<b>Type II (Engineered-based) Measures: Horizontal Deflections</b> .....	<b>17</b>
Curb Extension.....	17
Raised Median Island.....	20
Lateral Shift .....	22
<b>Type II (Engineered-based) Measures: Vertical Deflections</b> .....	<b>24</b>
Speed Hump/Table .....	24
Speed Cushions .....	26

## Traffic Calming Guidelines

<b>Type II (Engineered-based) Measures: Intersection Treatments.....</b>	<b>28</b>
Textured Crosswalk.....	28
Raised Crosswalks.....	30
Intersection Treatments – Raised Intersection.....	32
Intersection Treatments – Curb Radius Reduction.....	34
Intersection Treatments – Right-In/Right-Out Islands, Intersection Channelization, and Raised Medians through Intersections.....	36
Intersection Treatments – Vehicular Directional Closures and Diverters .....	40
<b>Type II (Engineered-based) Measures: Other Cross-sectional Treatments.....</b>	<b>43</b>
Lane Narrowing.....	43
On-Street Parking.....	45
<b>Type II (Engineered-based) Measures: Specialized Implementations.....</b>	<b>47</b>
Chicanes.....	47
Speed Kidneys.....	50
Mini-Roundabouts .....	52
Lane Reductions .....	55
Textured Pavement.....	57
<b>Community-based Initiatives .....</b>	<b>59</b>
Lawn Signs Encouraging Slower Driving.....	59
Pace Car Program.....	60
Local-traffic Implementations .....	61
Park & Stride Program .....	62

# Traffic Calming Guidelines

## Introduction

This document is intended to provide guidance specific to traffic calming measures that may be considered for future implementation in Kingston. These tools are classified as Type I (minor-adjustment), Type II (engineered-based), and community-based, depending on the intended usage of the treatment. The following details are included for each measure:

- Description
- Applicability (based on road type, surrounding environment, ADT, roadway cross-section, etc.)
- Potential benefits (speed and volume reduction)
- Geometric design considerations
- Signing and pavement marking design
- Other considerations (effect on local vehicle access, emergency services, active transportation, etc.)
- Estimated cost (low, medium, or high)


These guidelines should not be interpreted as comprehensive design guidelines. The use of a particular measure is dependent on the scope and goals of the traffic calming projects and constraints of the built environment. Each traffic calming implementation should comply with all relevant City of Kingston design and construction standards and specifications. The traffic calming measures considered as part of these guidelines are based on current best practices and applicable standards including the Transportation Association of Canada (TAC) Canadian Guide to Traffic Calming Second Edition and customized for Kingston's needs.

## Types of Traffic Calming

### Type I (Minor-adjustment) Measures

Type I (minor-adjustment) measures are effective, low-cost traffic calming tools that can be more quickly and easily installed relative to permanent treatments and can be more easily modified where applicable. While often temporary or seasonal in nature, these tools are an important first step to reduce vehicular speeds and can increase safety for all road users. The Type I measures considered as part of these guidelines include the following:

- Vertical centreline treatments
- Pavement markings
- On-road pavement messaging
- Speed display devices
- Mobile changeable message signs

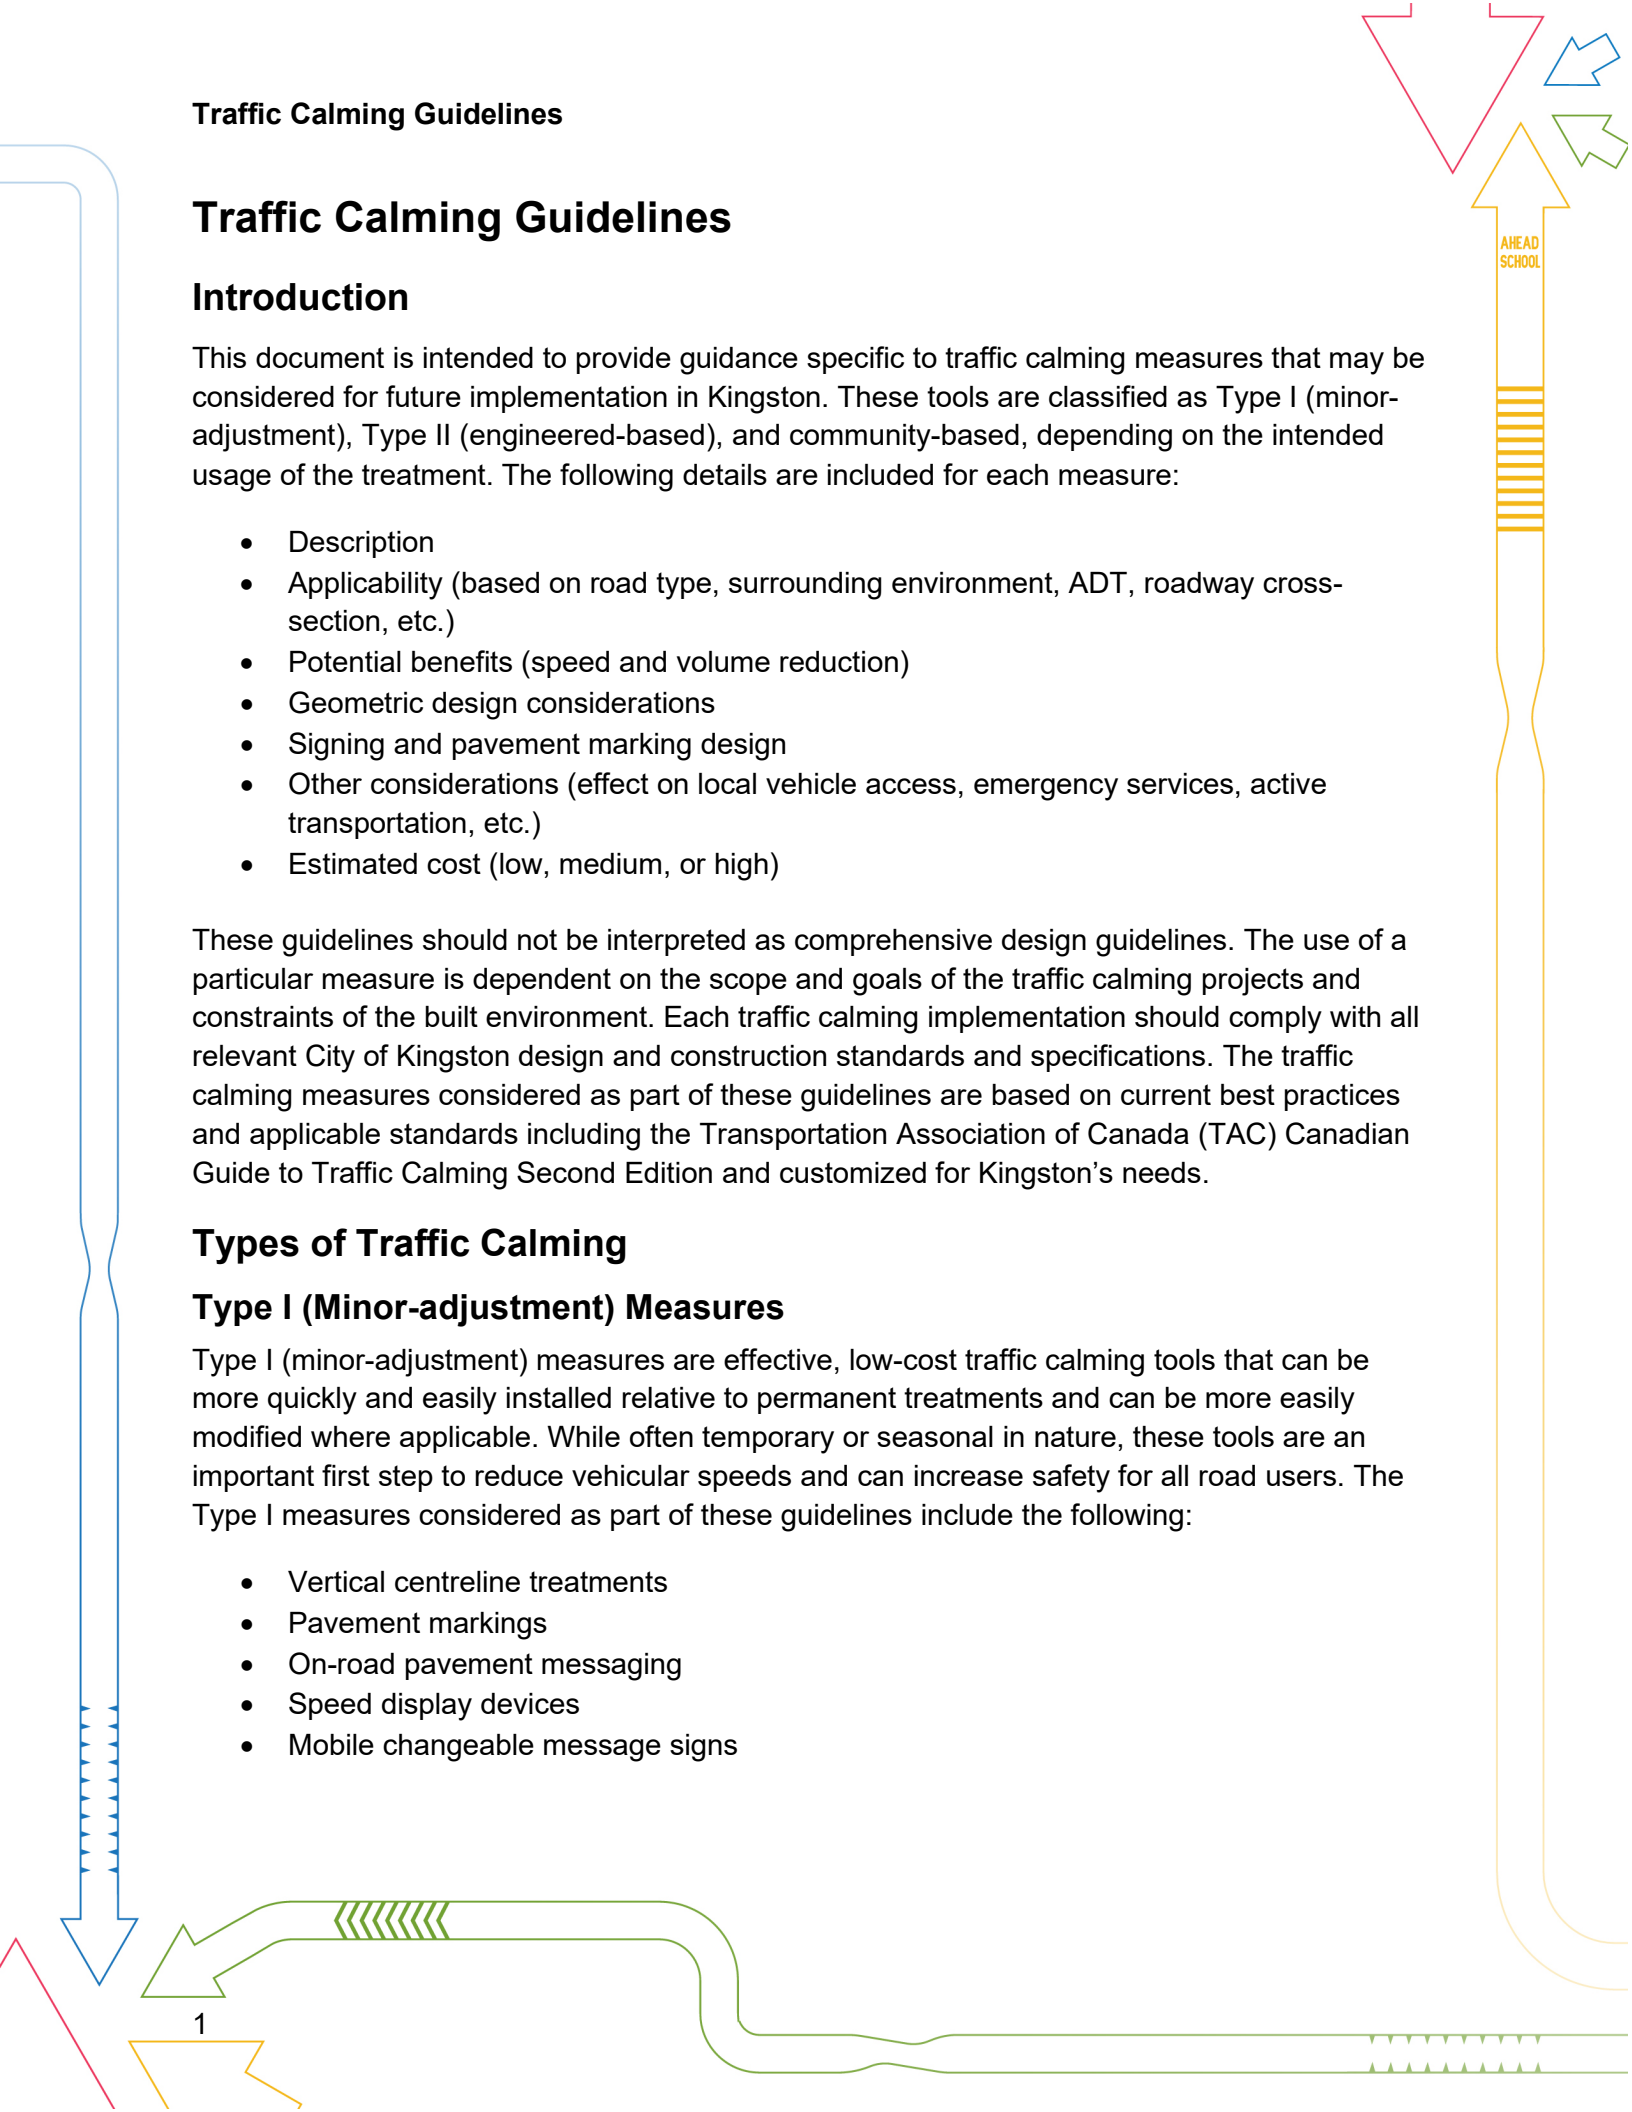

## Traffic Calming Guidelines

### Type II (Engineered-based) Measures

Type II measures are physical changes that are more permanent in nature and typically involve more resources and longer timelines to plan, design and construct. Type II measures include horizontal deflections, vertical deflections, intersection treatments, cross-sectional treatments, and specialized implementations.

#### Horizontal Deflections

TAC's Canadian Guide to Traffic Calming defines a Horizontal Deflection as a type of traffic calming measure that causes a lateral shift in the travel pattern of vehicles. This shift forces motorists to slow down to comfortably navigate the measure. The horizontal deflections considered as part of these guidelines include the following:

- Curb extensions
- Raised median islands
- Lateral shift

#### Vertical Deflections

TAC's Canadian Guide to Traffic Calming defines a Vertical Deflection as a type of traffic calming measures that causes a vertical upward movement of the vehicle. The change in the height of the roadway forces a motorist to slow down in order to maintain an acceptable level of comfort. The vertical deflections considered as part of these guidelines include the following:

- Speed humps / tables
- Speed cushions


#### Intersection Treatments

From a traffic calming perspective, Intersection Treatments can be defined as a type of traffic calming measure that may slow vehicular traffic through the intersection and improve safety for pedestrians. Intersection treatments considered as part of these guidelines include the following:

- Textured crosswalks
- Raised crosswalks
- Curb radius reductions
- Raised intersections
- Right-in/right-out islands, channelizations etc.
- Vehicular directional closures and diverters

#### Other Cross-sectional Treatments

This group of treatments are defined as a change to the existing roadway cross-section to fewer or narrower motor vehicle travel lanes, which increases the side friction to the traffic flow and

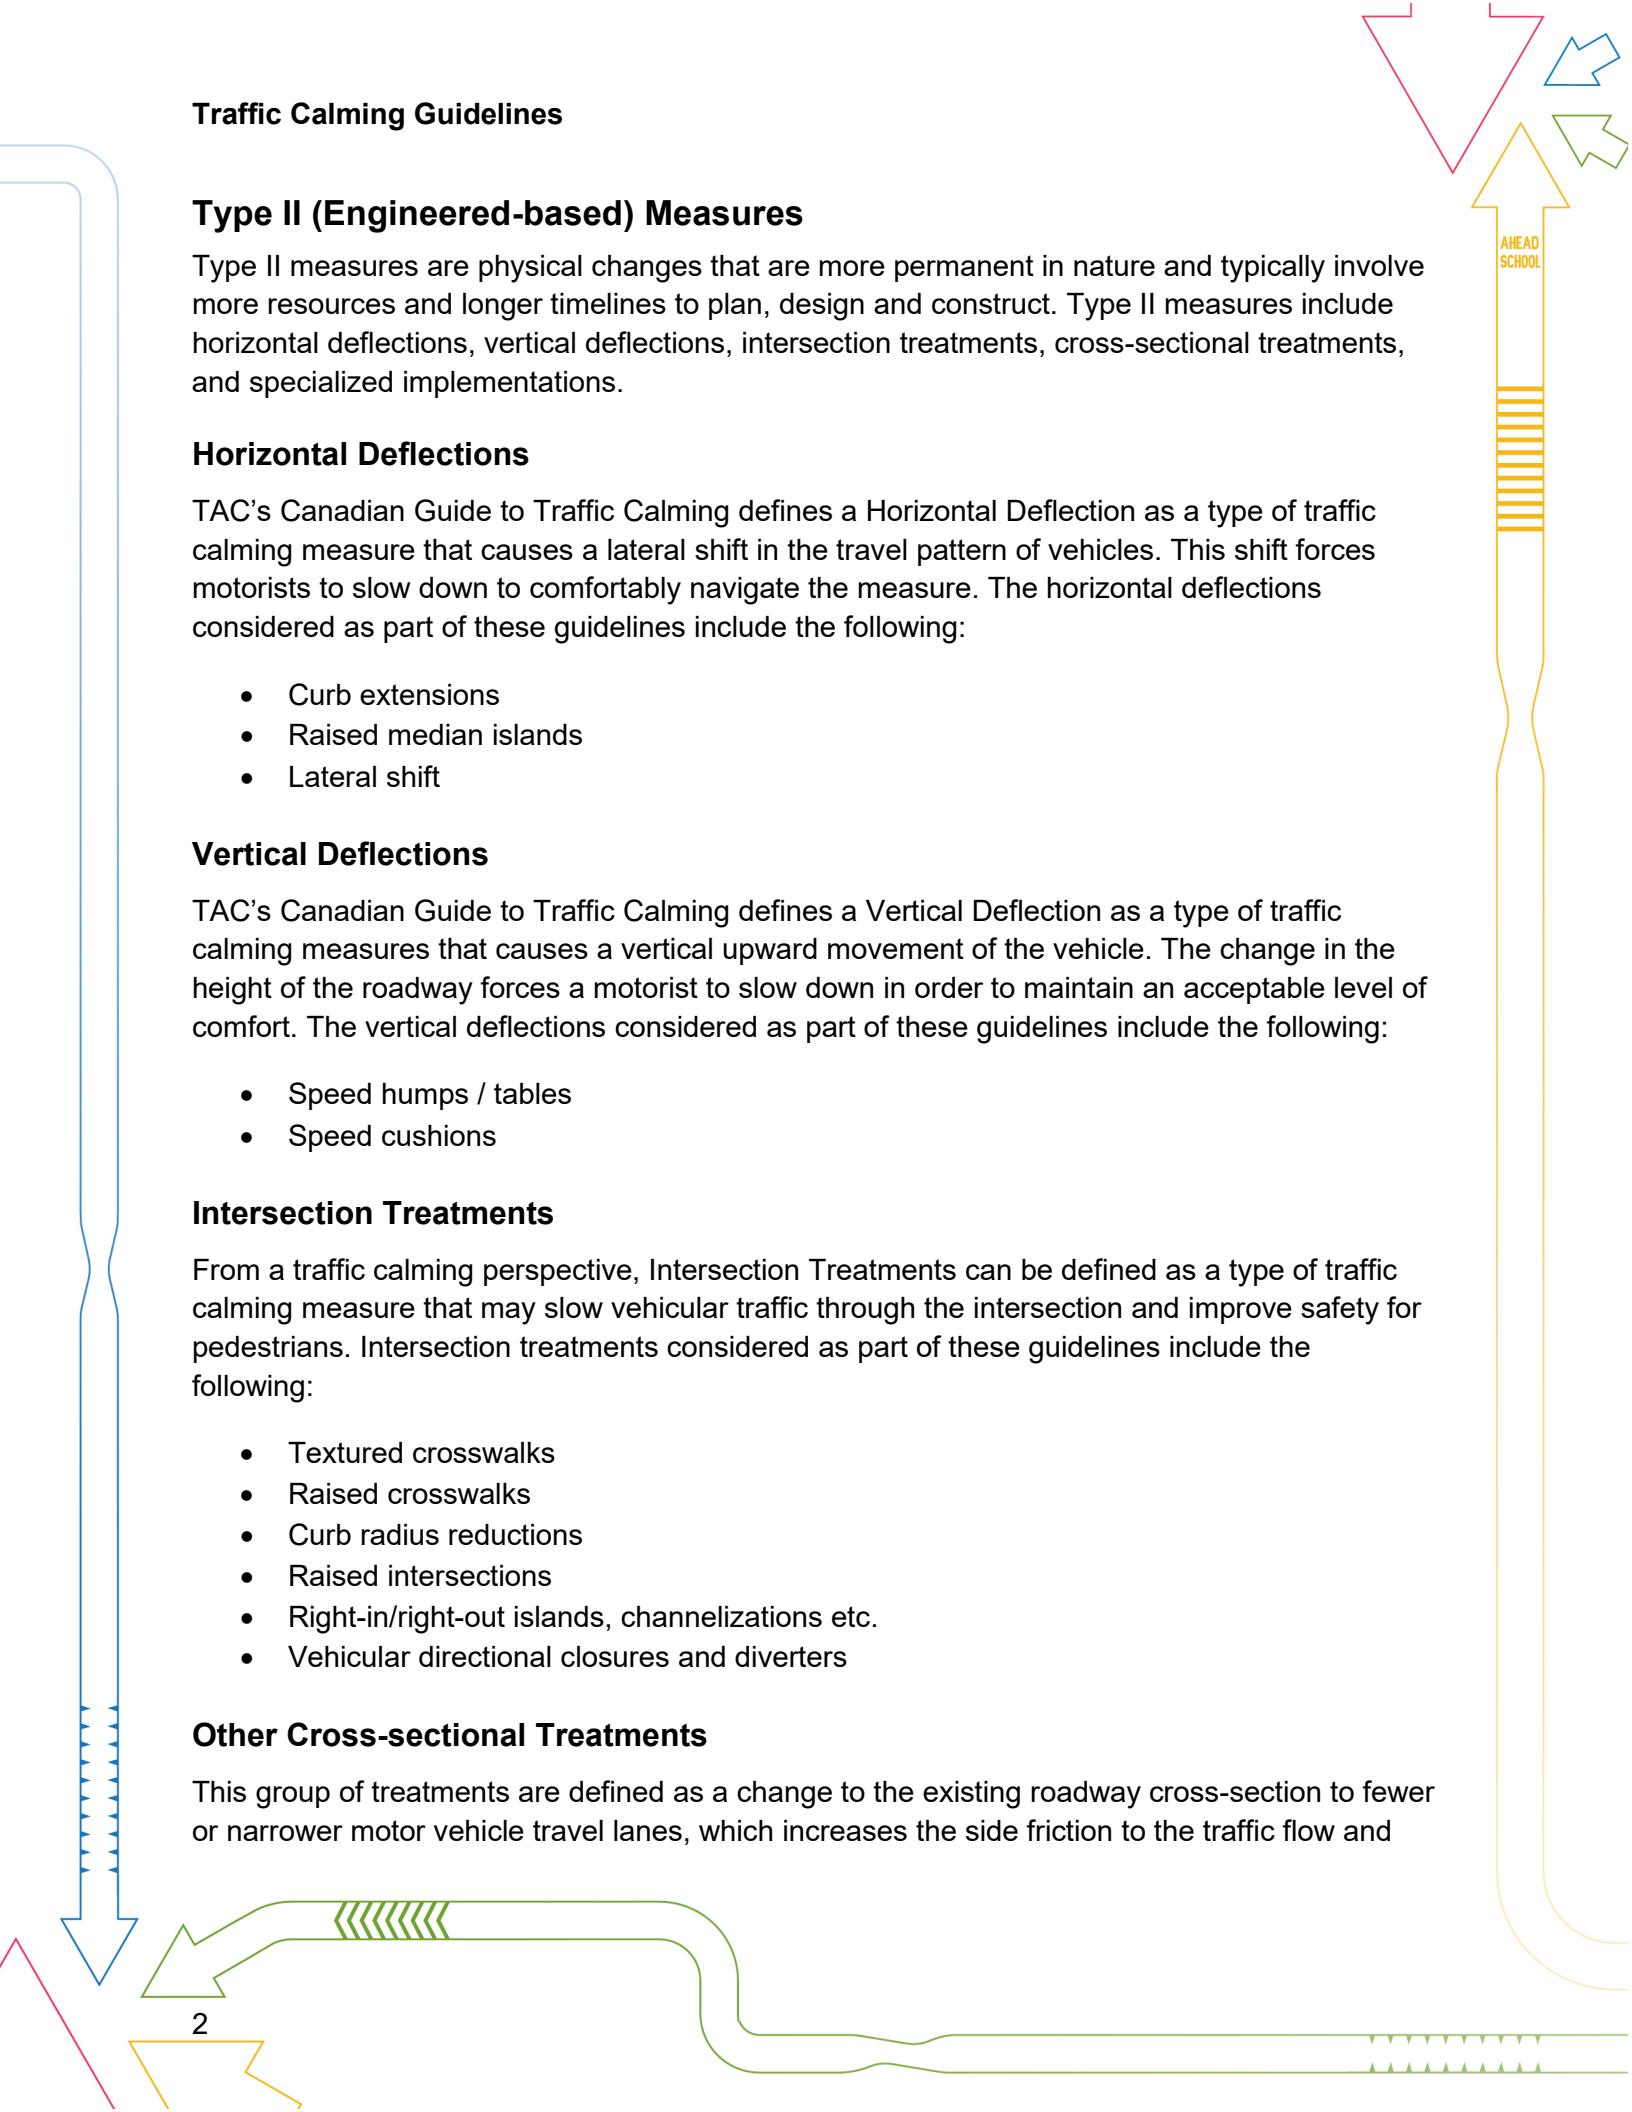

## Traffic Calming Guidelines

creates a potential reduction of vehicular speed. Cross-sectional treatments considered as part of these guidelines include the following:

- Lane narrowing
- On-street parking

## Specialized Implementations

Specialized implementations include traffic calming-related initiatives that fall outside of the scope of the existing process but could be considered in broader projects or initiatives. The effectiveness of these implementations is highly dependent on the scope of the project and built environment being considered. Specialized implementations considered as part of these guideline include the following:

- Chicanes
- Speed kidneys
- Mini-roundabouts
- Lane reductions
- Textured pavement

## Community-based Initiatives

Community-based initiatives involve tools and programs that residents could implement with support from the City. This approach reflects a desire by some residents, community groups, and other stakeholders to address concerns in an area where City-led interventions are not yet planned or committed. Community programs and initiatives considered as part of this guideline include the following:


- Lawn signs encouraging slower driving
- Pace car program
- Local-traffic Implementations
- Park & stride program

## Design Considerations

The design of all Traffic Calming Measures shall be subject to the guidelines of the Institute of Transportation Engineers (ITE), TAC Canadian Guide to Traffic Calming, Ontario Traffic Manuals, industry best practices and all relevant City design and construction standards and specifications. The following guidelines and associated sections are relevant to traffic calming design:

## Canadian Guide to Traffic Calming

- General considerations
- Raised Crosswalk
- Raised Intersection

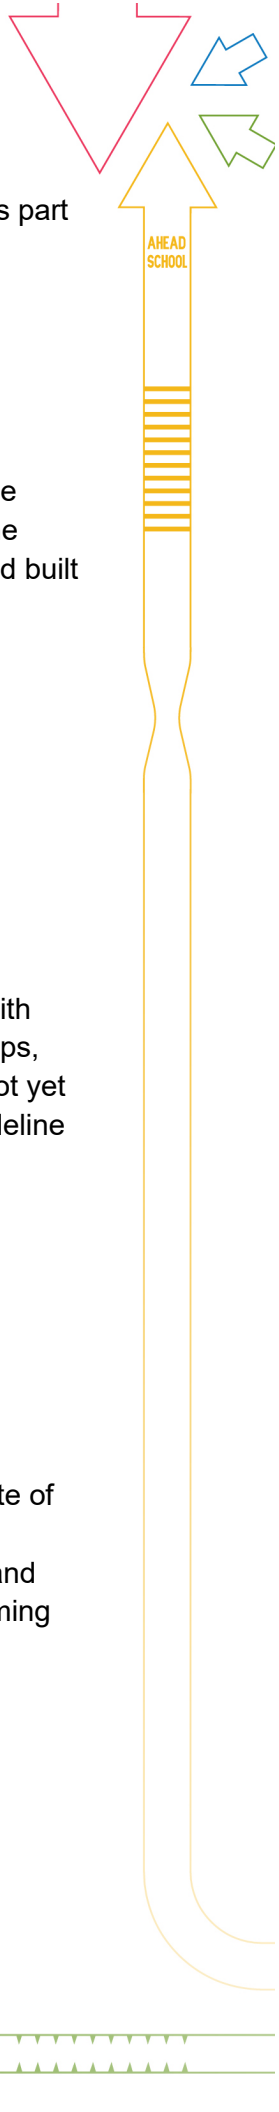

## Traffic Calming Guidelines

- Speed Cushion
- Speed Hump/Table
- Chicanes
- Curb Radius Reduction
- Speed Kidney
- Traffic Circle/Button/Mini-roundabout
- Curb extension/Neckdown/Choker
- On-street Parking
- Raised Median Island
- Road Diet
- Sidewalk Extension / Textured Crosswalk
- Peripheral Transverse Bars
- Several access restrictions measures

## Ontario Traffic Manuals (OTMs)

- Book 5
- Book 6
- Book 11
- Book 15
- Book 18


## Traffic Calming Toolkit

The following section provides details for each traffic calming measure considered. This includes a general description of each measure, applicability, design/implementation considerations and ranges of costs for initial installation or construction. The following should be noted generally as it relates to these traffic calming measures:

- The measures are generally applicable in block lengths greater than 110m in length
  - If a road segment is less than 110m in length between the start and end of the road or between stop controlled intersections, there is typically not sufficient distance for vehicles to gain speed – therefore, traffic calming measures would likely not be as effective in these instances.
- The toolkit presents ranges of costs for initial installation to aid in the selection of measures for specific streets or projects. For the purposes of these guidelines:
  - “Low” implementation costs are generally considered in the range of less than \$10,000 for an installation along a block segment.
  - “Medium” costs are generally considered in the range of \$10,000 - \$50,000 for an installation along a block segment.
  - “High” costs are generally considered above \$50,000 for an installation along a block segment.

## Traffic Calming Guidelines

- The implementation costs noted above do not include operating and life cycle considerations, which may also need to be considered in the selection of treatments. Line painting applications and bollard installations, as examples, generally have lower initial costs than changes to curbs or pavement, however these measures also require ongoing maintenance and/or reapplications. Equipment such as speed display devices may require repairs over their lifespan (i.e. battery replacement) and eventual replacement of the device itself. For Type II measures, consideration needs to be given to the life cycle of the existing infrastructure in the right-of-way, including changes which may positively or negatively impact the lifespan of these assets.

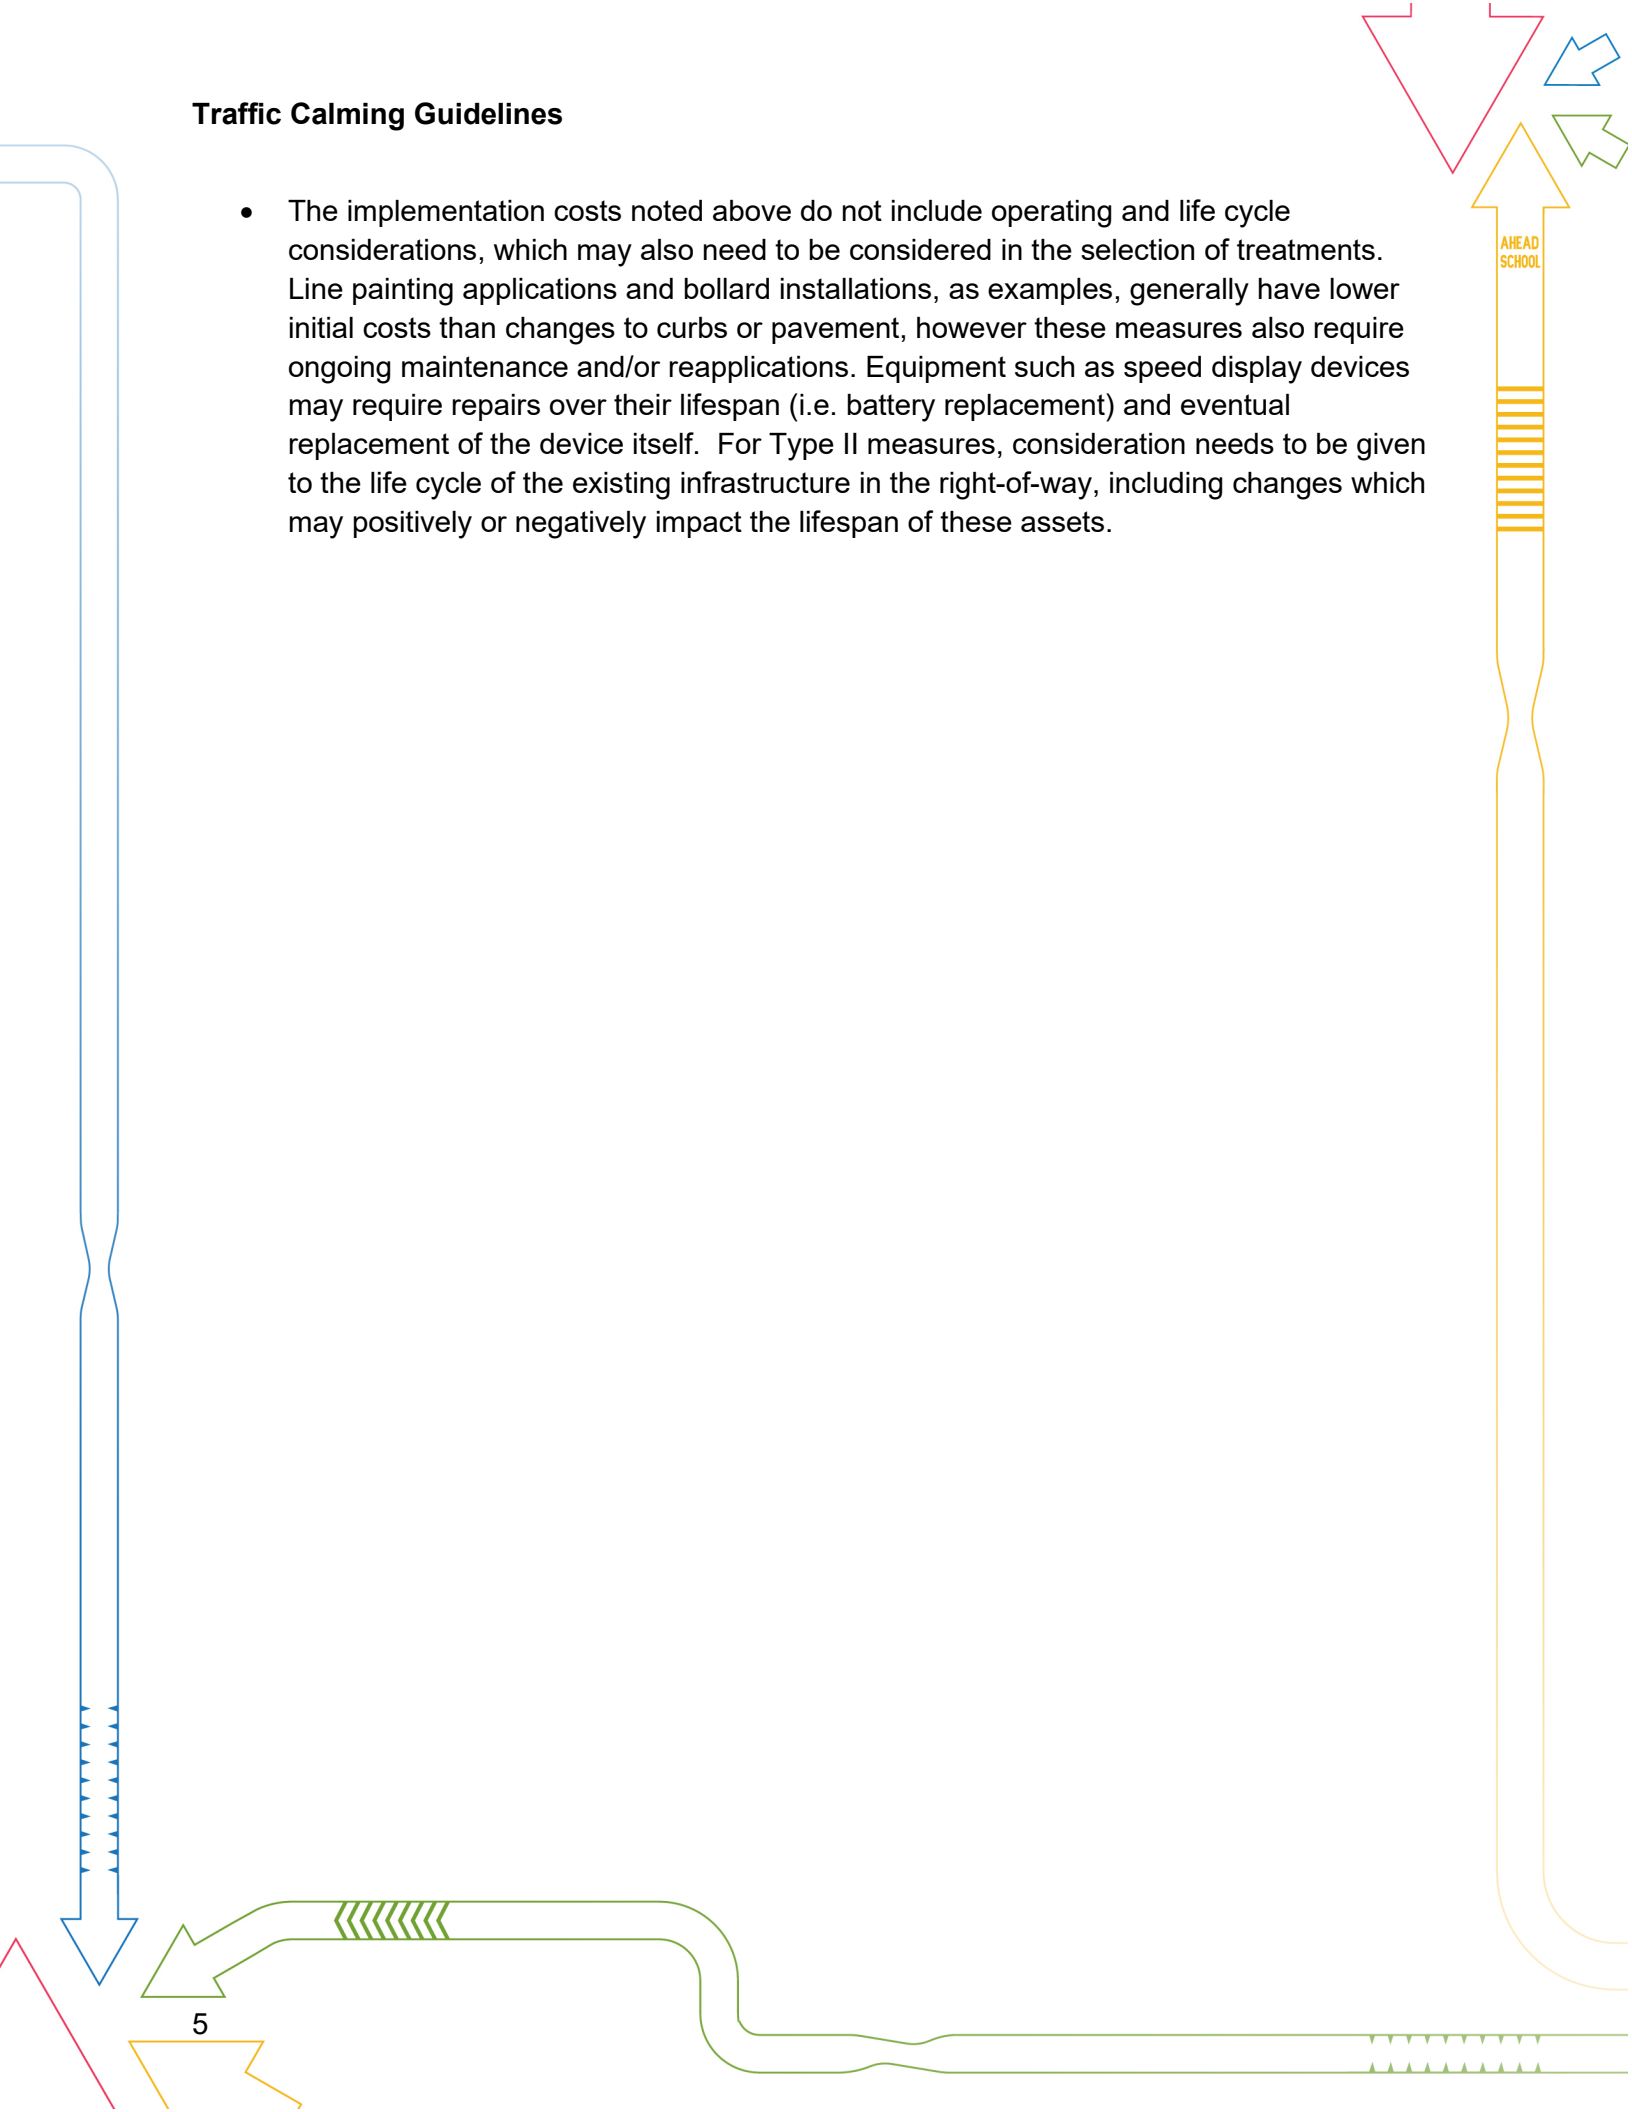



## Traffic Calming Guidelines

### Type I (Minor-adjustment) Measures

#### Vertical Centreline Treatment

##### Description

Vertical centerline treatments involve the use of vertical installations such as flexible post-mounted delineators or raised pavement markers to create a centre median. This gives drivers a perception of lane narrowing and creates a sense of constriction, which can lead to a reduction in operating speed.

##### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** Two-lane bidirectional roadways
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:** Where a delineator may block driveways or cross-streets



##### Potential Benefits

- **Speed Reduction:** Due to the narrowing effects of the device, speed reduction up to 5 km/h can be achieved.

##### Design Considerations<sup>1</sup>

Vertical centreline bollards may be paired with a side cycling bollard spaced 3.0 m to 3.6 m from the centreline bollard. A cycling bollard is only recommended if a minimum of 1.5 m can be maintained between the curb and bollard for cyclists to travel through.

##### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access, however placement of bollards should consider driveway/accesses and proximity to intersections.
- **Emergency Services:** Consideration required for larger vehicles along narrow roads or in which on-street parking is provided.

<sup>1</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. Canadian Guide to Traffic Calming, Second Edition. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

- **Active Transportation:** Due to the road narrowing, drivers must exert extra caution when passing a cyclist along the roadway. Side bollards should only be included when more than 1.5m of clear space is available between the bollard and curb.
- **Parking:** May require removal of on-street parking at the locations of the measures.
- **Maintenance:** Can create challenges for snow plowing and snow removal – typically these measures do not permit sufficient clearance for snowplows to navigate between the bollards and curb.
- **Implementation Cost:** Low



## Traffic Calming Guidelines

### Type I: Converging Chevrons

#### Description

Converging chevrons are pavement markings painted in the shape of a forward facing “V” pointing in the travel direction of the roadway. The spacing between the chevrons or width of the chevrons can be reduced as distance increases to create the illusion that a motorist’s speed is increasing. This is done to alert the driver of the need to reduce their speed.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** Two-lane roadways
- **Grade:** N/A
- **Locations to Avoid:** N/A



#### Potential Benefits

- **Speed Reduction:** Degree of speed reduction is dependent on the use of other traffic calming measures along the roadway (minimal demonstrated effect if used alone).

#### Design Considerations:<sup>2</sup>

The size of the converging chevrons varies depending on the width of the travel lane. However, the following equation can be used as a guideline to determine the spacing between each chevron:

$$L = v_1 * t_b + \frac{(v_1^2 - v_2^2)}{2a}$$

FIGURE 148. EQUATION. DECREASING VELOCITY LINEAR EQUATION

Where:

$L$  = distance between successive pair of transverse bar pairs  $pair_1$  and  $pair_2$  (ft)

$v_1$  = speed at pair 1 (ft/s) (speed at the first pair is the transition zone speed; speed at the last pair is the entrance posted speed limit)

$v_2$  = speed at pair 2

$t_b$  = perception reaction time (0.5 s)


$a$  = deceleration rate (ft/s<sup>2</sup>)

#### Other Considerations

<sup>2</sup> <https://www.fhwa.dot.gov/publications/research/safety/15030/009.cfm>

# Traffic Calming Guidelines

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Maintenance:** Due to the nature of the elements used to implement this treatment, its implementation will require recurring maintenance/reapplication.
- **Implementation Cost:** Low

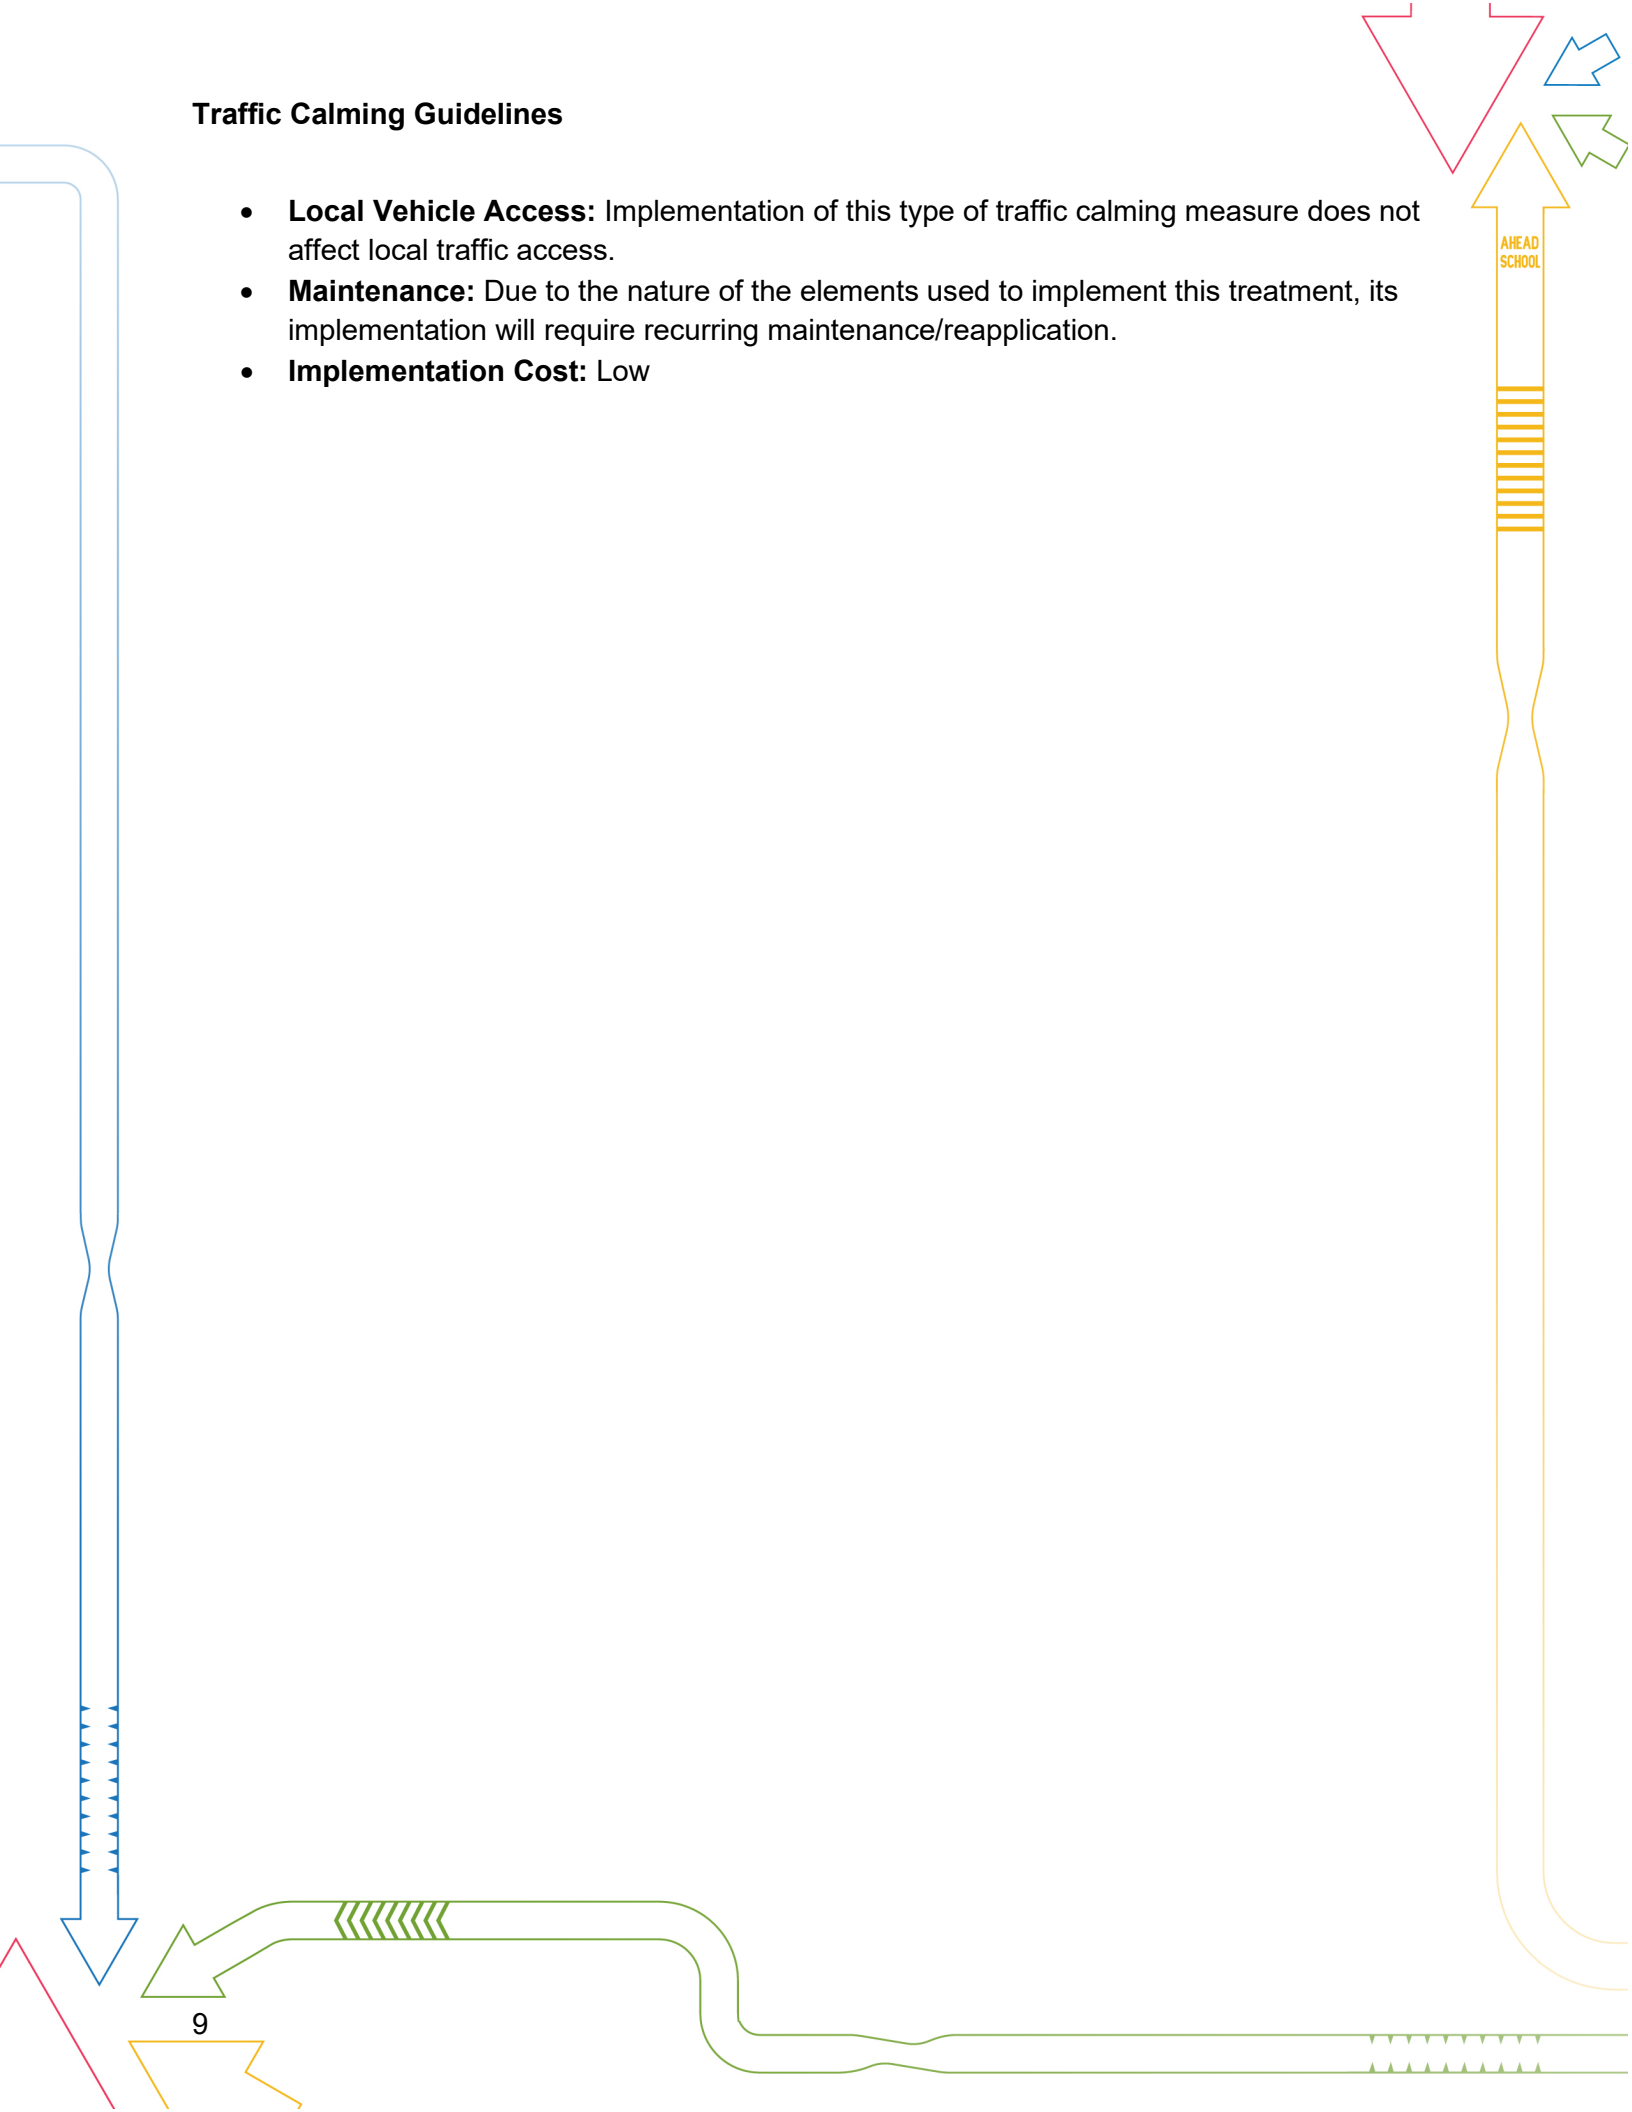

## Traffic Calming Guidelines

### Type I: Dragon's Teeth

#### Description

Dragon's teeth are a series of triangular pavement markings along the edge of the travelled lanes. They may be painted with increasing size to give the impression of roadway narrowing. They provide a visual change of the roadway and are commonly used to alert drivers that they are entering a rural community.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** Primarily rural 2 lane (one in each direction)
- **Grade:** N/A
- **Locations to Avoid:** N/A



#### Potential Benefits

- **Speed Reduction:** Degree of speed reduction is dependent on the use of other traffic calming measures along the roadway (minimal demonstrated effect if used alone).

#### Design Considerations:<sup>34</sup>

Each triangular pavement marking in a dragon's teeth application is typically 2 ft wide, 2 ft tall, and spaced approximately 5 ft apart from an adjacent pair of teeth. There is no specific constraint to the number of teeth used, but typically between 9 and 17 pairs of teeth are used.

#### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Maintenance:** Due to the nature of the elements used to implement this treatment, its implementation will require recurring maintenance/reapplication.
- **Implementation Cost:** Low

<sup>3</sup> [https://intrans.iastate.edu/app/uploads/2018/03/updated\\_rural\\_traffic\\_calming\\_w\\_cvr2.pdf](https://intrans.iastate.edu/app/uploads/2018/03/updated_rural_traffic_calming_w_cvr2.pdf)

<sup>4</sup> [https://www.sabre-roads.org.uk/wiki/index.php?title=Dragon%27s\\_teeth](https://www.sabre-roads.org.uk/wiki/index.php?title=Dragon%27s_teeth)

## Traffic Calming Guidelines

### Type I: Full-Lane Transverse Bars

#### Description

Full-lane transverse bars are a series of parallel pavement markings which extend across most of the travelled lane width. The series of markings may be placed closer together with distance to create the illusion that a vehicle's speed is increasing to alert the driver of the need to reduce speed. Full-lane transverse bars are typically used on approaches to intersections, bridges, and deficient horizontal curves.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Grade:** N/A
- **Locations to Avoid:** N/A



#### Potential Benefits

- **Speed Reduction:**  
Degree of speed reduction is dependent on the use of other traffic calming measures along the roadway (minimal demonstrated effect if used alone).

#### Design Considerations:<sup>5</sup>

The TAC Canadian Guide to Traffic Calming provides design guidance for peripheral transverse bars that may be referred to when implementing full-lane transverse bars. As such, full-lane transverse bars should not be greater than 0.3 m in width, and the recommended spacing between bars varies depending on the desired target speed and the speed differences. More details specific to spacing between sequential pairs of full-lane transverse bars measured upstream from the point at which the desired speed is to be achieved (ranging between 30 km/h to 80 km/h) are provided in the TAC Canadian Guide to Traffic Calming under design guidelines for peripheral transverse bars.

#### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Maintenance:** Due to the nature of the elements used to implement this treatment, its implementation will require recurring maintenance/reapplication.
- **Implementation Cost:** Low

<sup>5</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

### Type I: Peripheral Transverse Bars

#### Description

Peripheral transverse bars are a series of parallel pavement markings along the edge of the travelled lane widths. The series of markings may be placed closer together with distance to create the illusion that a vehicle's speed is increasing. Peripheral transverse bars are like full-lane transverse bars, but require less maintenance of the markings.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Grade:** N/A
- **Locations to Avoid:** N/A



#### Potential Benefits

- **Speed Reduction:** Degree of speed reduction is dependent on the use of other traffic calming measures along the roadway (minimal demonstrated effect if used alone).

#### Design Considerations:<sup>6</sup>

Peripheral transverse bars should not be greater than 0.3 m in width and should not extend more than 0.5 m into the lane. The recommended spacing between bars varies depending on the desired target speed and the speed differences. Details regarding spacing between sequential pairs of peripheral transverse bars measured upstream from the point at which the desired speed is to be achieved (ranging between 30 km/h to 80 km/h) are provided in the TAC Canadian Guide to Traffic Calming.

#### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Maintenance:** Due to the nature of the elements used to implement this treatment, its implementation will require recurring maintenance/reapplication.
- **Implementation Cost:** Low

<sup>6</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines


### Type I: On-Road Sign Pavement Markings

#### Description

On-road 'sign' pavement markings provide information that would typically be communicated to drivers through posted signage but are instead painted on the roadway to provide a larger image directly in the driver's line of sight. These markings may be used as a gateway to alert drivers they are entering a school zone, school crossing, or neighbourhood. Examples include the set speed limit (i.e. 40 km/h), 'SLOW', or 'School Ahead'.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Grade:** N/A
- **Locations to Avoid:** N/A

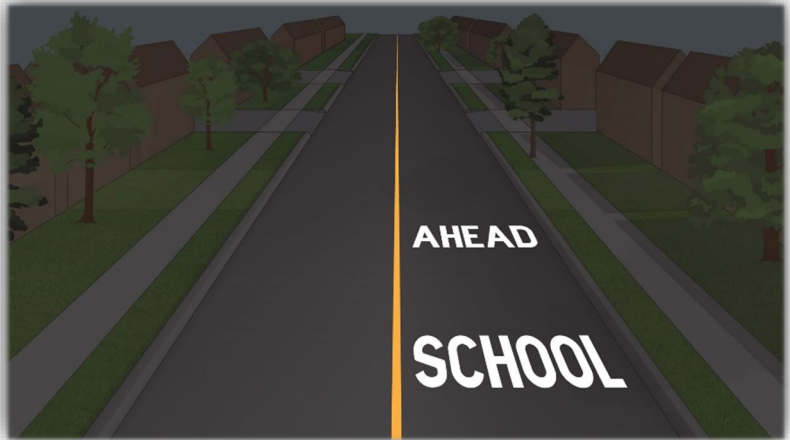

#### Potential Benefits

- **Speed Reduction:** Degree of speed reduction is dependent on the use of other traffic calming measures along the roadway (minimal demonstrated effect if used alone).

#### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Enforcement:** It is important to note that the implementation of any form of pavement markings is not enforceable as per the Highway Traffic Act – unless used in conjunction with other types of traffic calming measures (i.e. community safety zones).
- **Maintenance:** Due to the nature of the elements used to implement this treatment, its implementation will require recurring maintenance/reapplication. Visibility of these measures may be significantly reduced during winter (snow/ice cover and removal due to winter maintenance activities).
- **Implementation Cost:** Low



## Traffic Calming Guidelines

### Type I: Speed Display Devices

#### Description

A speed display device is a pole-mounted device equipped with radar speed detector and an LED display. The devices can detect the speed of an approaching vehicle and display it back to the driver. The objective of the speed display device is to improve road safety by making drivers aware of their speed, evoking voluntary speed compliance. Speed display devices are most effective on single lane roads and can be used upstream of staffed speed enforcement.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes (measure may be less effective or less accurate on heavily trafficked roads)
- **Cross-Section:** N/A (measure may be less effective or less accurate on multi-lane roads)
- **Grade:** N/A
- **Locations to Avoid:** N/A

#### Potential Benefits

- **Speed Reduction:** Speed reduction between 3 and 14 km/h can be achieved.



#### Design Considerations:<sup>78</sup>

The active display text must be a minimum of 200 mm high and should be clearly visible from any part of the approach lanes from distances between 45 m and 200 m. In rural areas without raised curbs, the device should ideally be installed 2 to 4 m from the edge of the outer travel lane. In urban or residential areas with raised curbs, the device should ideally be placed between 300mm to 2 m from the curb lane.

#### Other Considerations


- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Enforcement:** Speed display devices may lose their effectiveness if there is no perception of enforcement – they are much more effective when used in conjunction with staffed speed enforcement downstream.

<sup>7</sup> Ontario Traffic Manual Book 10 – Dynamic Message Signs, Ministry of Transportation of Ontario, December 2007.

<sup>8</sup> Ontario Traffic Manual Book 1B – Sign Design Principles, Ministry of Transportation of Ontario, July 2001.

## Traffic Calming Guidelines

- **Maintenance:** Due to the nature of the elements used to implement this treatment, its implementation requires recurring maintenance. Consideration should be given to asset replacements/life cycle management for this technology.
- **Implementation Cost:** Low to Medium

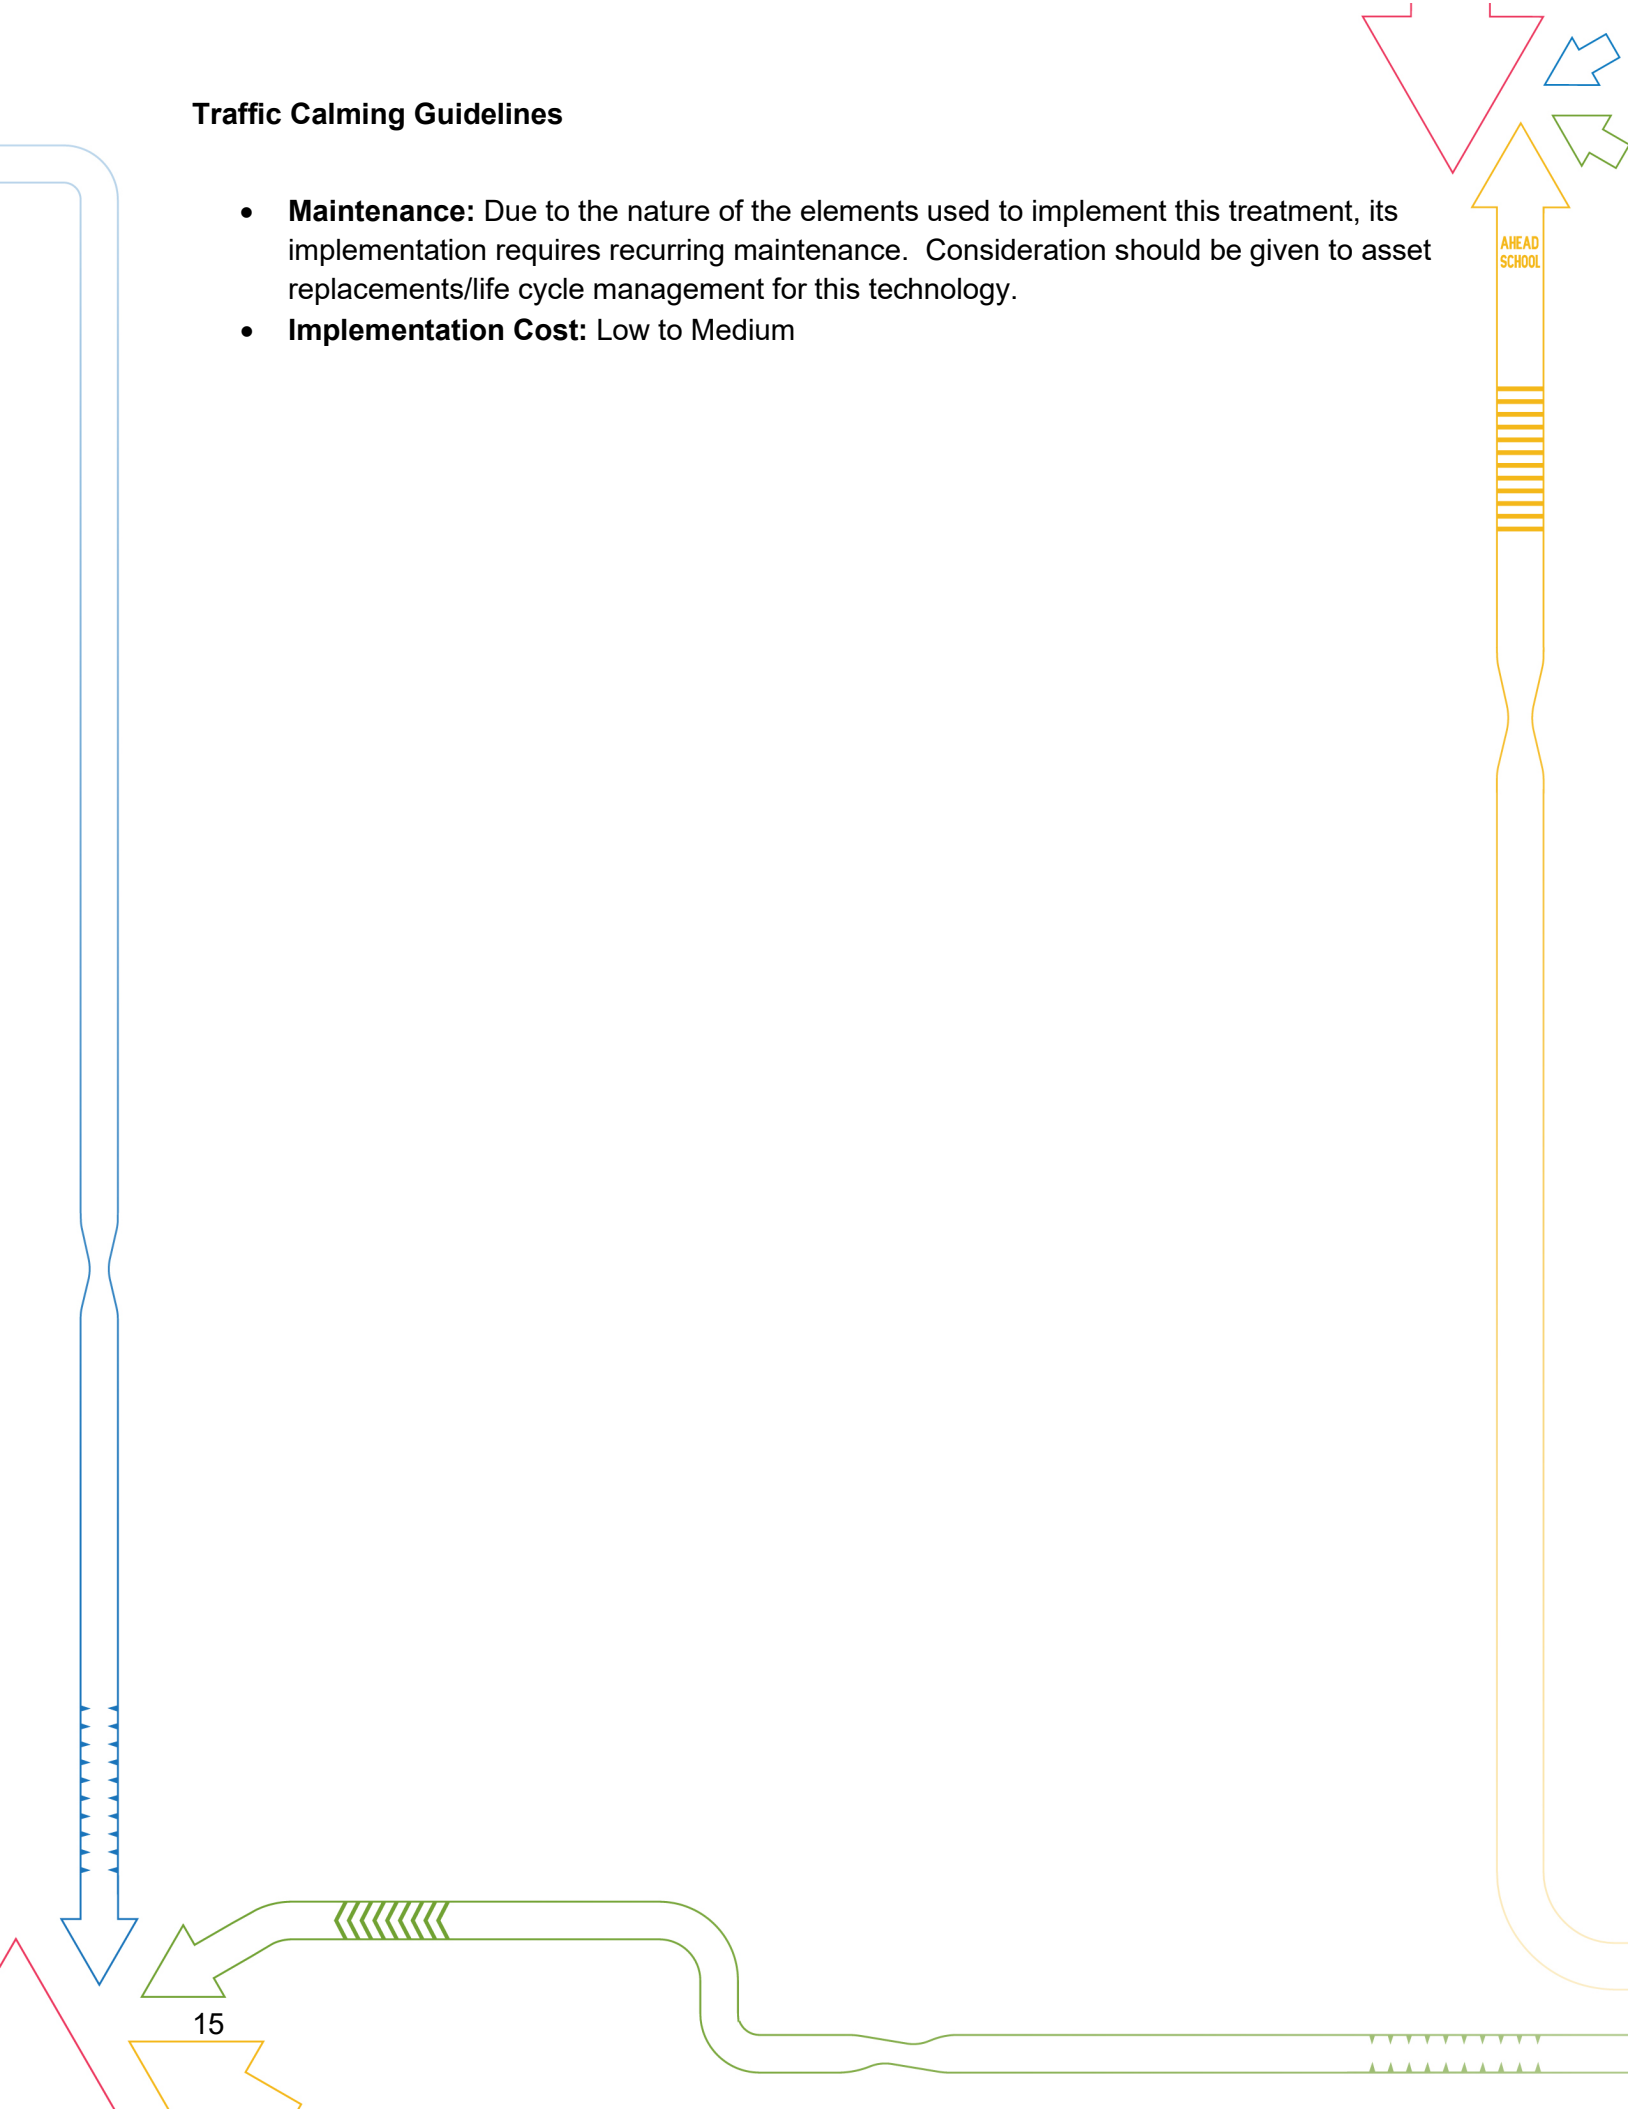

## Traffic Calming Guidelines

### Type I: Mobile Changeable Message Signs

#### Description

Mobile changeable message signs are electronic roadside warning signs with an illuminated screen that displays messages related to road safety. The purpose of these signs is to alert drivers to reduce their travel speed as they approach specific conditions or hazards ahead.

#### Applicability

- **Road Type:** Local Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Grade:** N/A
- **Locations to Avoid:** N/A

#### Potential Benefits

- **Speed Reduction:** Speed reduction up to 10 km/h can be achieved

#### Design Considerations:<sup>910</sup>

Mobile changeable message signs are to be placed such that the messages are visible to approaching motorists for at least 200 m.

In areas with no pedestrians, install the sign between 1.5 m and 2.5 m from the other edge of the outer lane (if no curbs are present) or from the curb line (if raised curbs are present) to the bottom of the sign. In areas with pedestrians, install the sign 2 m to 3 m from the ground elevation (measuring from the base of the signpost to the bottom of the sign).

In rural areas without raised curbs, install the measure between 2 m and 4 m from the edge of the outer travel lane. In urban or residential areas with raised curbs, install the measure between 30 cm and 2 m from the curb lane.

#### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Maintenance:** Due to the nature of the elements used to implement this treatment, its implementation requires periodic inspection and maintenance.
- **Implementation Cost:** Low to Medium



<sup>9</sup> Ontario Traffic Manual Book 10 – Dynamic Message Signs, Ministry of Transportation of Ontario, December 2007.

<sup>10</sup> Ontario Traffic Manual Book 1B – Sign Design Principles, Ministry of Transportation of Ontario, July 2001.

### Type II (Engineered-based) Measures: Horizontal Deflections

#### Curb Extension

##### Description


A curb extension (also known as a neckdown, choker, curb bulb, or bulb-out) is a horizontal intrusion of the curb into the roadway, resulting in a narrow section of roadway. The curb is extended on one or both sides of the roadway to reduce its width. The purpose of a curb extension is to reduce vehicle speeds, reduce crossing distance for pedestrians, increase visibility of pedestrians, and prevent parking close to an intersection.

Cycle-friendly bulb-outs can be considered as an alternative to traditional curb extensions in areas with higher bicycle volumes or when a cycling facility is part of the right-of-way. Cycle-friendly bulb-outs are horizontal projections of curbs into roadways that provides space for cyclists to ride over or through them.

Curb modifications may be required when installing cycle-friendly bulb-outs. A cycle-friendly bulb-out located at-grade and flush with the adjacent sidewalk allows cyclists to ride over it if a mountable curb is installed. Similarly, a cycle-friendly bulb-out located at-grade with a roadway and an adjacent median allows cyclists to ride through it, creating separation between cyclists and motor traffic.

##### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban
- 
- **ADT:** All traffic volumes
- **Cross-Section:** Max. 2 lane roadway
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:** N/A

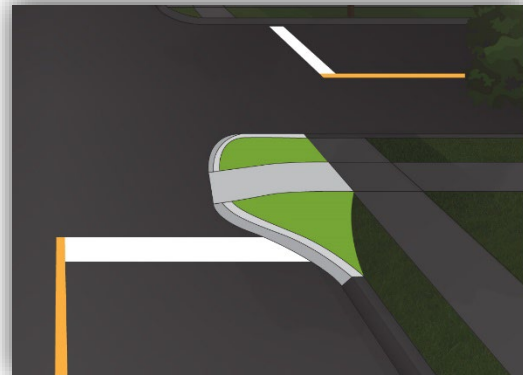

##### Potential Benefits

- **Speed Reduction:** Speed reduction of up to 8 km/h can be achieved.

##### Geometric Design Considerations<sup>11</sup>

Curb extensions are commonly implemented at intersections to reduce roadway width on one or both streets. Curb extensions may also be located midblock on one or both sides of a street to reduce roadway width.

To maximize effectiveness, the lane width approaching an intersection is typically reduced to 3.0 m. If local conditions allow, a minimum approach lane width of 2.5 m can be used. However, the departure lane width should remain at 3.0 m, resulting in a minimum total lane width of 5.5

<sup>11</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

m. When curb extensions are used on diagonally opposite corners of an intersection, a minimum clear offset of 5.0 m is required.

To provide proper guidance to drivers and ensure that vehicles are correctly oriented, each curb extension at the intersection should be 5.0 to 7.0 m in length. Curb extensions that serve as bus stops must be long enough to accommodate the longest bus expected to use the street.

At a midblock curb extension, 3.0 m lane widths are typical, but a minimum of 2.75 m lanes can be used if local conditions allow, resulting in a minimum total lane width of 5.5 m. Midblock curb extensions should also be long enough to accommodate a potential crosswalk and possible transitions in elevation, resulting in a desirable minimum length of 7.0 m.

Provision for turning movements made by emergency, service, and transit vehicles must be considered when designing a curb extension. Depressed curbs may be used to accommodate these vehicles, but potential risks to pedestrians should be evaluated.

### Signing and Pavement Marking Design Considerations<sup>12</sup>

Depending on the visibility of the curb extensions, the installation of Object Markers (Wa-33) may be considered to improve their visibility. Object Markers should be installed in areas with heavy snowfall at the leading edge of each curb extension and at locations where there may be any concern regarding the sudden introduction of a curb extension into the roadway.

Consideration can also be given to using bollards with reflective striping as an alternative to Object Markers.

### Other Considerations


- **Local Vehicle Access:**
  - Implementation of this type of traffic calming measure does not affect local traffic access
  - Large vehicles such as long trucks and busses may need to cross into oncoming travel lanes to conduct turns at intersections with curb extensions
- **Emergency Services:** No significant impact on emergency service response times.
- **Active Transportation:**
  - Reduces pedestrian crossing distance / improves mutual visibility between pedestrians and motorists (if crosswalks are installed between curb extensions), which may reduce pedestrian-vehicle conflicts
  - Consider cyclists during the design process (i.e. curb extensions may impact dedicated cycling facilities)
  - Cyclists can feel squeezed closer to vehicles as motorists may attempt to overtake them at narrowing points
  - Curb extensions can be hazardous for drivers and cyclists if they are not designed and maintained properly – depressions or off-road connections for

<sup>12</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

cyclists to navigate around or over curb bumpouts may be considered along cycling routes

- **Parking:** Requires removal/restriction of on-street parking at the locations of the curb extensions.
- **Maintenance:**
  - Can create constraints and challenges for snow plowing and snow removal. Potential for impacts such as snowplow damage to grass, trees, and curb extensions, and/or increased costs for winter maintenance (e.g. if snow removal required).
  - Roadway's effective width can be significantly reduced during winter months, dependent on the design and snow removal/winter control activities for the area. Consideration can be given to temporary restrictions such as parking restrictions if required during winter months to facilitate this change and maintain winter control activities.
  - Consideration required for existing drainage elements such as catch basins, concrete channels, gutters, inlets, and trench drains.
- **Streetscaping:** Landscaped curb extensions can improve the appearance of a street; however, opportunities may be limited depending on the scope and size of the curb extensions.
- **Implementation Cost:** Low to Medium

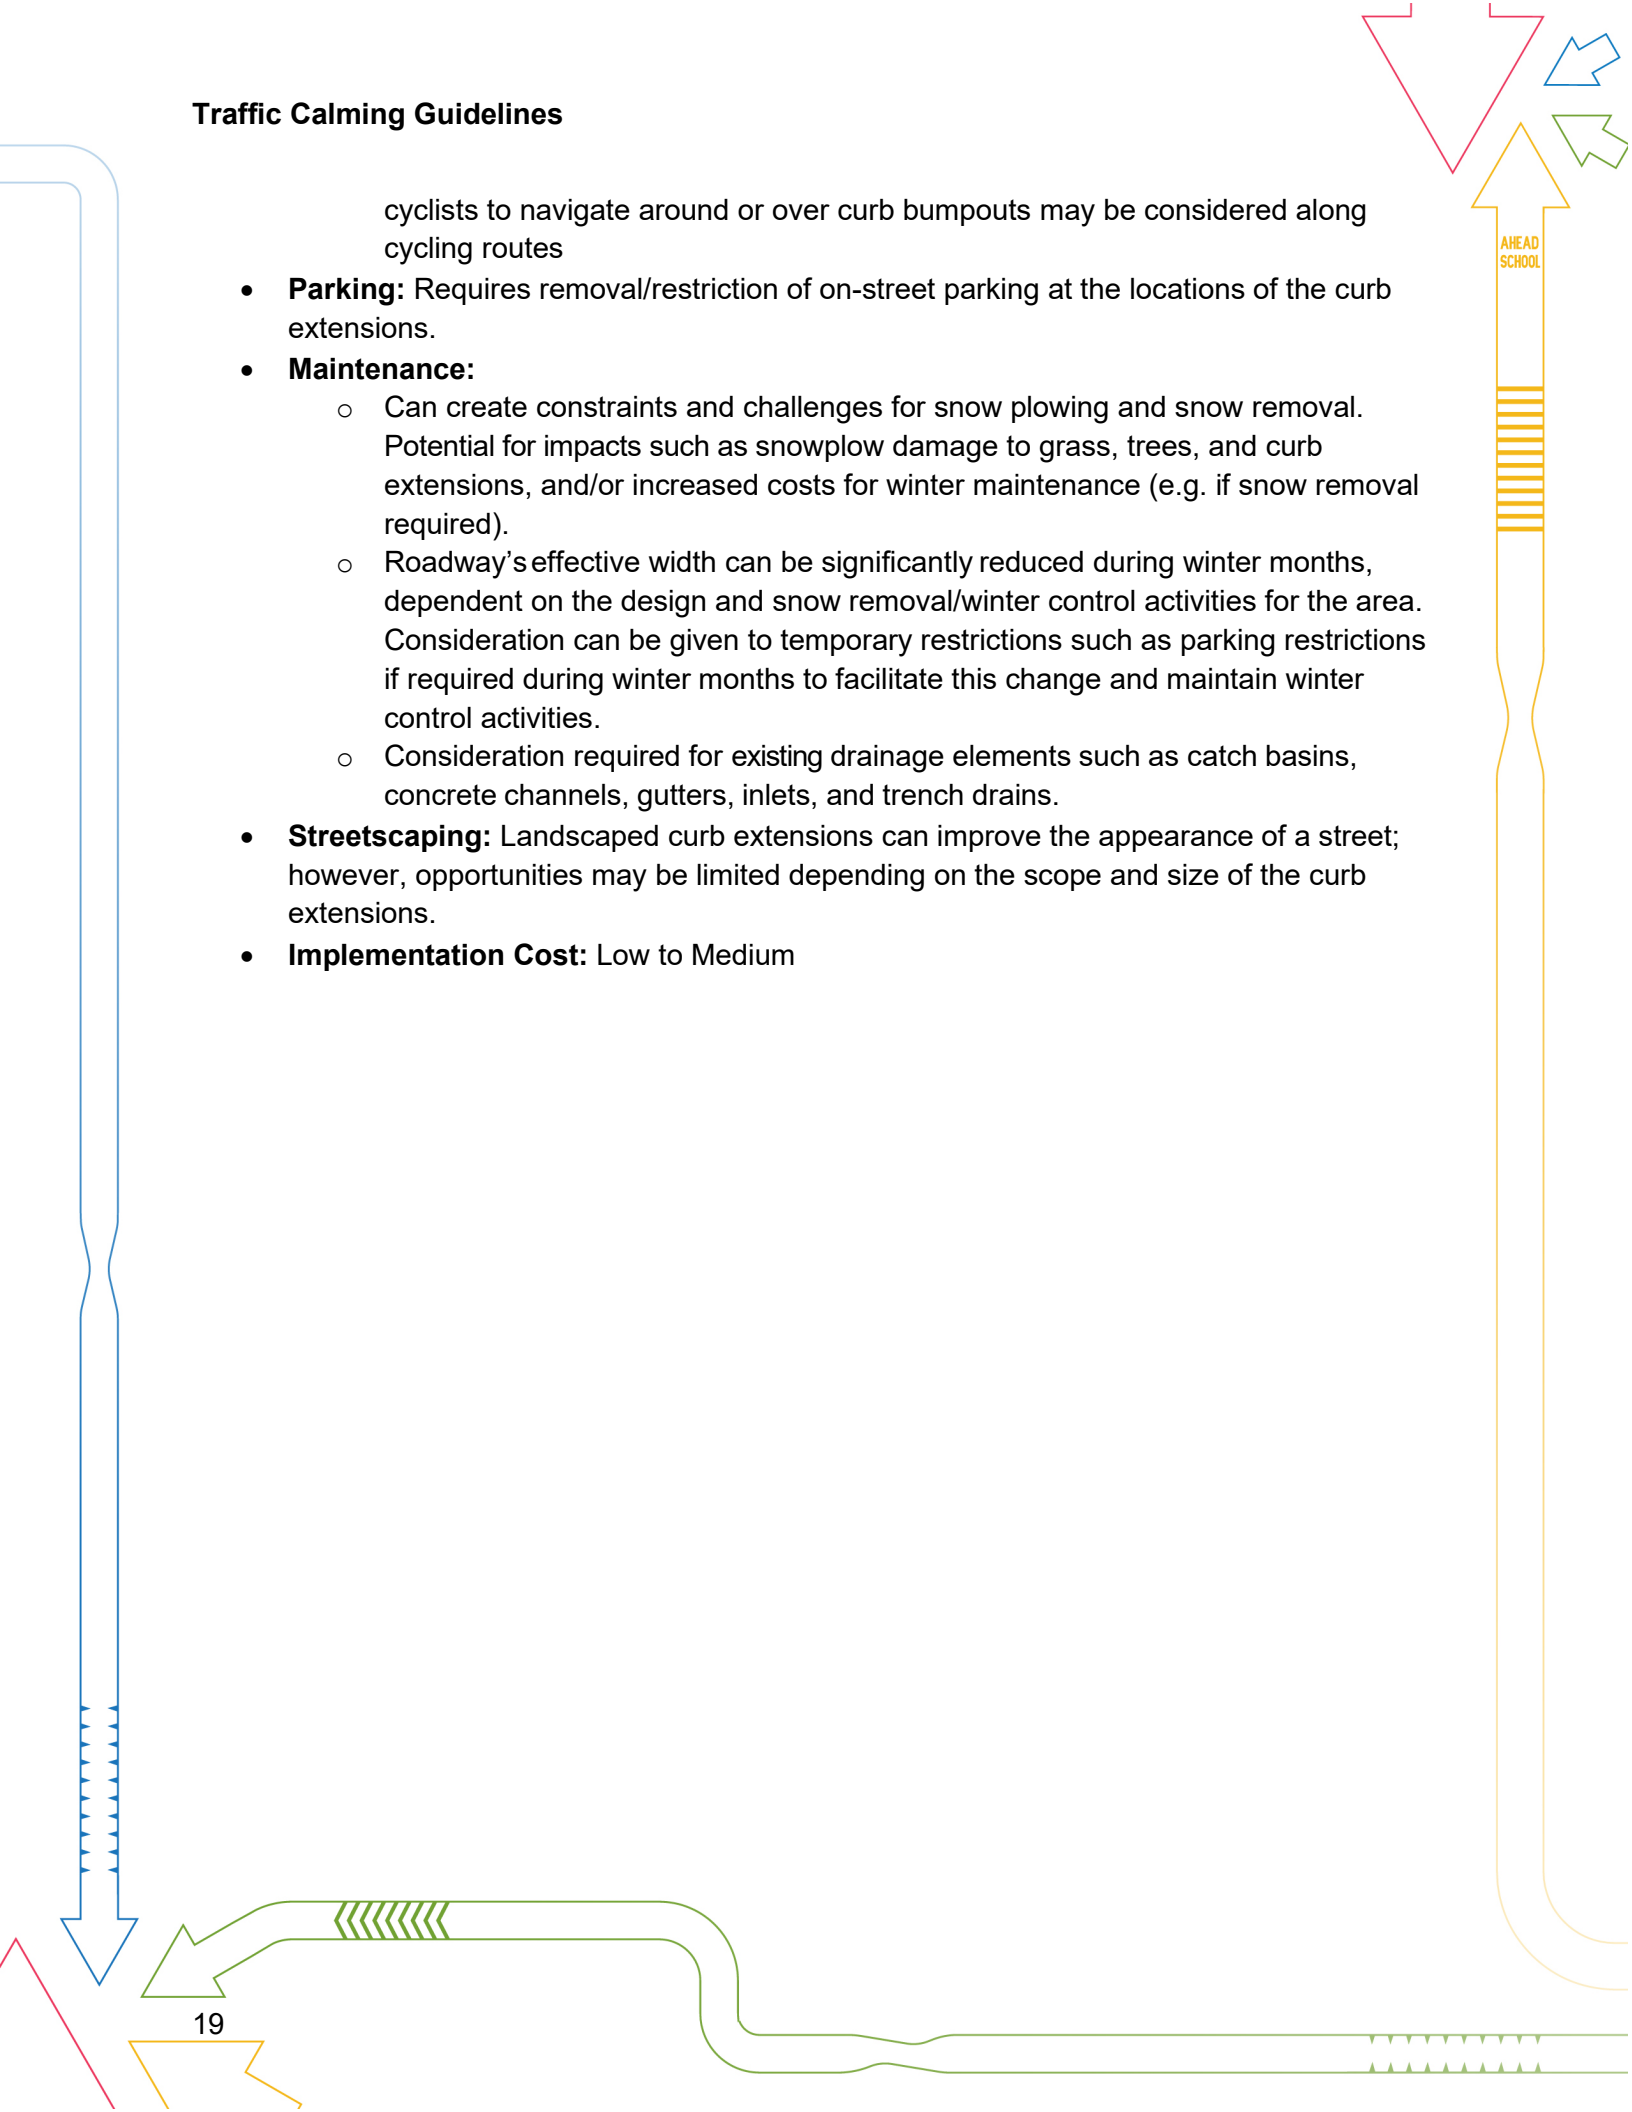

## Traffic Calming Guidelines

### Type II: Raised Median Island

#### Description

A raised median island is a physical barrier located in the median between two directions of traffic and are typically installed on two-way roadways. Median islands narrow the roadway causing motorists to slow down. They may be used as a pedestrian crossing refuge as well.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** Most effective on 2 lane roadways (one each direction)
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:**  
N/A

#### Potential Benefits

- **Speed Reduction:**  
Speed reductions between 3 and 8 km/h can be achieved.



#### Geometric Design

##### Considerations<sup>13</sup>

The width of a single lane adjacent to a raised median island should ideally not exceed 3.5 m, recommended to target minimum lane width of 3.3m. The length of any individual median section at an intersection or midblock crossing should be a minimum of 5.0 m to 7.0 m. Its maximum length should be dependent on local factors such as the location of nearby driveways and adjacent intersections. If raised median islands are being used in conjunction with a midblock crosswalk, a minimum width of 1.5 m should be provided between islands (i.e. within the crosswalk area).

Raised median islands should have a minimum width of 1.5 m to adequately protect any signing required in the median and to provide pedestrians with a minimum refuge area.

##### Signing and Pavement Marking Design Considerations<sup>13</sup>

Each end of a raised median island section must have a Keep Right sign (Rb-25) to guide traffic to the right of the island. An Object Marker (Wa-33L) is considered optional but should be installed at locations where the visibility of raised median islands may be obscured for motorists.

<sup>13</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.


## Traffic Calming Guidelines

Additionally, Stopping Prohibited signs (Rb-55) are required within the area of the raised median island to preserve lane widths and maintain traffic flow.

If raised median islands are being used at midblock crosswalk locations (e.g. controlled crossings), Pedestrian Crossover signs (Ra-4) must be installed.

### Other Considerations

- **Local Vehicle Access:** May restrict access to driveways (from one direction only).
- **Emergency Services:** Consideration for larger vehicles along narrow roads. Implementation to consider design vehicle movements along corridor.
- **Active Transportation:**
  - Raised median islands can function as a pedestrian refuge, which may result in reduced pedestrian-vehicle conflicts
  - As a result of the narrowed roadway, cyclists and vehicular traffic will share the same travel lane in cases where dedicated cycling facilities are not provided
- **Parking:** Typically requires restricting on-street parking in the vicinity.
- **Maintenance:** Can create constraints and challenges for snow plowing and snow removal. Consideration must be given to the lane width and size of the plow/maintenance vehicles that would be servicing the area of the installation.
- **Streetscaping:** Aesthetic benefits if well-maintained planting within the raised median island is incorporated, however opportunities may be limited depending on the scope and size of the median.
- **Implementation Cost:** Low to Medium

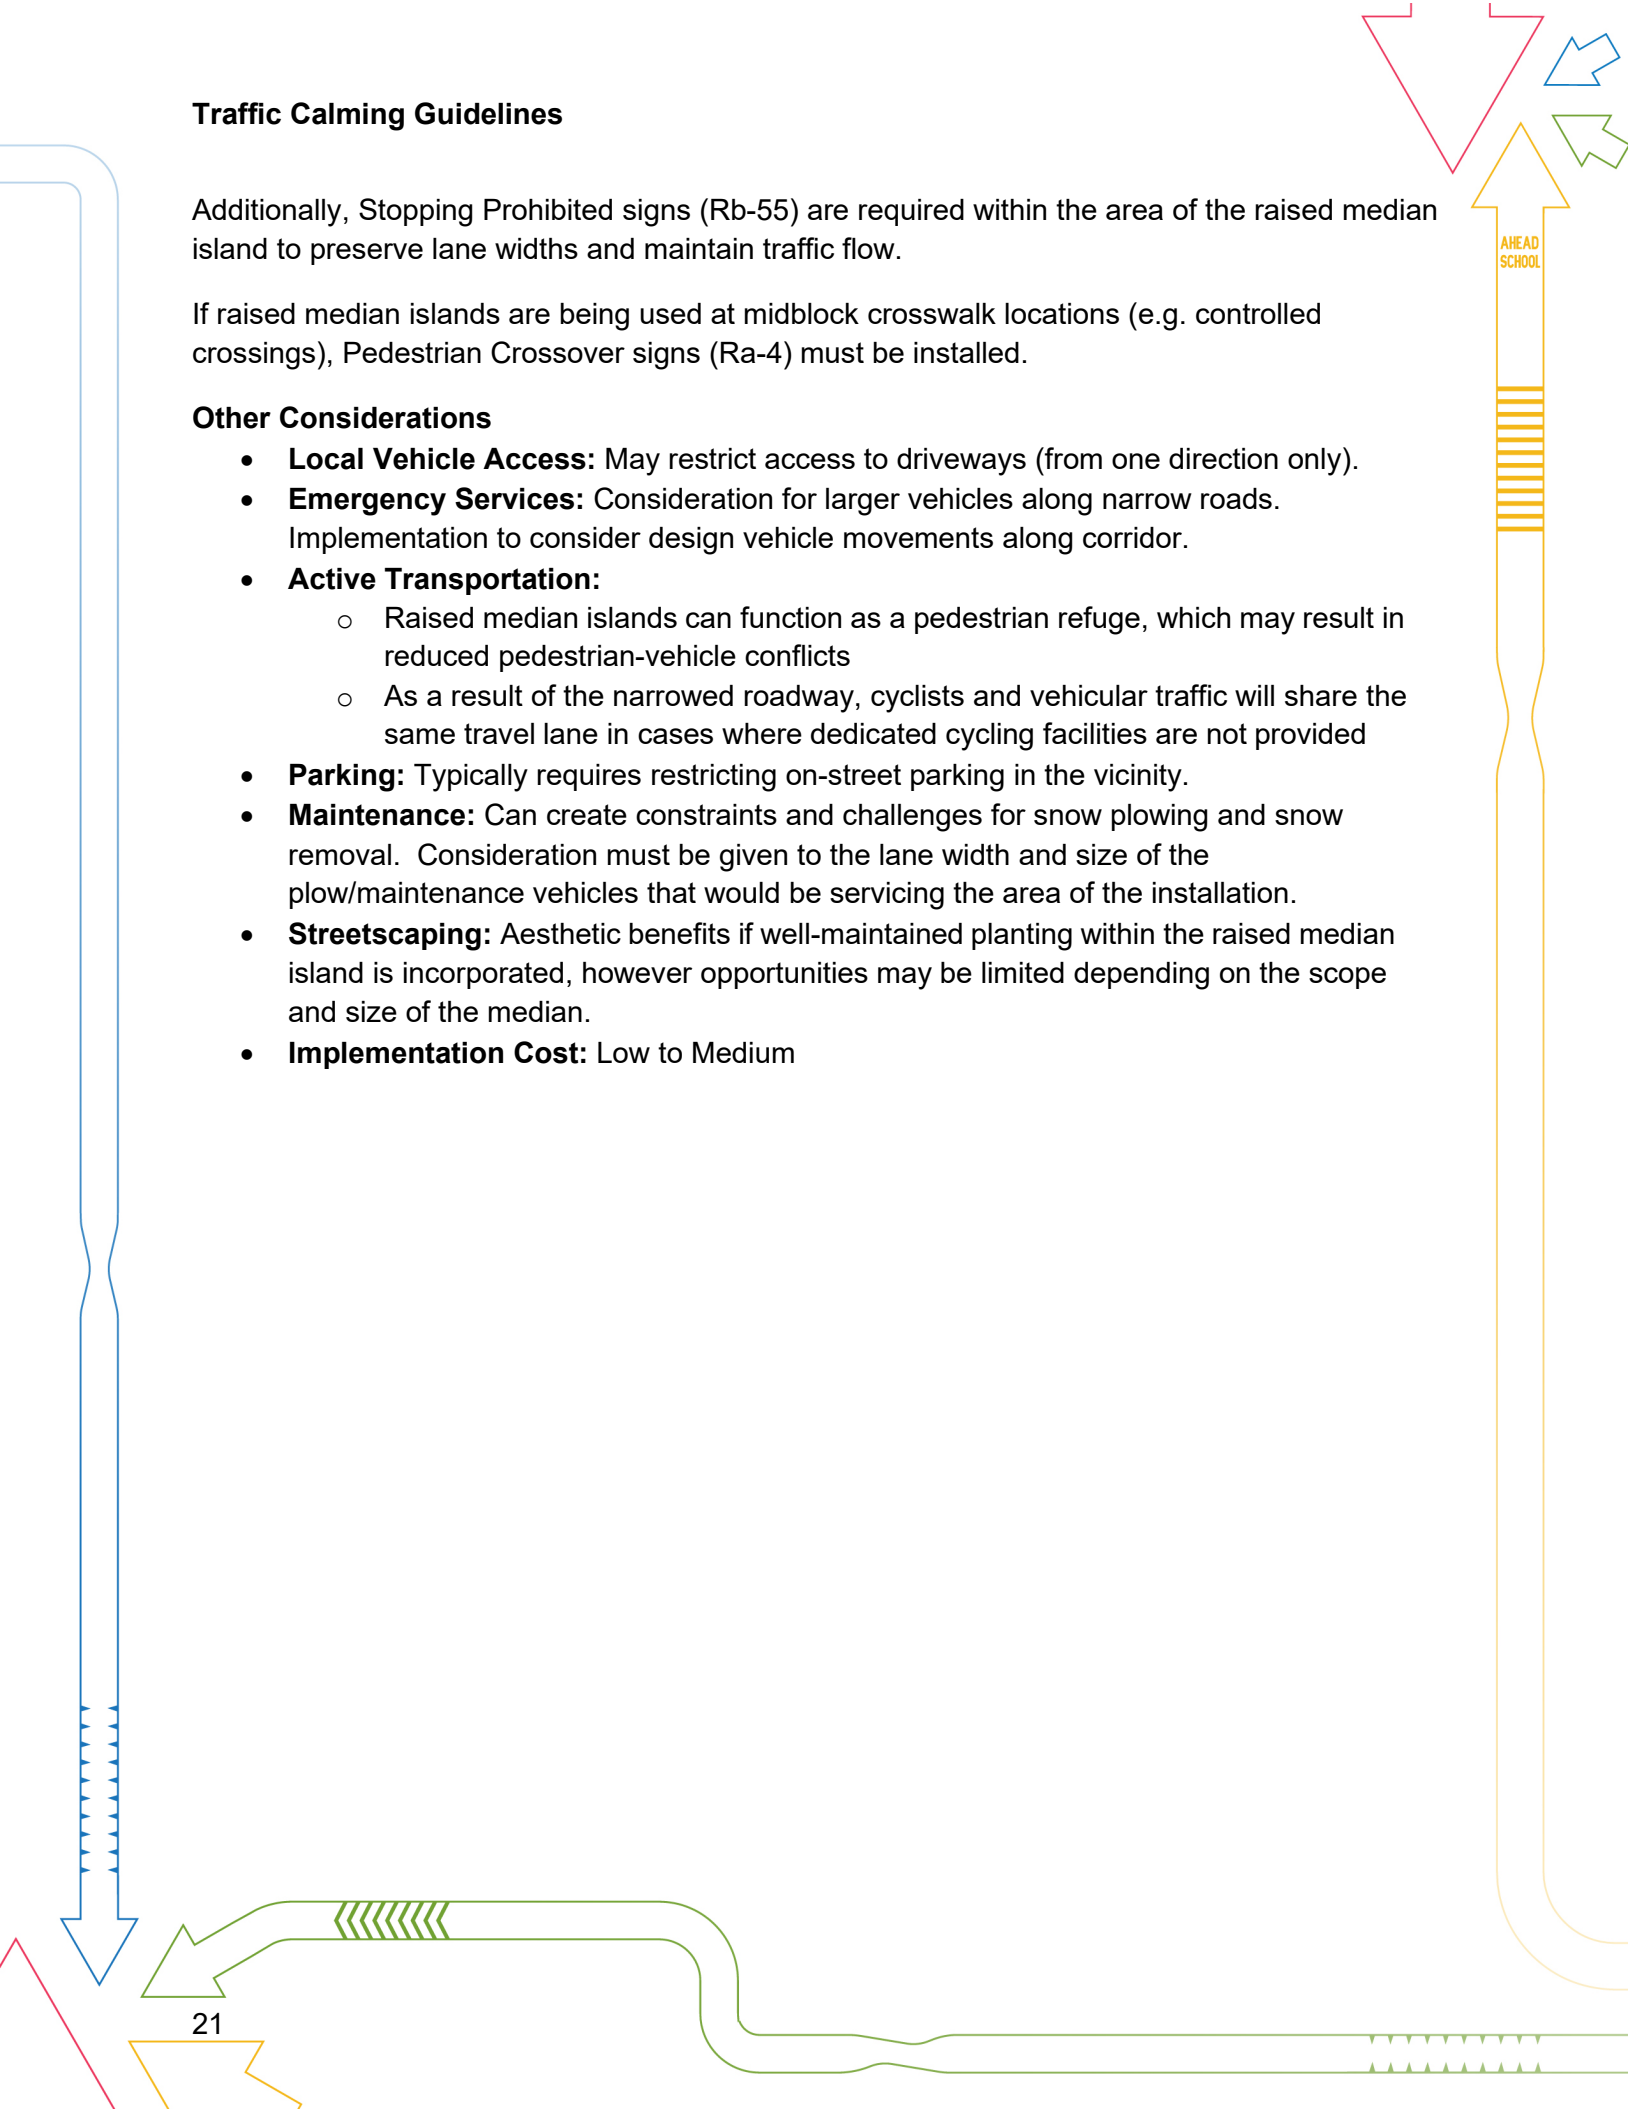



## Traffic Calming Guidelines

### Type II: Lateral Shift

#### Description

A lateral shift involves the redesign of a straight section of road with pavement markings or curb extensions to create a curve in the road, similar to a chicane, which the driver must navigate around. The purpose of a lateral shift is to increase a driver's awareness as they negotiate it, effectively reducing their operating speed. In some cases, a lateral shift may involve the redesign of a road (depending on the existing right-of-way/constraints).

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:** N/A



#### Potential Benefits

- **Speed Reduction:** A lateral shift can slow traffic by encouraging a driver to moderate vehicle speed through a single shift in roadway alignment (i.e. using curb extensions or pavement markings). The degree of speed reduction (or the final speed) depends on the length of the alignment shift, as well as the volume and distribution of traffic.
- **Volume Reduction:** Amount of traffic diversion is dependent on the number of measures along the roadway.

#### Design Considerations<sup>14</sup>

A typical lateral shift is simply one half of a typical chicane. The design considerations and dimensions are therefore similar to a typical chicane (see Design Considerations for a Chicane). A lateral shift of at least one-lane width and an angle of deflection of at least 45 degrees is a common industry target.


#### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Emergency Services:**
  - A lateral shift may affect emergency service response times – sufficient roadway width should be maintained to facilitate the movement of fire apparatus and other large vehicles.

<sup>14</sup> [https://safety.fhwa.dot.gov/speedmgt/ePrimer\\_modules/module3.cfm](https://safety.fhwa.dot.gov/speedmgt/ePrimer_modules/module3.cfm)

## Traffic Calming Guidelines

- **Active Transportation:** Dedicated cycling facilities have potential to be affected; design should consider this (e.g. if cycling facilities can be re-directed off-road through this area).
- **Enforcement:** Additional enforcement is not typically required, however implementation of this type of traffic calming measure may incite sharp cornering, braking and acceleration, and other aggressive driving behaviour.
- **Parking:** May require removal of on-street parking at the location of the lateral shift.
- **Maintenance:**
  - Can create constraints and challenges for snow plowing and snow removal, which may require specialized vehicles
  - Consideration should be given for existing drainage elements such as catch basins, concrete channels, gutters, inlets, and trench drains
  - Not anticipated to impact above- and below-grade utilities
  - May require careful consideration of the alignment and presence of at-grade utilities
- **Streetscaping:**
  - Low maintenance streetscaping can be considered in the design of traffic calming measures that intrude the roadway
  - Attention needs to be given to appearance to counter potential for visual clutter (i.e. signs or landscaping on curb extensions)
- **Implementation Cost:** Medium to High

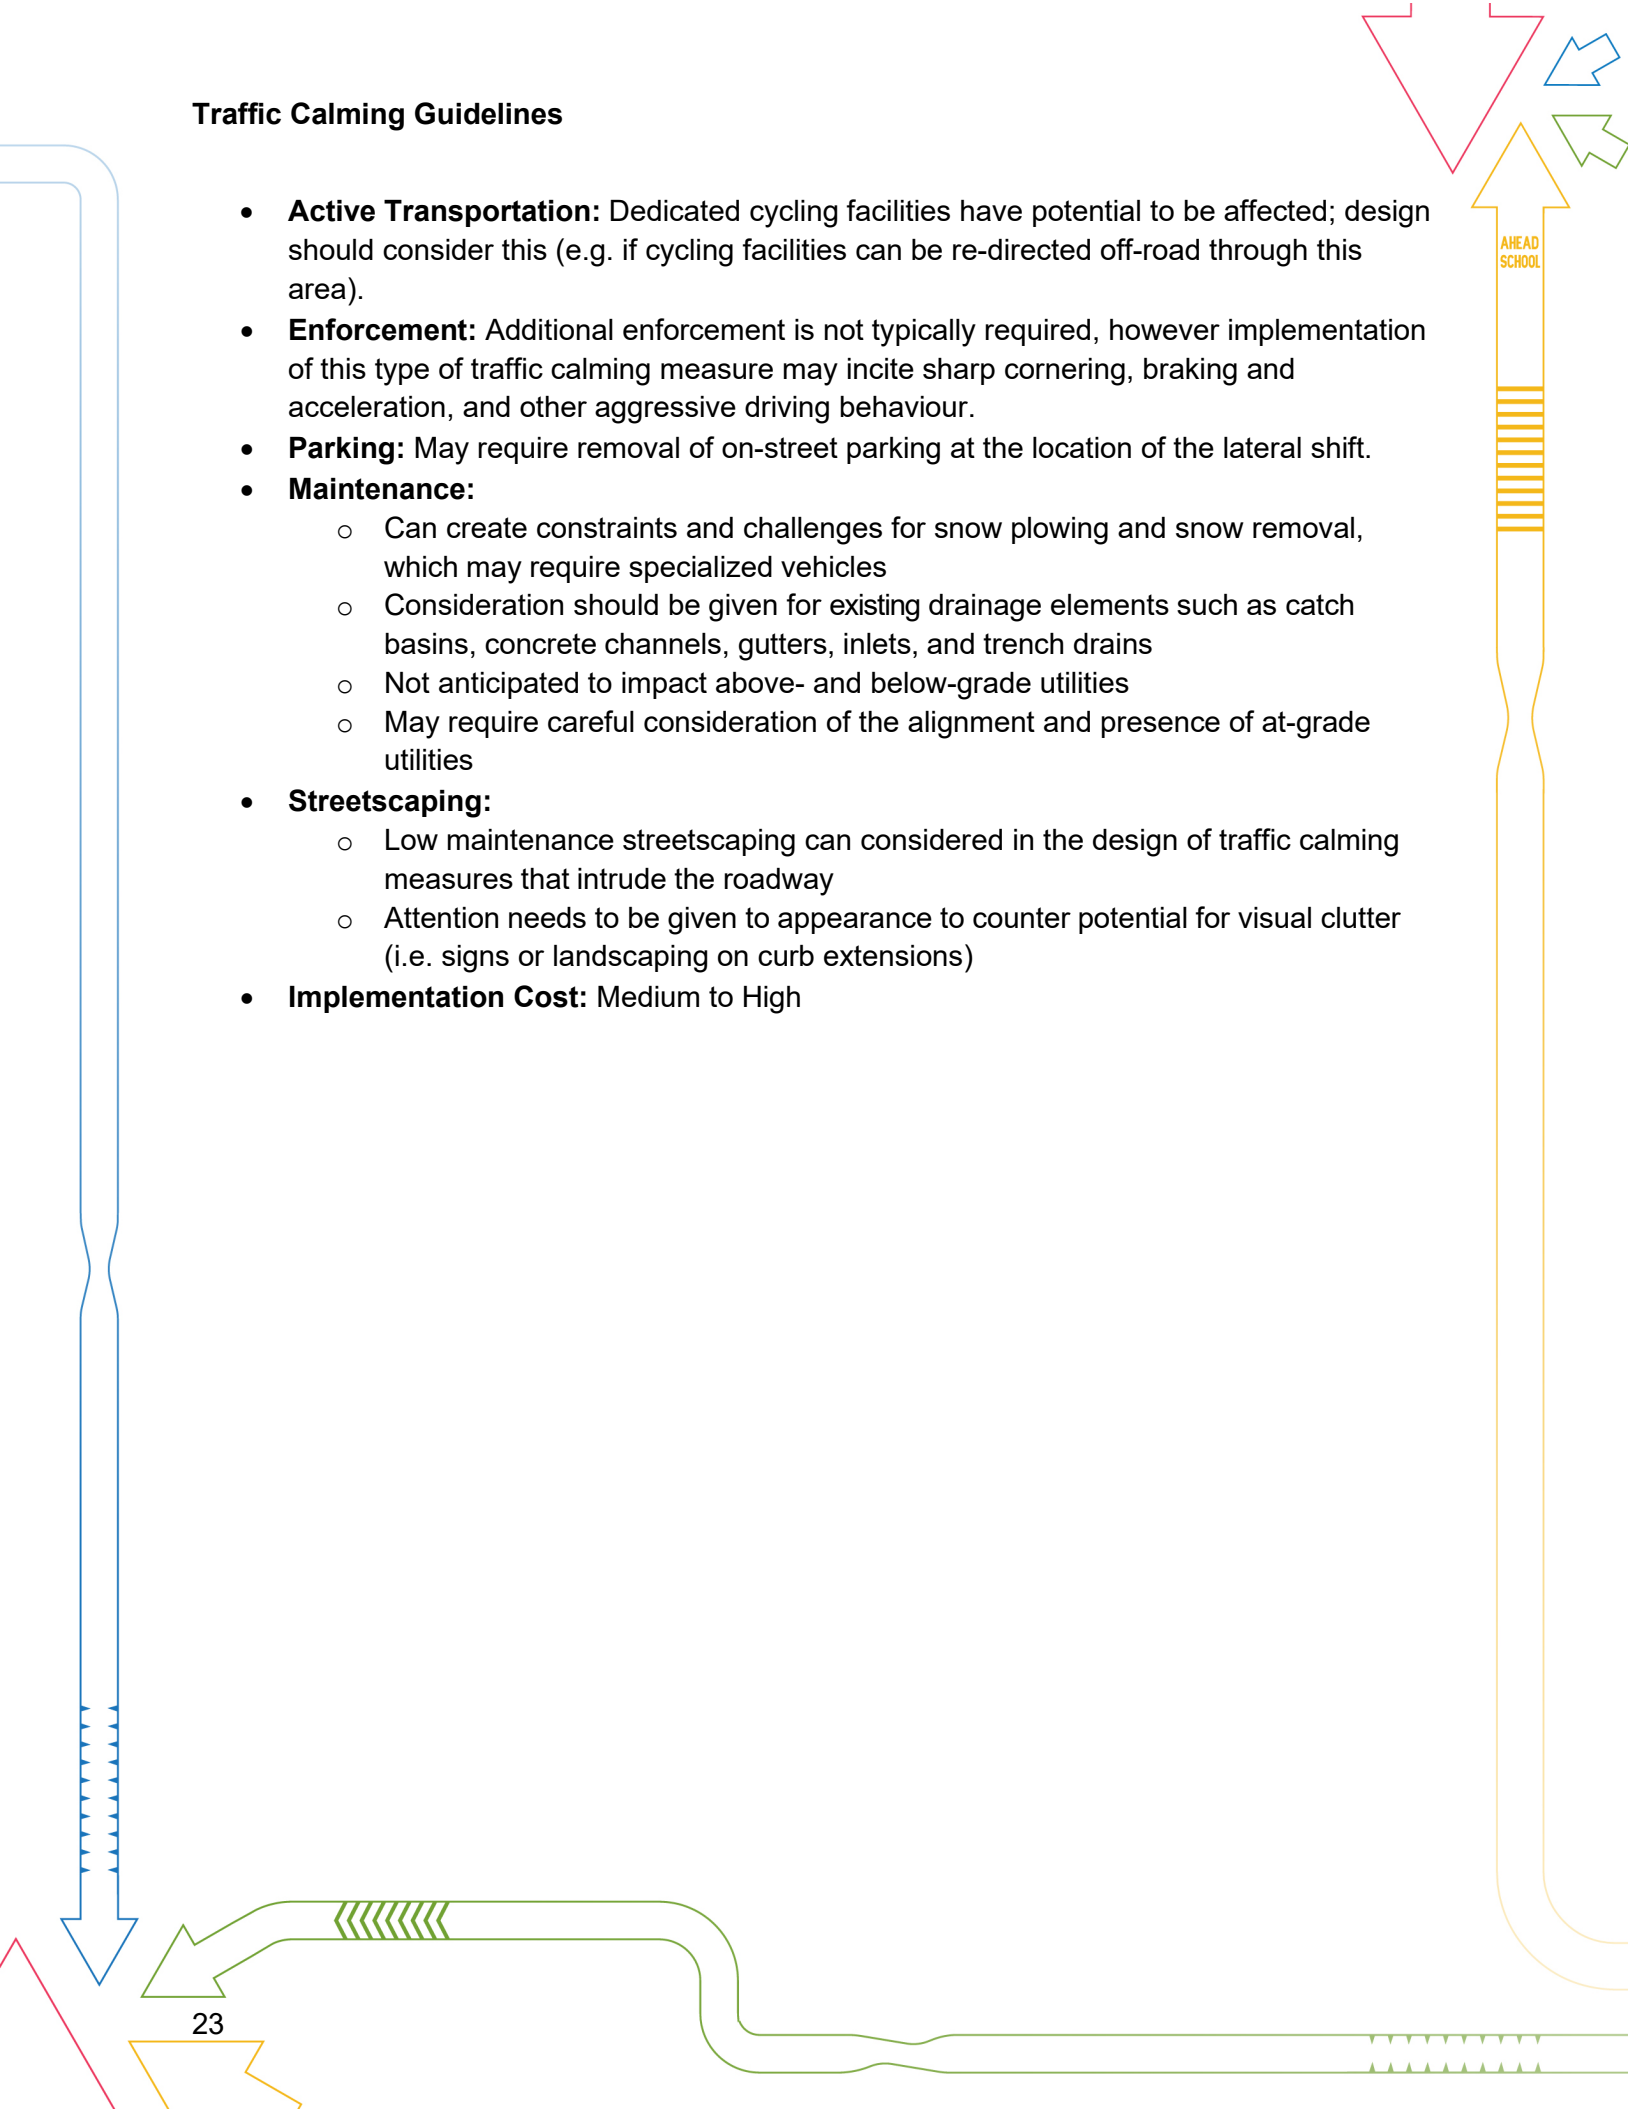

## Traffic Calming Guidelines

### Type II (Engineered-based) Measures: Vertical Deflections

#### Speed Hump/Table


##### Description

Speed humps are a vertical structure spanning across the width of a roadway (excluding gutters) designed to slow vehicle speeds. Speed humps are typically installed in series. Motorist discomfort is dependent on the size of the speed hump and the speed they are travelling.

Speed tables are speed humps with an extended flat top that can typically fit the length of a passenger vehicle across its width. Speed tables have higher design speeds than speed humps and maintain a smoother ride for larger vehicles. Speed tables are typically preferable on collector roads.

##### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban
- **ADT:** All traffic volumes
- **Cross-Section:** 2 lanes (one each direction) but can be used on one-way streets
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:**
  - Designated emergency access routes
  - Small turning radius curves and other areas with limited sight distance
  - Intersections
  - Driveways
  - Transit stops (placement of speed table/hump should be at least 25 m in advance of bus stops)
  - Traffic signals (locate at least 75 m distance from traffic signals so that the speed hump/table is not within the decision or braking zones).

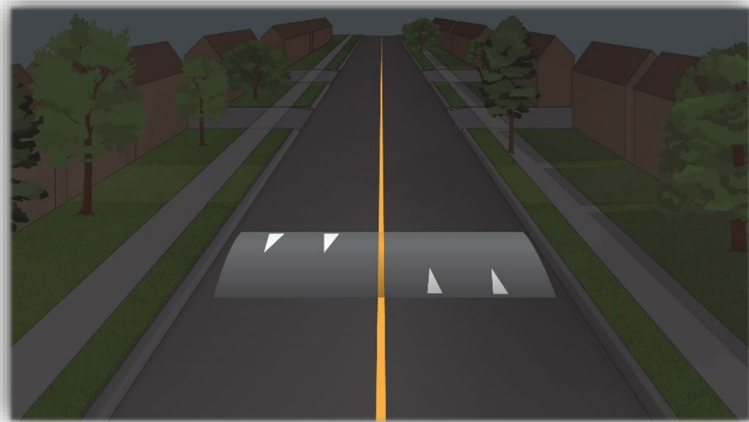

##### Potential Benefits

- **Speed Reduction:** Speed reduction between 6 and 13 km/h can be achieved
- **Volume Reduction:** Volume reduction between 15% and 27% can be achieved. Amount of traffic diversion is dependent on the number of measures along the roadway. Traffic may be diverted to parallel streets without traffic calming measures

## Traffic Calming Guidelines

### Geometric Design Considerations<sup>15</sup>

Speed humps and speed tables have similar configurations spanning across the entire width of a roadway except that speed tables typically have a flat top section 3.0 m long that is 80 mm high, which is more suitable for roads with higher design speeds. Speed humps/tables typically have lengths of 4.0 m or 7.0 m (measured in the direction of travel) when installed on local and collector streets, respectively. The vertical transition that is required at each end of a retrofit speed hump/table can be keyed into the existing pavement to minimize any damage to, and by, snow plowing equipment.

To effect slower vehicle speeds over a longer distance, speed humps/tables should be installed in series. For example, a spacing of 80 m to 150 m is recommended to maintain an 85<sup>th</sup> percentile operating speed between 40 and 48 km/h.

### Signing and Pavement Marking Design Considerations<sup>15</sup>

A Speed Hump warning sign (Wa-74) facing oncoming traffic should be installed directly adjacent to the hump/table to alert drivers of the vertical deflection. If sign or speed hump/table visibility is obscured, Speed Hump warning signs with distance tabs may be considered for installation in advance of the speed hump/table.

If a speed hump/table is being installed on a one-way street, Speed Hump warning signs should be installed on both sides of the road facing oncoming traffic. White triangular pavement markings that are approximately 0.6 m wide and spaced 1.5 m apart should be painted directly on the approach end of speed humps/tables.

### Other Considerations

- **Local Vehicle Access:** Traffic may be diverted to parallel streets without traffic calming measures.
- **Emergency Services:** It may have an effect on emergency service response times.
- **Active Transportation:** Consideration should be given to maintain the speed hump/table across the width of an adjacent bicycle lane or a physical separation (i.e. median, delineator posts) could be provided to 'protect' the bicycle lane from motorists trying to avoid the vertical deflection.
- **Parking:** May require removal of on-street parking at the location of the speed hump/table.
- **Maintenance:** Can create constraints and challenges for snow plowing and snow removal – plow operators must use caution to avoid damaging speed hump/table surface. Speed humps can also damage plow trucks themselves, increasing truck maintenance costs.
- **Implementation Cost:** Low to Medium

<sup>15</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

### Type II: Speed Cushions

#### Description

Speed cushions are a narrower version of a speed hump and are installed in the middle of each travel lane. They are designed to slow passenger vehicles while allowing vehicles with larger wheelbases (i.e. emergency vehicles and buses) to pass unimpeded. Speed cushions should be considered rather than speed humps on emergency response and transit routes. Speed cushions may be preferable on collector roads.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:**
  - Small turning radius curves and other areas with limited sight distance
  - Intersections
  - Driveways
  - Traffic signals (locate at least 75 m distance from traffic signals so that the speed cushion is not within the decision or braking zones).



#### Potential Benefits

- **Speed Reduction:** Vehicular speed reduction between 25 and 32 km/h has been observed at the top of speed cushions, however, the speed reduction declines with the distance to the measure by approximately 1 to 1.5 km/h every 30 m before and after the area of influence of the measure (approx. 60 m). Effectively reduces speed up to 8 km/h.
- **Volume Reduction:** Volume reduction of approximately 30% can be achieved. Amount of traffic diversion is dependent on the number of measures along the roadway. Traffic may be diverted to parallel streets without traffic calming measures.

#### Geometric Design Considerations<sup>16</sup>

It is typical to install one speed cushion per travel lane. The optimal width for speed cushions is 1.8 m, which is narrow enough to accommodate emergency vehicles but wide enough to slow passenger vehicles. The space between the cushions and the curb should be approximately 0.6

<sup>16</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

m, which is narrow enough such that motorists cannot maneuver to avoid the cushions but wide enough for cyclists and the tires of emergency vehicles to pass. If there are only two cushions installed (i.e. one in each direction), the distance between them must be at least 1.5 m to ensure that heavy vehicles do not pass too closely to one another.


### Signing and Pavement Marking Design Considerations

A Speed Hump warning sign (Wa-74) facing oncoming traffic should be installed directly adjacent to the speed cushion to alert drivers of the vertical deflection. If sign or speed cushion visibility is obscured, Speed Hump warning signs with distance tabs may be considered for installation in advance of the speed cushion.

If a speed cushion is being installed on a one-way street, Speed Hump warning signs should be installed on both sides of the road facing oncoming traffic. White triangular pavement markings that are approximately 0.4 m wide and spaced 0.6 m apart should be painted directly on the approach end of speed cushions (assuming an optimal speed cushion width of 1.8 m).

### Other Considerations

- **Local Vehicle Access:** Traffic may be diverted to parallel streets without traffic calming measures.
- **Emergency Services:** Speed cushions may affect smaller emergency vehicles (i.e. ambulance).
- **Active Transportation:** Consideration should be given to provide a physical separation (i.e. median, delineator posts) to 'protect' the bicycle lane from motorists trying to avoid the vertical deflection.
- **Parking:** May require removal of on-street parking at the location of the speed cushion.
- **Maintenance:** Can create constraints and challenges for snow plowing and snow removal; plow operators must use caution to avoid damaging speed cushion surface.
- **Implementation Cost:** Low to Medium

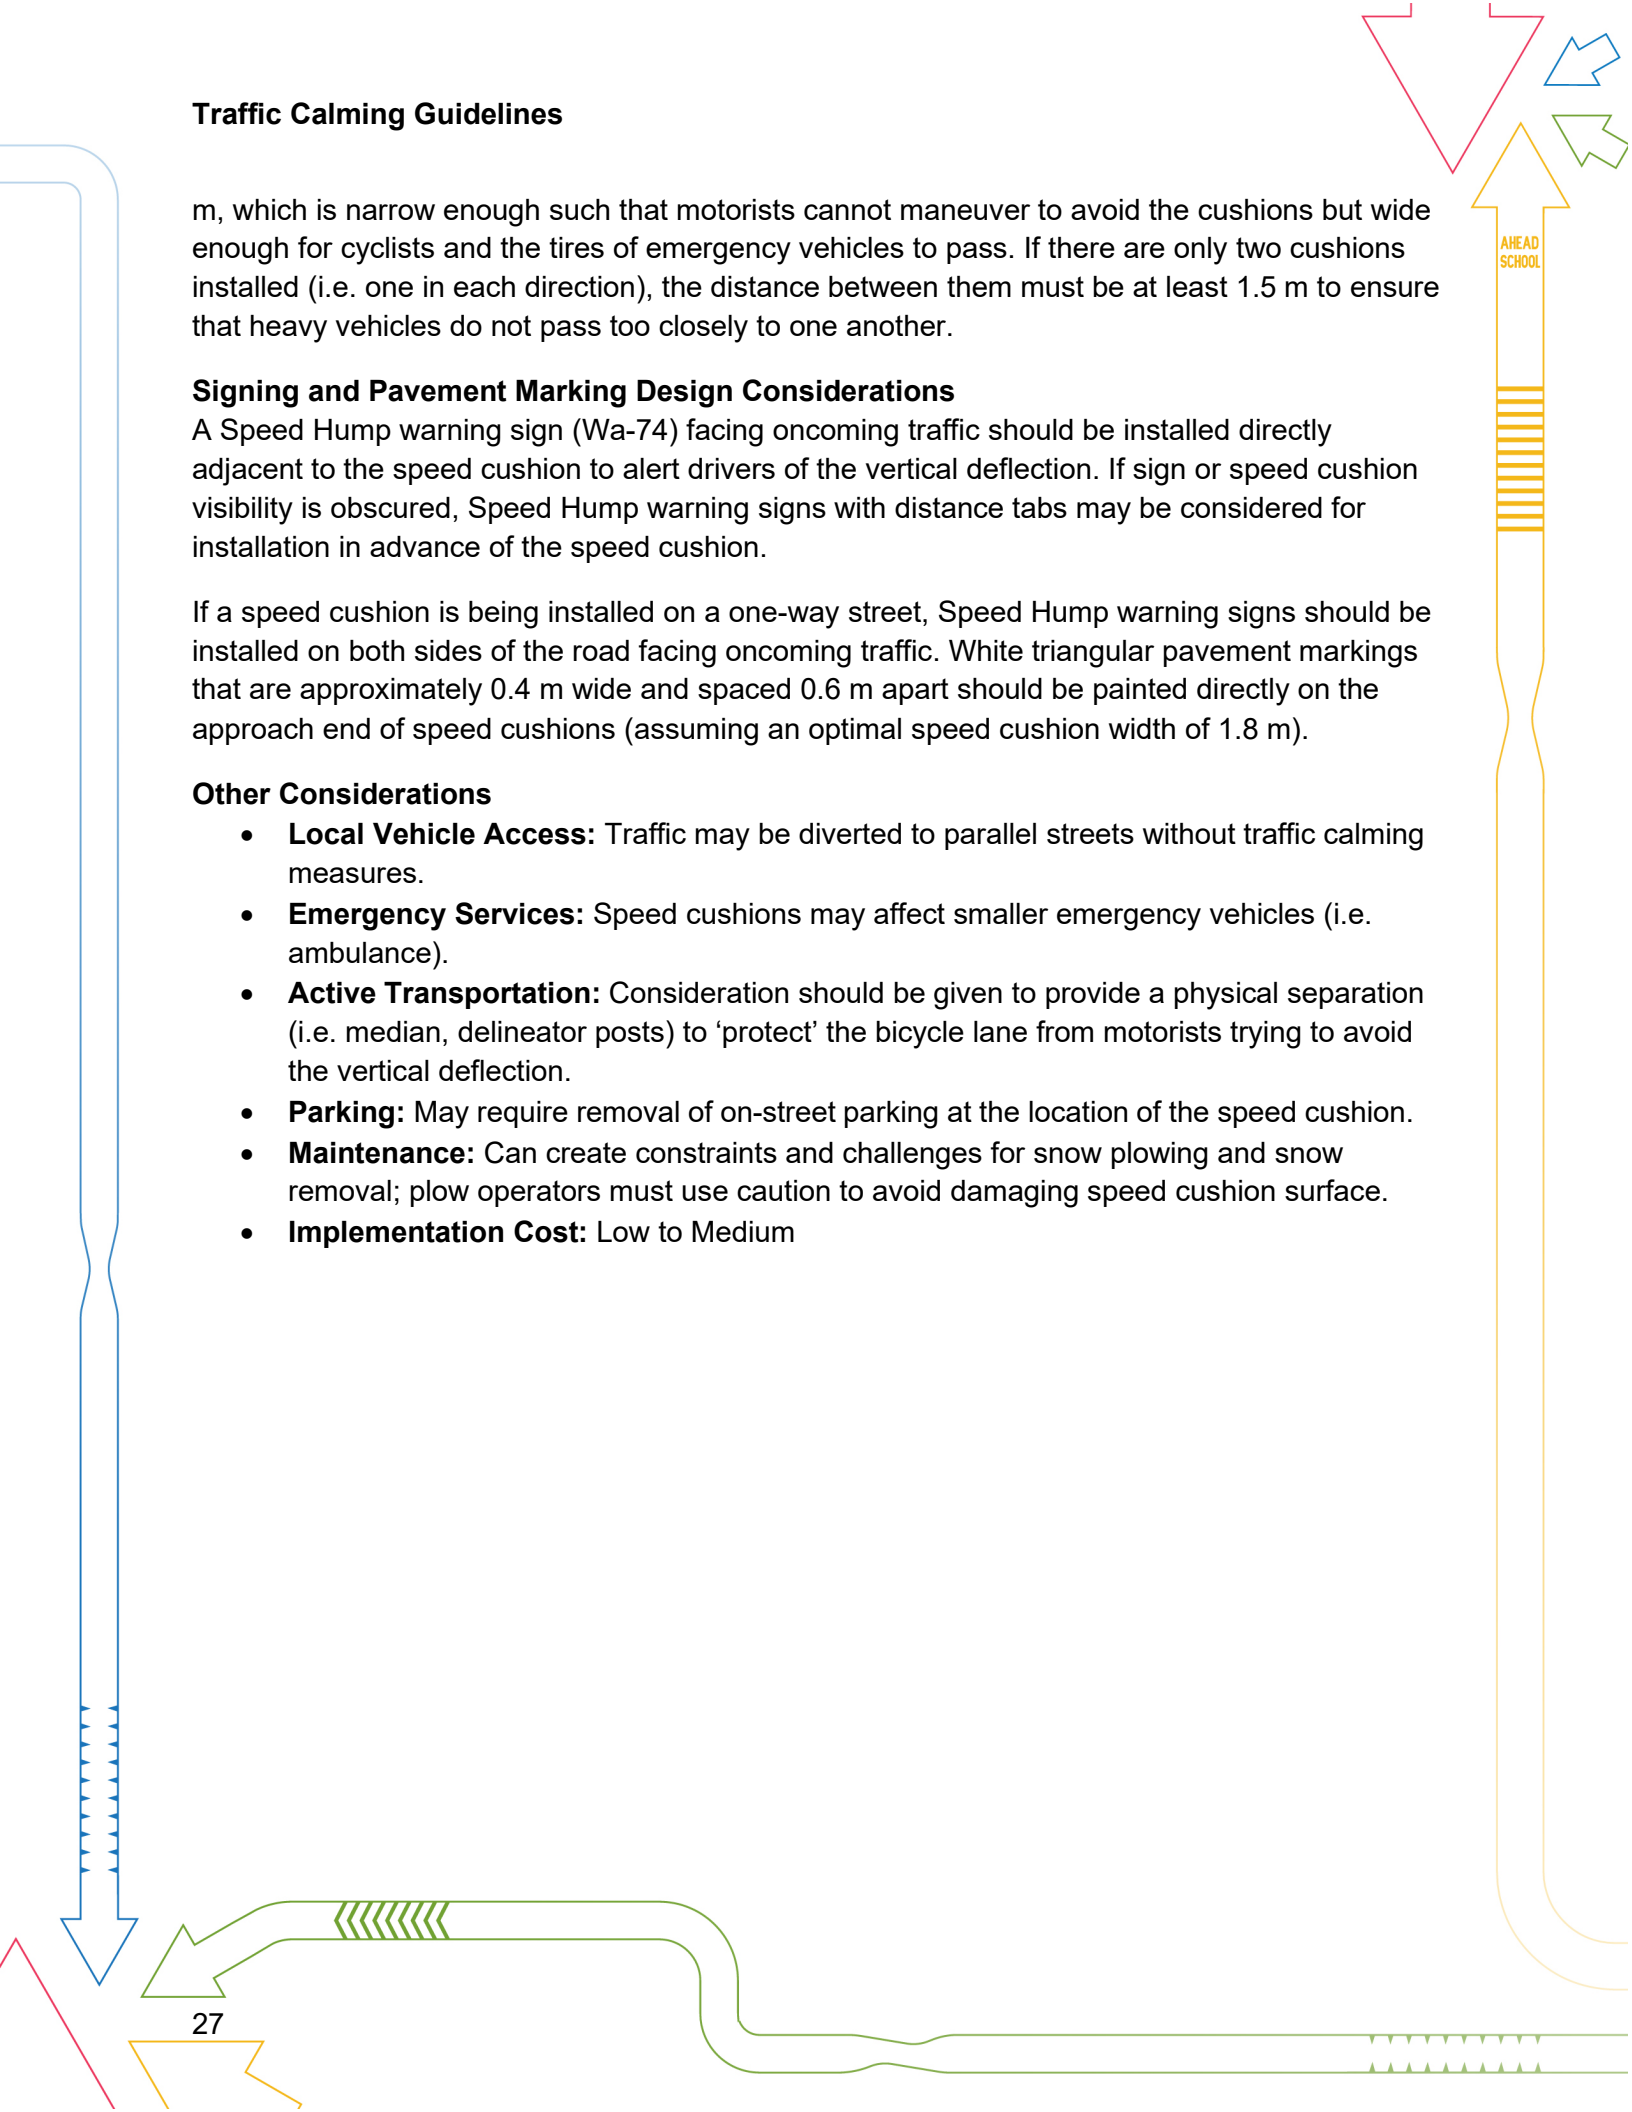

### Type II (Engineered-based) Measures: Intersection Treatments

#### Textured Crosswalk

##### Description


Textured crosswalks may have a different colour and/or surface texture than the roadway to highlight the pedestrian crossing area. Marking products may include traditional pavement marking paint or more durable applications such as thermoplastic or cold plastic. The conspicuity of the colour and texture reduces over time as they wear out, but the use of more durable applications can retain good visibility for relatively long periods of time, reducing maintenance costs.

##### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban
- **ADT:** All traffic volumes (with consideration of buses and heavy vehicles on truck routes)
- **Cross-Section:** N/A
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:** N/A

##### Potential Benefits

- **Speed Reduction:** Degree of speed reduction is dependent on the use of other traffic calming measures along the roadway (minimal demonstrated effect if used alone).

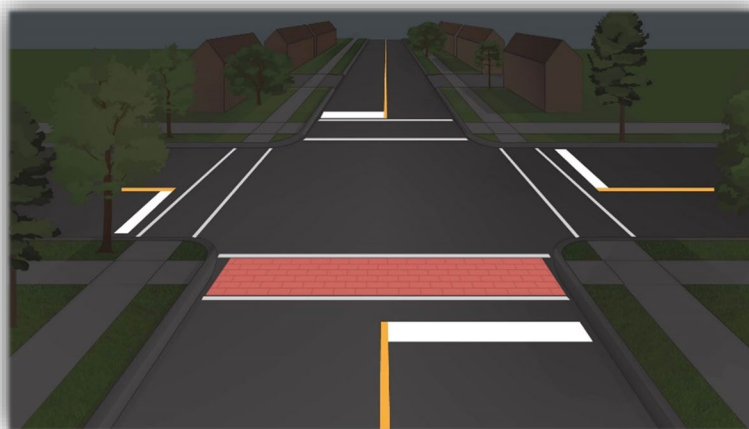

##### Design Considerations<sup>17</sup>

The crosswalk must be at least 2.5 m wide, but widths of 3 m to 4 m are considered typical in urban areas with higher levels of pedestrian activity. If the measure is installed at a controlled crossing, 0.1 m to 0.2 m wide parallel standard crosswalk lines are required to delineate the outside edges of the crosswalk. Additionally, if zebra crosswalk markings are used, the typical configuration consists of block markings that are 0.6 m wide and spaced at 0.6 m.


##### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Emergency Services:** No significant impact on emergency service response times.

<sup>17</sup> Ontario Traffic Manual Book 15 – Pedestrian Crossing Treatments, Ministry of Transportation of Ontario, June 2016.

## Traffic Calming Guidelines

- **Active Transportation:**
  - Extension of sidewalk and textured surface treatment emphasizes pedestrian priority and may reduce pedestrian-vehicle conflicts
  - May result in a false sense of pedestrian security if not accompanied by pedestrian right-of-way legislation
  - Textured surfaces may create traction and/or stability issues for persons with mobility challenges
- **Parking:** Removal of on-street parking is not required.
- **Maintenance:**
  - Ongoing road maintenance is required to repair uneven transition between surfaces because asphalt and textured pavement settles differently
  - Textured surfaces may increase street sweeping time if the texturing involves deep grooves, and excess dust/debris may remain in the grooves
  - Less effective during the winter season due to snow/ice cover.
- **Streetscaping:**
  - May create extra traffic noise from vehicle wheels travelling over the textured surface (i.e. if texturing is rough or pronounced)
  - Textured treatment enhances the appearance of a street, especially when combined with other landscaping techniques.
- **Implementation Cost:** Low to Medium

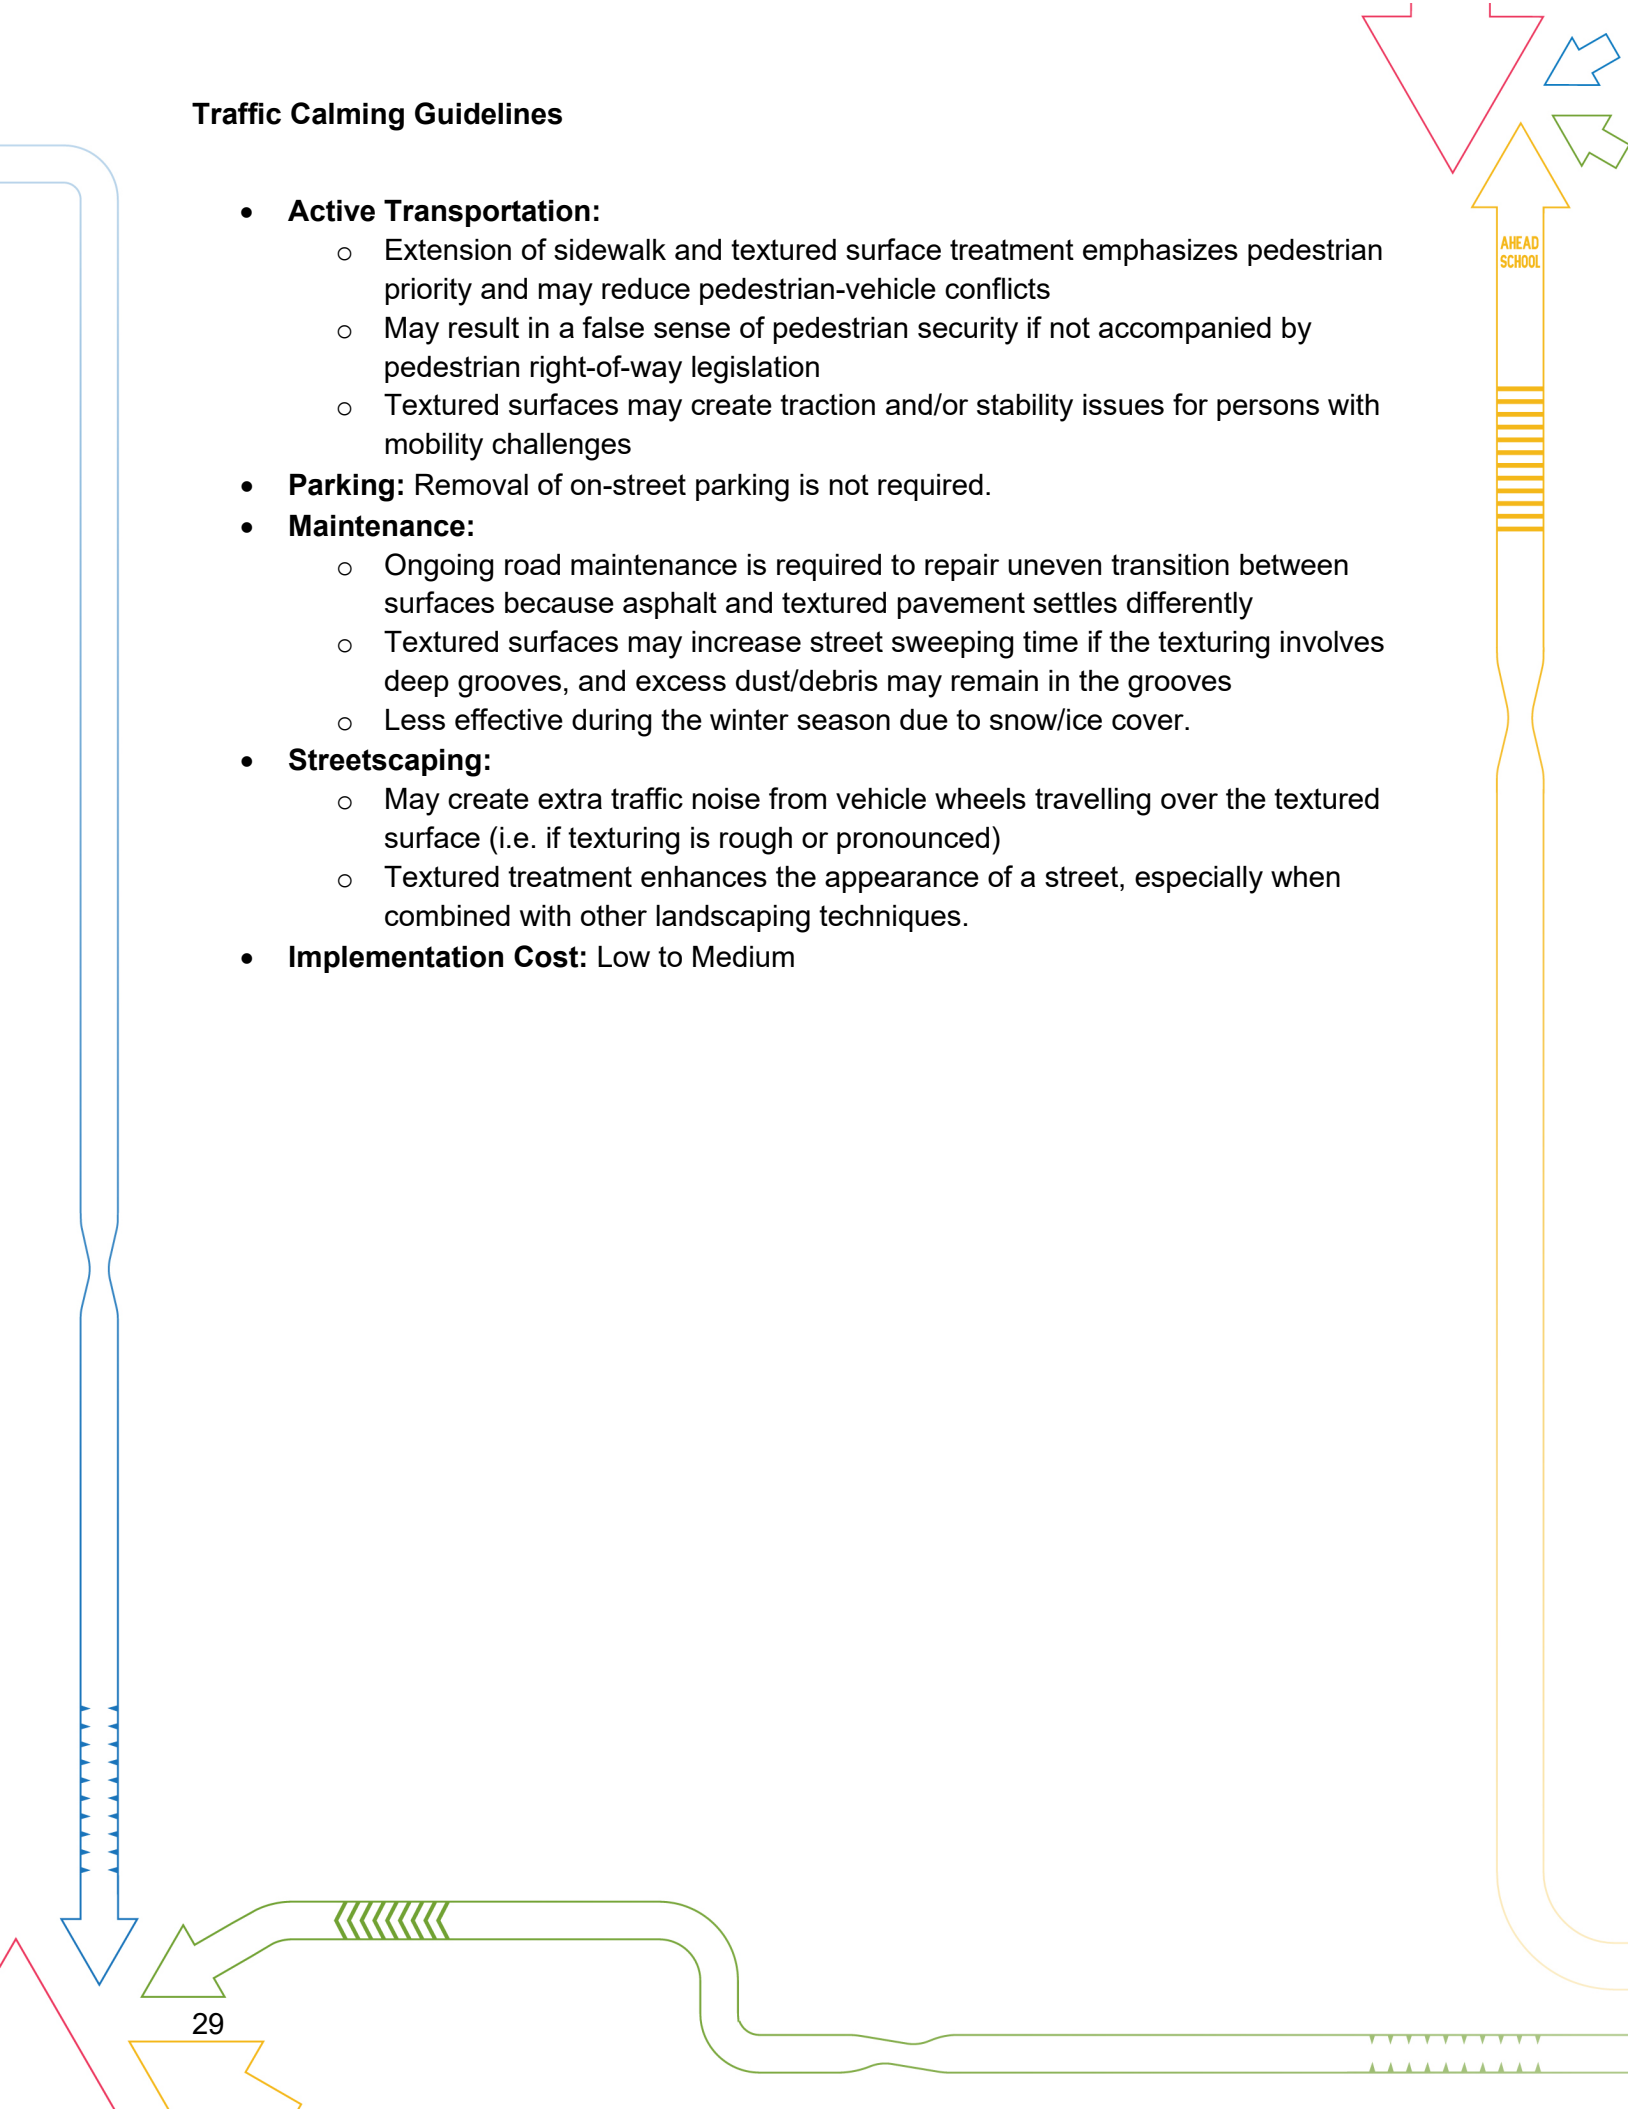



## Traffic Calming Guidelines

### Type II: Raised Crosswalks

#### Description

A raised crosswalk is a marked pedestrian crosswalk at an intersection or mid-block location constructed at a higher elevation than the adjacent roadway. Raised crosswalks may help reduce vehicle speeds and improve pedestrian visibility, thereby reducing pedestrian-vehicle conflicts.

Raised crosswalks are similar to speed humps, except they are typically wider and have a flat top. The elevation and width of the raised crosswalk matches the sidewalk approaches on either side of the roadway. These measures are suitable for all types of crosswalks (unsignalized, midblock, and intersection).

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:**
  - Designated emergency access routes
  - Small turning radius curves and other areas with limited sight distance
  - Driveways
  - Transit routes where articulated buses are used due to potential decoupling
  - Bus stops



#### Potential Benefits

- **Speed Reduction:** Degree of speed reduction is dependent on the use of other traffic calming measures along the roadway (minimal demonstrated effect if used alone).

#### Geometric Design Considerations<sup>18</sup>

A raised crosswalk is typically 6.5 m wide, 80 mm high, has a minimum crosswalk width of 2.5 m, and has a curb-face height of 15 mm at the location of the measure. However, to achieve a curb-face height of 15 mm, sidewalk reconstruction adjacent to the curb may be required. The transition zone between each end of the raised crosswalk and the flat top of the crosswalk must be a minimum of 1.5 m long, but it is desirable to be at least 2.0 m. The maximum slope of this transition zone on both ends of the raised crosswalk is 6%. The vertical transition that is

<sup>18</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

required at each end of a raised crosswalk should be keyed into the existing pavement to minimize any damage to, and by, snow plowing equipment.

Catch basins are required on the uphill side of a raised crosswalk.

### Signing and Pavement Marking Design Considerations<sup>19</sup>

A Speed Hump warning sign (Wa-74) facing oncoming traffic should be installed directly adjacent to the raised crosswalk to alert drivers of the vertical deflection. If the visibility of the sign or raised crosswalk is obscured, Speed Hump warning signs with distance tabs may be considered for installation in advance of the raised crosswalk.

Pedestrian Crossover signs (Ra-4) must be installed on both sides of the roadway facing traffic if the raised crosswalk is being installed at a location without traffic signal control or Stop control.

If a raised crosswalk is being installed on a one-way street, Speed Hump warning signs should be installed on both sides of the road facing oncoming traffic. White triangular pavement markings that are approximately 0.6 m wide and spaced 1.5 m apart should be painted directly on the approach end of raised crosswalks.

### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Emergency Services:** Raised crosswalks may have an effect on emergency service response times.
- **Active Transportation:** Pedestrian crossing area is better defined, and vehicles are forced to slow down through the pedestrian conflict zone, which may reduce pedestrian-vehicle conflicts.
- **Parking:** Removal of on-street parking is not required.
- **Transit:** It is recommended not to place these measures along routes where articulated buses are operating. It is also recommended to consider the design and proximity of raised crosswalks relative to proximity of bus stops.
- **Maintenance:**
  - Snow clearing time may be increased
  - Consideration of existing drainage elements such as catch basins, concrete channels, gutters, inlets, and trench drains
- **Streetscaping:**
  - Aesthetic benefits if raised crosswalk incorporates pavement treatments such as coloured and/or textured pavement
- **Implementation Cost:** Low to Medium

<sup>19</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines


### Type II: Intersection Treatments – Raised Intersection

#### Description

Raised intersections have a flat, elevated area between all approaching roadways of an intersection, similar to raised crosswalks and speed tables. However, the reduction in vehicle speeds is minor compared to raised crosswalks, speed humps, and speed tables due to the relatively large distance between access and egress ramps. Raised intersections alert drivers of pedestrians crossing through intersections.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** 2 lanes (one each direction) but can be used on one-way streets
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:** Designated emergency access routes.

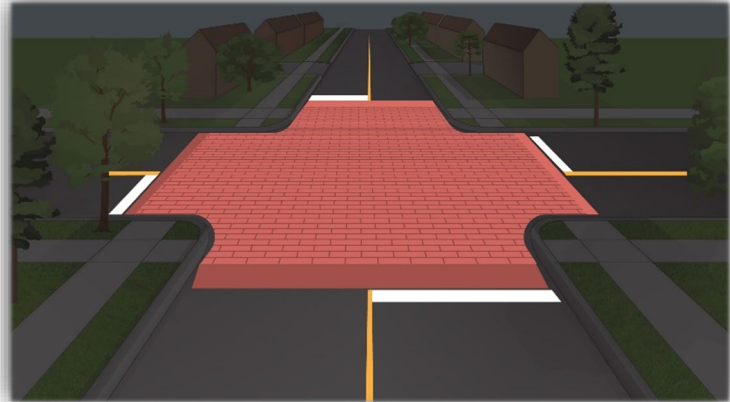

#### Potential Benefits

- **Speed Reduction:** Speed reduction of up to 10 km/h can be achieved.
- **Volume Reduction:** Amount of traffic diversion is dependent on the number of measures along the roadway.
  - Traffic may be diverted to parallel streets without traffic calming measures.

#### Geometric Design Considerations<sup>20</sup>

A raised intersection is typically 80 mm high, has a minimum crosswalk width of 2.5 m, and has a curb-face height of 15 mm at the location of the measure. However, to achieve a curb-face height of 15 mm, sidewalk reconstruction adjacent to the curb may be required. The transition zone between each edge of the raised intersection and the flat top of the crosswalk is typically 2.0 m long. The sloping surfaces connecting adjacent sidewalks to those across the raised intersection should have a tactile finish and a slope no greater than 6%. The vertical transition that is required at each edge of a raised intersection should be keyed into the existing pavement to minimize any damage to, and by, snow plowing equipment.

<sup>20</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

A minimum pavement slope of 1% should be provided within the raised intersection to facilitate surface drainage.

### Signing and Pavement Marking Design Considerations<sup>21</sup>

A Speed Hump warning sign (Wa-74) facing oncoming traffic should be installed directly adjacent to the raised intersection to alert drivers of the vertical deflection. If sign or raised intersection visibility is obscured, Speed Hump warning signs with distance tabs may be considered for installation in advance of the raised crosswalk.

White triangular pavement markings that are approximately 0.6 m wide and spaced 1.5 m apart should be painted directly on the approach end of raised intersections.

### Other Considerations

- **Local Vehicle Access:** Traffic may be diverted to parallel streets without traffic calming measures.
- **Emergency Services:** Raised intersections may have an effect on emergency service response times.
- **Active Transportation:** Pedestrian crossing area is better defined, and vehicles are forced to slow down through the pedestrian conflict zone, which may reduce pedestrian-vehicle conflicts.
- **Parking:** Removal of on-street parking is not required.
- **Maintenance:**
  - Snow clearing time may be increased
  - Attention needed to avoid need for relocation of drainage elements such as catch basins, concrete channels, gutters, inlets, and trench drains.
- **Streetscaping:**
  - Aesthetic benefits if raised intersection incorporates pavement treatments such as coloured and/or textured pavement
- **Implementation Cost:** Medium to High

<sup>21</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

### Type II: Intersection Treatments – Curb Radius Reduction

#### Description

A curb radius reduction is a reconstruction of an intersection corner with a smaller radius, generally between 3 and 5 m. A smaller corner radius requires vehicles to slow their speed to make a right turn but may make right turns difficult for larger vehicles. In addition, they reduce the distance pedestrians must walk from curb to curb in a crosswalk. A curb radius reduction can be implemented as a measure on local roads using pinned curbs.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** Use with caution on major roads > 10,000 vehicles per day
- **Cross-Section:** N/A
- **Grade:** ≤ 8%
- **Locations to Avoid:**
  - Intersections with designated truck routes and/or high volumes of large vehicles making turning movements.
  - Primary emergency vehicle routes.



#### Potential Benefits

- **Speed Reduction:** Speed reduction for right-turning vehicles.

#### Geometric Design Considerations<sup>22</sup>

A curb radius reduction should aim to introduce the smallest radius required to accommodate a passenger vehicle, which typically ranges from 3.0 m to 5.0 m. Afterwards, it is important to check any potential implications of this radius on the operation of larger vehicles. The width of a roadway at the location of a curb radius reduction is recommended to be a minimum of 6.0 m.

#### Signing and Pavement Marking Design Considerations<sup>22</sup>

If a curb radius reduction is used as an independent traffic calming measure, no additional signing or pavement markings are required. However, if combined with curb extensions, the installation of Object Markers (Wa-33) may be considered if the visibility of curb extensions is obscured. Object Markers should be installed in areas with heavy snowfall at the leading edge of each curb extension and at locations where there may be any concern regarding the sudden


<sup>22</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

introduction of a curb extension into the roadway. Consideration can also be given to providing bollards with reflective striping as an alternative to Object Markers in some municipalities.

### Other Considerations

- **Local Vehicle Access:**
  - Implementation of this type of traffic calming measure does not affect local traffic access
  - Large vehicles such as long trucks and busses may need to cross into adjacent (potentially oncoming) travel lanes to complete turns at intersections with radius reduction
- **Emergency Services:** Curb radius reductions may have an effect on emergency service response times if insufficient road width is available for turning radius needs.
- **Transit:** Implementation should consider transit routes (volume of buses and movements at the intersection). Consultation is recommended for areas of implementation along transit routes.
- **Active Transportation:**
  - Reduces pedestrian crossing distance / improves visibility of oncoming traffic, which may reduce pedestrian-vehicle conflicts
  - Large vehicles which may need to mount the curb when turning may conflict with pedestrians. This is dependent on selecting the design vehicle for the radius alignment. Consideration should be given to the design of appropriate pedestrian refuge and crossing areas.
- **Parking:** Removal of on-street parking is not required
- **Maintenance:**
  - Can create constraints for snow plowing and snow removal. Consultation is recommended for areas of implementation.
  - Requires consideration for presence of drainage elements such as catch basins, concrete channels, gutters, inlets, and trench drains.
- **Implementation Cost:** Low to Medium

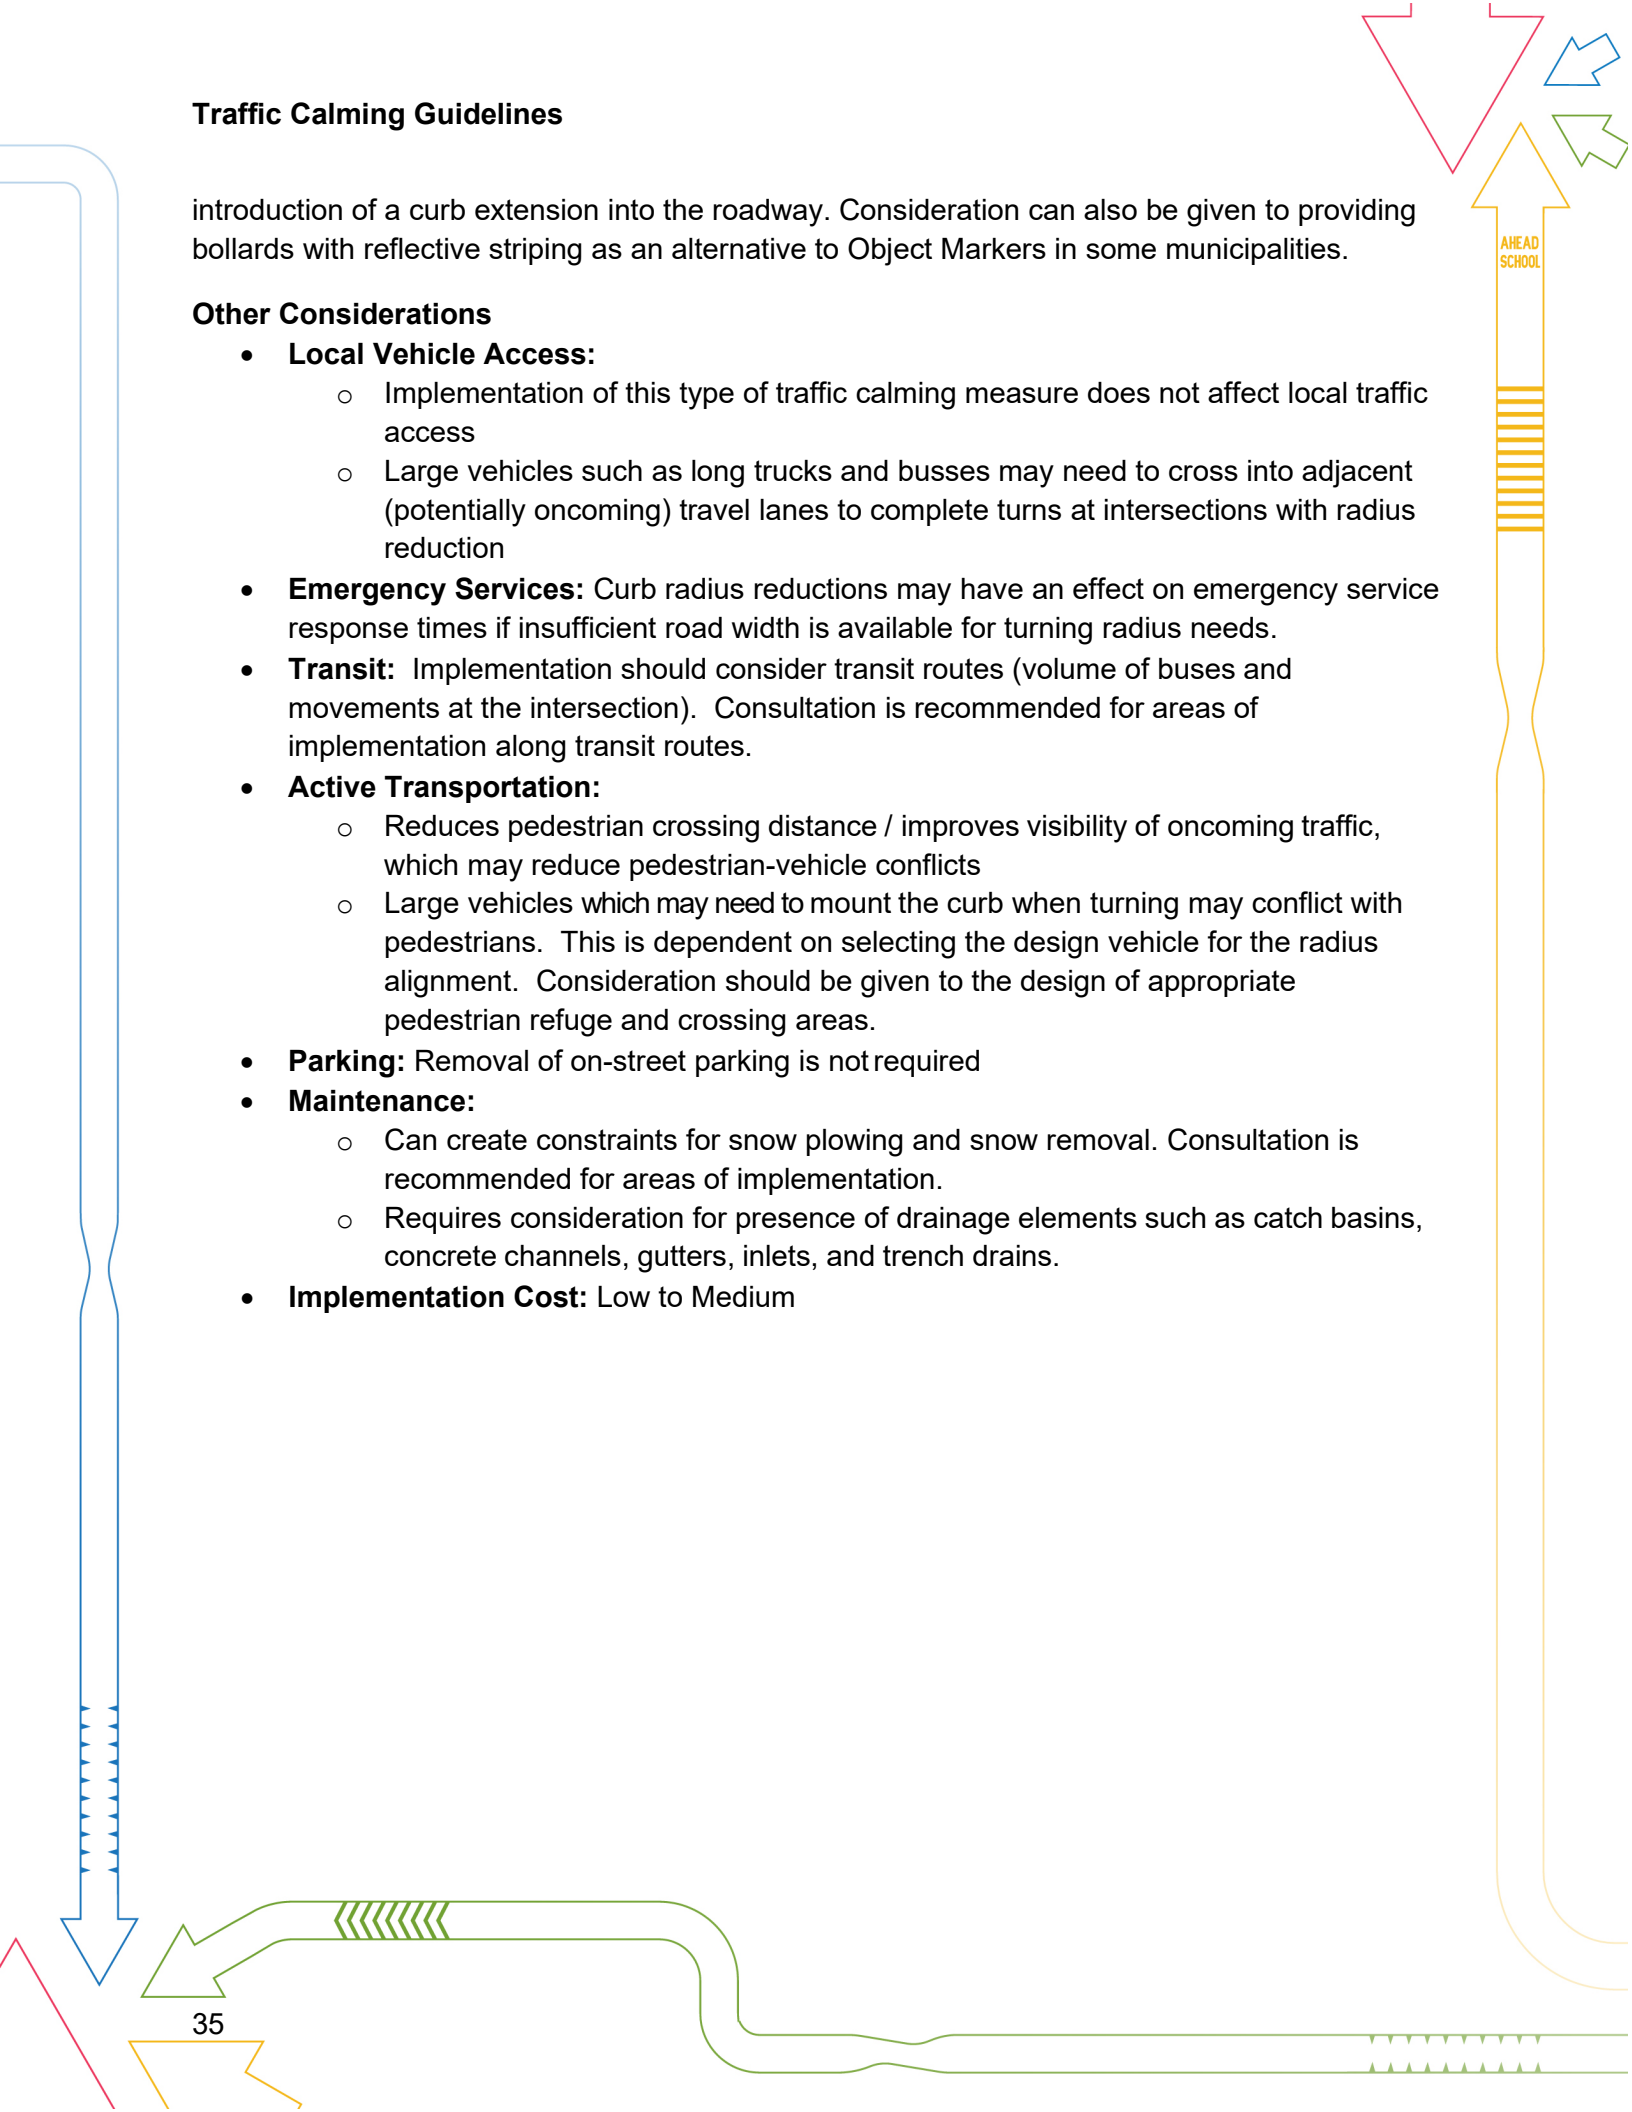

## Traffic Calming Guidelines


### Type II: Intersection Treatments – Right-In/Right-Out Islands, Intersection Channelization, and Raised Medians through Intersections

#### Description

Right-In/Right-Out Islands, Intersection Channelization, and Raised Medians through Intersections are vertical barriers obstructing and/or restricting specific vehicular movements at intersections, while preserving all or most of the original roadway configuration.

#### Applicability

- **Road Type:** Local Roads
- **Environment:** Urban
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Grade:** N/A
- **Locations to Avoid:**
  - Transit routes
  - Designated emergency routes (applicable for intersection channelization only)

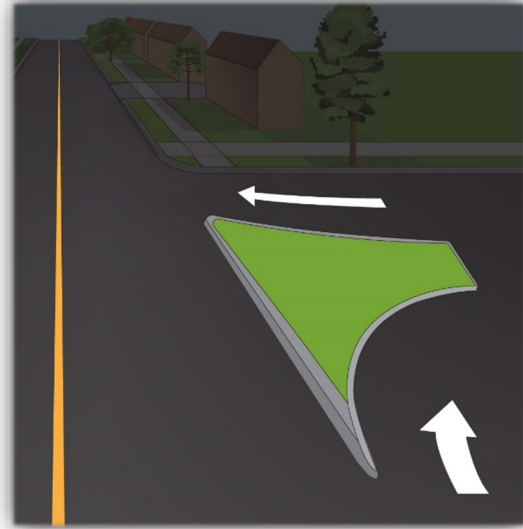

#### Potential Benefits

- **Speed Reduction:** Minimal demonstrated effect on speed reduction if the treatment is implemented by itself.
- **Volume Reduction:** Expected reduction of traffic volumes is proportional to the directional movement to be prohibited.

#### Geometric Design Considerations: Right In/Right Out Islands<sup>23</sup>

The intersection radii should be chosen such that a divisional island large enough to effectively discourage through and left-turn movements can be implemented. A minimum island size of 6.0 m<sup>2</sup> to 10 m<sup>2</sup> is required for pedestrian refuge. It is also important to carefully select a curb radius between the two street edges that maximizes the island length along the unobstructed street, further discouraging through traffic on the obstructed street. Consideration is also required for the creation of right turn 'channelizations' and the alignment of vehicles relative to potential crossings of pedestrians and cyclists to ensure that channelizations do not create instances where vehicles increase speed making their movements at the corner. The location of depressed curbs and signs should consider the movement of larger/design vehicles.

#### Geometric Design Considerations: Intersection Channelization<sup>24</sup>

<sup>23</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

<sup>24</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

The right-turn radius into the protected street segment should be chosen such that a divisional island large enough to effectively discourage left-turn and through movements can be implemented. A minimum island size of 6.0 m<sup>2</sup> to 10 m<sup>2</sup> is required for pedestrian refuge. Consideration is also required for the creation of right turn 'channelizations' and the alignment of vehicles relative to potential crossings of pedestrians and cyclists to ensure that channelizations do not create instances where vehicles increase speed making their movements at the corner.

The width of the turning lane should be designed to accommodate only those vehicles that need to use the street segment on a regular basis. Implications of infrequent access by larger vehicles should be reviewed as well. The use of depressed curbs could help assist with both of these considerations.

The effectiveness of channelization in discouraging motorists from making an illegal turn is improved if an island size of 10 m<sup>2</sup> or greater is used.

### Geometric Design Considerations: Raised Medians through Intersection<sup>25</sup>

The median island should be wide enough to provide pedestrian refuge (i.e. 6.0 m<sup>2</sup> to 10 m<sup>2</sup>). Additionally, the sidewalk crossings of the raised median through intersection should include a depressed section to facilitate pedestrian crossings. This depressed section should be narrow enough to deter general use, but still be able to accommodate emergency access if needed. Separate openings with a minimum 1.5 m width may also be considered for cyclists.

The raised median is recommended to have a minimum 1.5 m raised portion and provide at least a 3.5 m single lane width on each side of the median beyond the intersection. However, turning vehicle requirements will determine the actual lane width adjacent to the median. The median is also recommended to extend 5.0 m to 7.0 m beyond the outer edge of the crosswalk, depending on driveway locations, to discourage shortcutting.

### Signing and Pavement Marking Design Considerations: Right In/Right Out Islands<sup>26</sup>

On the protected intersection approach, a Right Turn Only sign (Rb-42) is required in advance of the intersection and on the right-in/right-out island. On the end of the island facing this same approach, a Keep Right sign (Rb-25) and an Object Marker (Wa-33L) are also required. An Object Marker (Wa-33) is also required on the end of the island facing traffic turning right onto the protected street.

A Do Not Enter sign (Rb-19) is required on the island facing the prohibited through movement. A No Left Turn sign (Rb-12) should be installed on the cross-street on the far side of the intersection and at the end of the island. Both signs should be facing the traffic that is prohibited to turn left.

<sup>25</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

<sup>26</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.



## Traffic Calming Guidelines

On the intersection approach facing the island (i.e. intersection leg opposite to the protected approach), a Left or Right Turn Only sign (Rb-45) is required to inform drivers that they must turn onto the cross street.

Pavement marking arrows may be used to supplement the Rb-42 and Rb-45 signs. Additional signage may be required for pedestrian and/or cyclist crossings.

### Signing and Pavement Marking Design Considerations: Intersection Channelization<sup>27</sup>

A Do Not Enter sign (Rb-19) is required on the island facing the prohibited through movement and a Left or Right Turn Only sign (Rb-45) should be installed as well on this approach to inform drivers that they must turn onto the cross street.

A No Left Turn sign (Rb-12) should be installed on the cross-street on the far side of the intersection and at the end of the island. Both signs should be facing the traffic that is prohibited to turn left.

A Keep Right sign (Rb-25) and Object Marker (Wa-33L) should be installed on the end of the island that is in the centre of the protected street. An Object Marker (Wa-33) is also required on the corner of this island facing traffic turning right from the collector street.

Pavement markings may be added to supplement the Eb-45 sign. Additional signage may be required for pedestrian and/or cyclist crossings.

### Signing and Pavement Marking Design Considerations: Raised Medians through Intersection<sup>28</sup>

The two ends of the raised median should have Keep Right signs (Rb-25) and Object Markers (Wa-33L) installed. Depending on driver behaviour, No U-Turns signs (Rb-16) may also be required and should be installed back-to-back to the Keep Right signs (Rb-25). At the centre of the protected cross-street, installation of either a Right Turn Only sign (Rb-42) or a One-Way Sign (Rb-21) is required on the median facing both approaches.

Pavement markings on both approaches to the raised median are illustrated in the MUTCDC.

### Other Considerations

- **Local Vehicle Access:** Vehicular traffic will be rerouted to adjacent locations, with the consequence of increased trip length for some residents.
- **Emergency Services:** Consultation with emergency services should be conducted in advance of implementation of these measures.
- **Active Transportation:** The alignment of vehicle movements being directed to make right turn movements needs to be considered with the potential for pedestrian and/or cyclist facilities crossing at a channelization to ensure that the channelization does not


<sup>27</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

<sup>28</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

contribute to faster vehicle movements around the turn or introduce sightline challenges for visibility of any off-road facility crossings.

- **Parking:** Removal of on-street parking is not required.
- **Maintenance:** Winter maintenance and garbage collection routes may be subject to change based on the location of the measure.
- **Streetscaping:** Potential opportunities for streetscaping as part of the measure, but sightlines need to be considered for any proposed landscaping elements.
- **Implementation Cost:** Medium

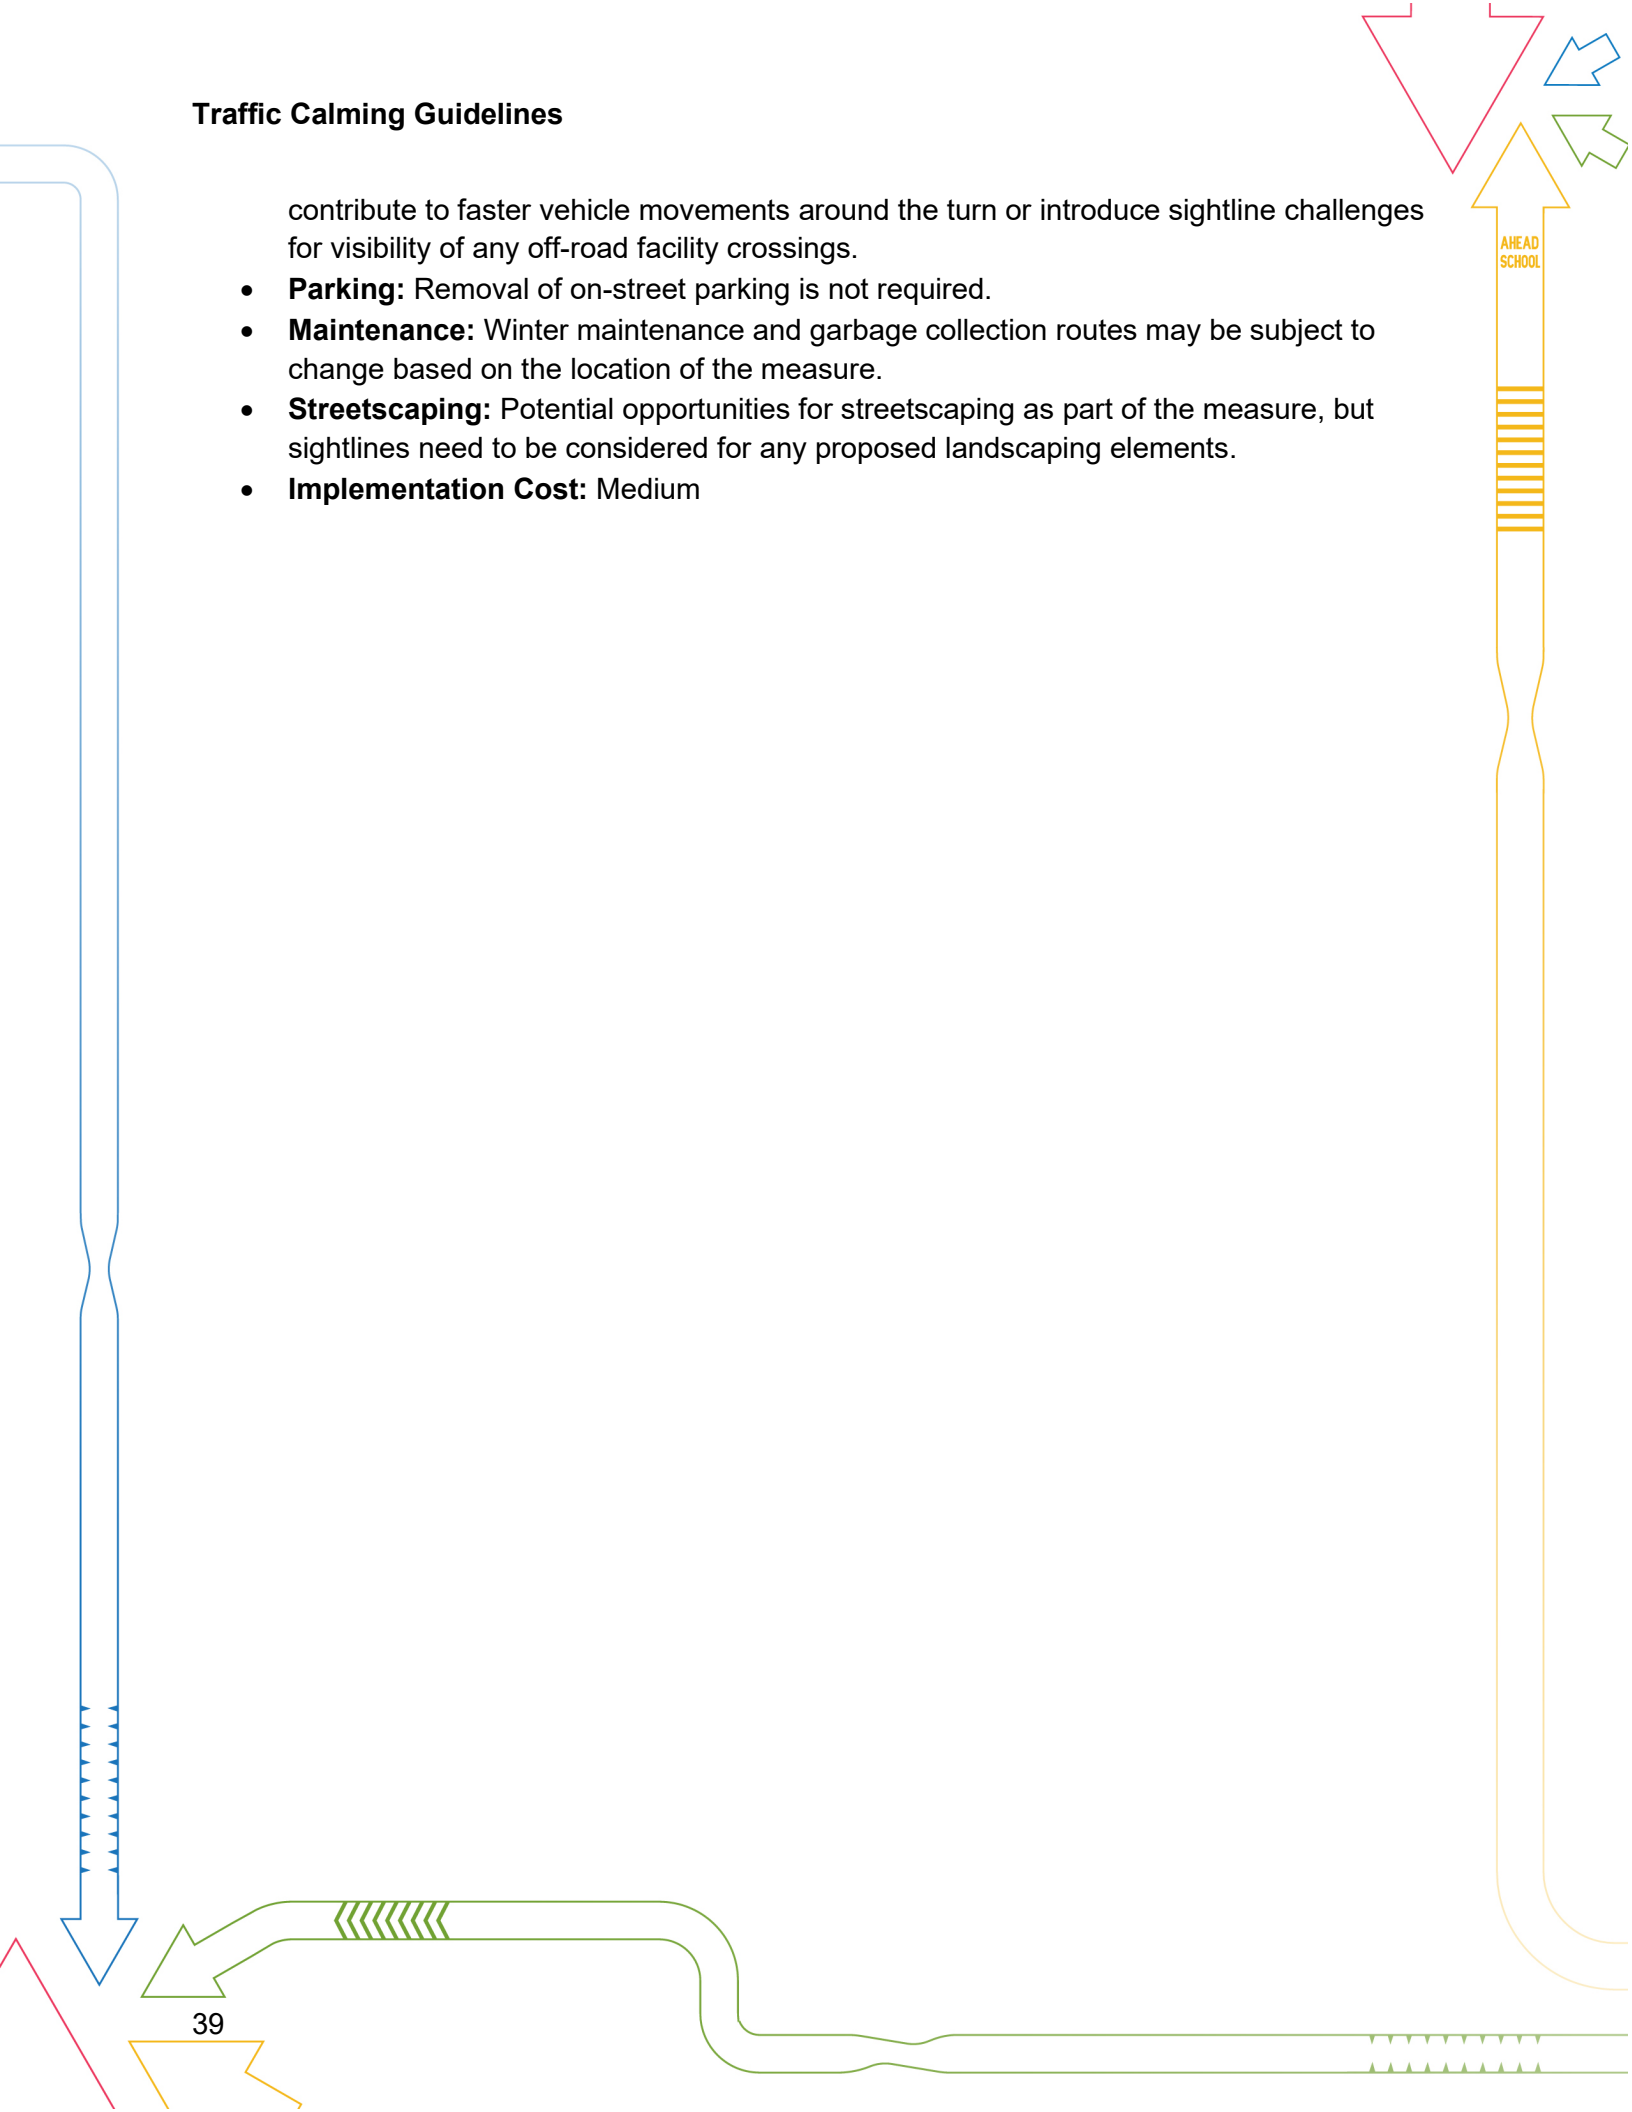


## Traffic Calming Guidelines

### Type II: Intersection Treatments – Vehicular Directional Closures and Diverters

#### Description

A directional closure is vertical barrier obstructing and/or prohibiting one direction of traffic. Usually located at the intersection of a local road with collector or arterial streets, the purpose of this measure is to eliminate an identified (or potential) infiltration of traffic along a specific corridor. A diverter differs from a directional closure in its position through the entire length of an intersection.

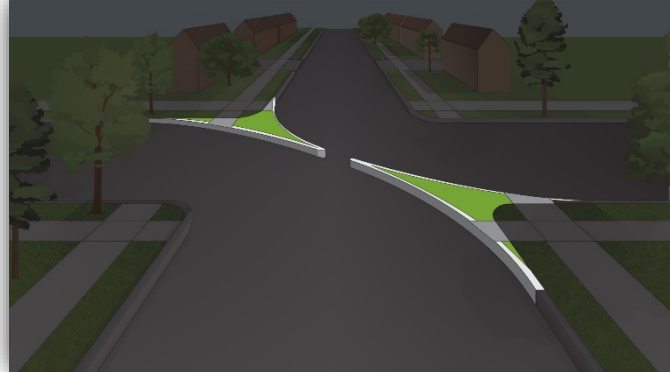

#### Applicability

- **Road Type:** Local Roads
- **Environment:** Urban
- **ADT:** < 1500 vehicles per day
- **Cross-Section:** Most effective on 2 lane roadways (one each direction)
- **Grade:** N/A
- **Locations to Avoid:**
  - Local street intersections with other local streets because this will shift any traffic volume issues to other local streets instead of the arterial system (applicable for directional closures only)
  - Designated emergency routes (applicable for diverters only)

#### Potential Benefits

- **Volume Reduction:** Expected reduction of traffic volumes is proportional to the directional movement to be prohibited.

#### Geometric Design Considerations: Vehicular Directional Closures<sup>29</sup>

The width of directional closure islands must be such that they effectively obstruct (prohibit) one direction of traffic and extend to approximately the centreline of a roadway. The length of these islands typically ranges from 5.0 m to 7.0 m but vary based on local conditions.

Gaps bordered by rolled curbs are commonly provided adjacent to the closures to accommodate cyclists through the intersection. These gaps are approximately 1.5 m in width to provide enough space for cyclists to maneuver but not enough space for motor vehicles.

#### Geometric Design Considerations: Diverters<sup>30</sup>

The alignment of the diverter must provide an adequate turning path for all vehicles. Parking should be prohibited within the limits of the diversion to allow for the minimum diversion width

<sup>29</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

<sup>30</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

that maximizes the possible landscape area between the two diversions within the original intersection. The minimum width of the central diverter island should be 1.5 m and the maximum width of an adjacent roadway to a diverter is 7.5 m.

Bicycle channels bordered by rolled curbs are typically provided through the diverter at a width of 1.5 m to accommodate the movement of cyclists. If bicycle channels are provided, these should have bollards or planters installed immediately adjacent to the edge of each channel (typically installed at 1.5 m spacing) to deter usage by general traffic. Additionally, if a sidewalk is placed along the diverter, this requirement for landscaping and/or bollards applies as well. It is important to ensure that any plantings placed on the diverter should not obscure the visibility of motorists and cyclists. Provision of both features will require a central diverter island width greater than the minimum width of 1.5 m stated previously.

To accommodate emergency vehicles at diverters, break-away or lockable bollards or lockable gates can be considered.

### Signing and Pavement Marking Design Considerations: Vehicular Directional Closures<sup>31</sup>

If the closure is “exit-only”, Left or Right Turn Only signs (Rb-45) and Do Not Enter signs (Rb-19) are required to inform approaching traffic of the closure. If bicycle access is to be permitted, a ‘Bicycles Excepted’ tab sign (Rb-17t) is required. One-Way signs (Rb-21) must also be installed to notify cross-street traffic that turns into the closed street are prohibited. An Object Marker (Wa-33L) must also be installed on the end of the island facing exiting traffic.

If the closure is “entrance-only”, a No Exit sign (Wa-31) informing motorists that existing is not possible and a Checkerboard sign (Wa-8) indicating that the road terminates are required.

Pavement markings may be added to supplement the Rb-45 sign(s).

### Signing and Pavement Marking Design Considerations: Diverters<sup>32</sup>

Sharp Curve signs (Wa-2) should be installed in both directions approaching the diverter to warn motorists of the turning requirement. Additionally, Parking Prohibited signs (Rb-51) are also required within the vicinity of the diversions.

There are no pavement markings specific to this measure.

### Other Considerations

- **Local Vehicle Access:** Vehicular traffic will be rerouted to adjacent locations with the consequence of increased trip length for some residents.
- **Emergency Services:** Consultation with emergency services must be conducted in advance of implementation of the measure.
- **Active Transportation:** No significant impact on active transportation.

<sup>31</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

<sup>32</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

- **Parking:** Removal of on-street parking is not required.
- **Maintenance:** Winter maintenance and garbage collection routes may be subject to change based on the location of the measure.
- **Streetscaping:** Potential opportunities for streetscaping as part of the measure, but sightlines need to be considered for any proposed landscaping.
- **Implementation Cost:** Medium



### Type II (Engineered-based) Measures: Other Cross-sectional Treatments


#### Lane Narrowing

##### Description

Lane narrowing is the reduction of lane width using painted lines that may be supplemented with bollards, raised curbs, or other physical delineations to make the lane feel narrower to motorists. The additional roadway space can be used to add bike lanes, widen sidewalks, or widen the median. The purpose of the narrowed lanes is to reduce vehicle speeds by making drivers feel less comfortable driving at higher speeds. Lane narrowing is less effective if implemented with pavement markings only.

##### Applicability

- **Road Type:** Local, Collector, and Arterial Roads
- **Environment:** Urban
- **ADT:** All traffic volumes
- **Cross-Section:** 2 & 4 lane roadways
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:**
  - Large vehicle accesses (i.e. delivery vehicles)
  - Transit routes.

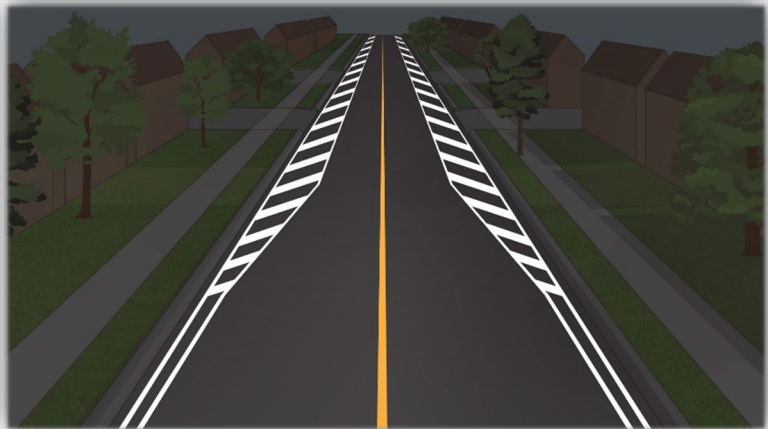

##### Potential Benefits

- **Speed Reduction:** Due to the narrowing effect of this measure, speed reduction of up to 10 km/h can be achieved. Physical lane narrowing tends to provide better results compared to the use of just pavement markings, which are less effective.

##### Design Considerations:<sup>33</sup>

Travel lanes can be narrowed up to a minimum width of 3.0 m.


##### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Emergency Services:** Consideration for larger vehicles along narrow roads.
- **Active Transportation:**

<sup>33</sup> Chiu, M., Clayton, C., Millen, G. et al. 2017. Geometric Design Guide for Canadian Roads: Chapter 6 - Pedestrian Integrated Design. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

- If lanes are physically narrowed and the space is not allocated to other modes, the crossing distance at pedestrian crossings is reduced and may lower pedestrian-vehicle conflicts
- Due to the lane narrowing, cyclists may feel squeezed closer to vehicles if dedicated cycling facilities are not provided
- Opportunities for re-balancing road width to provide more space for dedicated cycling facilities
- Drivers must exert extra caution when passing a cyclist along the roadway.
- Lane narrowing may be considered along arterial roads in specific conditions.
- **Parking:** May require removal of on-street parking at the location of the measure.
- **Maintenance:**
  - Pavement markings require regular maintenance and may be less effective during the winter season due to snow/ice cover.
  - Can create constraints and challenges for snow plowing, snow removal, and snow storage; plow operators must use caution to avoid damaging the physical traffic calming measures (i.e. bollards) if they are not removed during the winter season.
- **Implementation Cost:** Medium to High

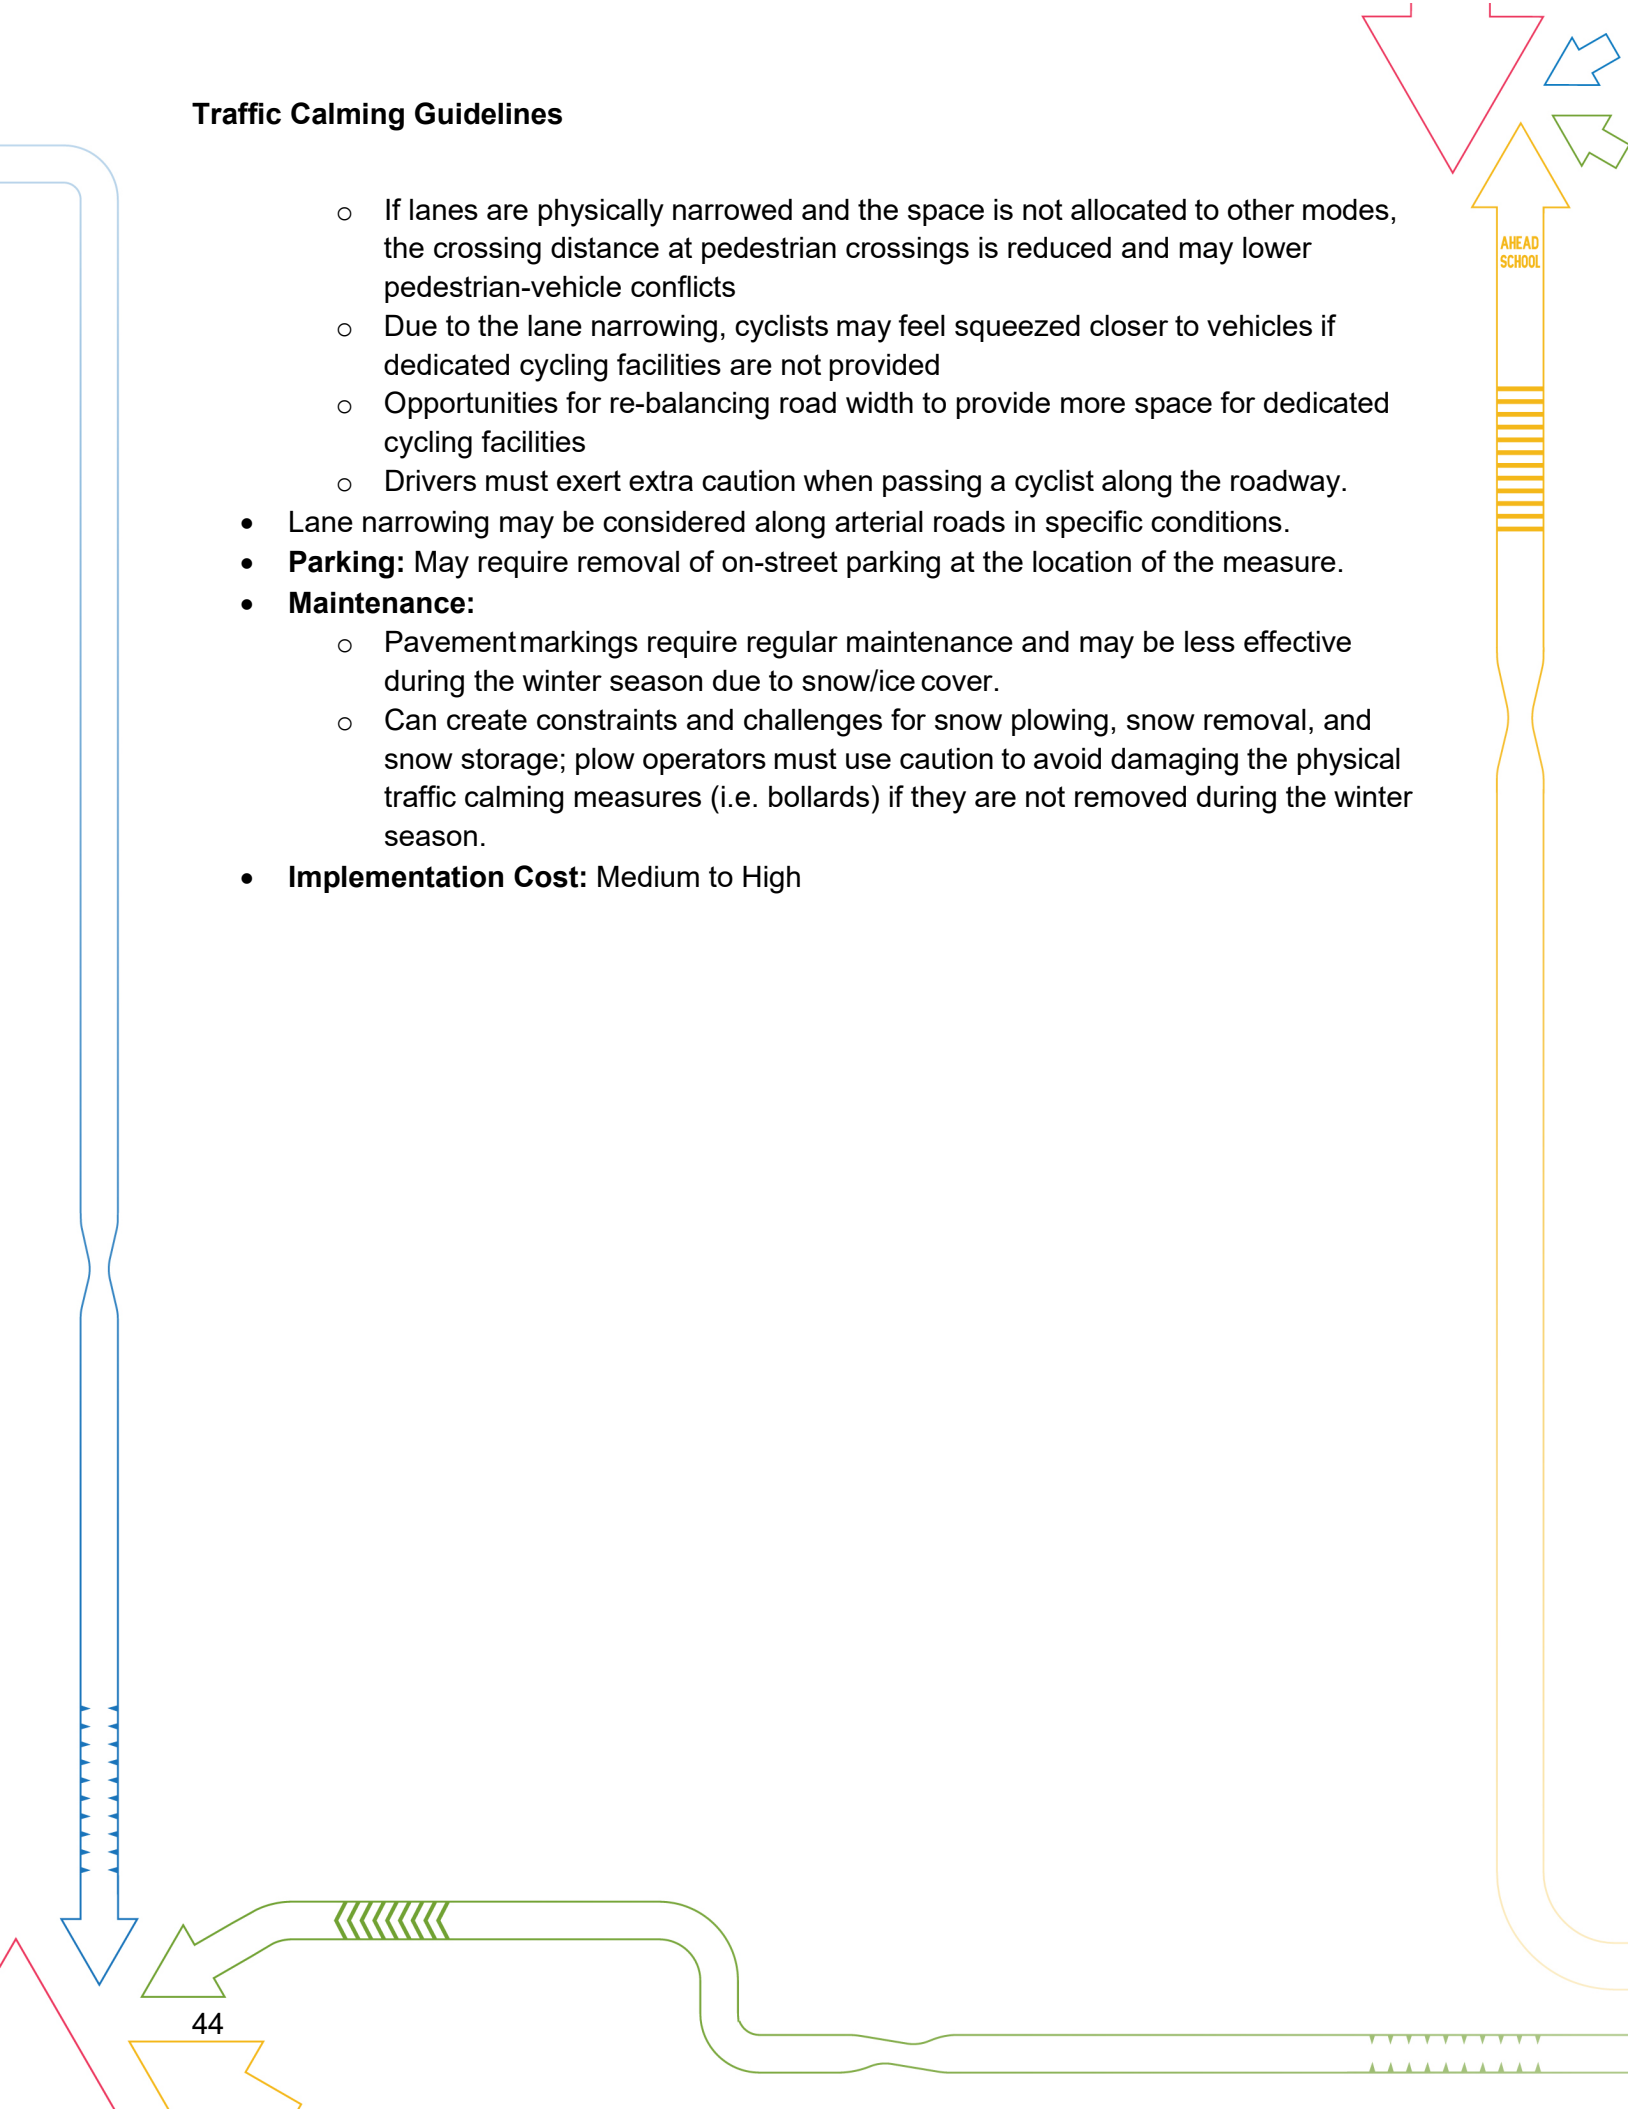

## Traffic Calming Guidelines

### Type II: On-Street Parking

#### Description

On-street parking reduces the effective roadway width by allowing vehicles to park along the curb lane. On-street parking is recommended for local and collector roads with a maximum roadway width of 10 m (assuming a typical parking stall width of 2 m). Vehicle speeds may not be reduced on wider roadways because motorists are less likely to feel constrained by the parked vehicles. Angle parking is not used for this purpose due to the increased potential for conflicts.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban
- **ADT:** All traffic volumes (use with caution on roads > 10,000 vehicles per day)
- **Cross-Section:**
  - Minimum 8.0 m and maximum 10.0 m roadway width recommended for parking on one or both sides of the roadway, respectively
  - Minimum 6.0 m remaining roadway width recommended for through traffic in instances where parking alternates from one-side of the roadway to the other.
- **Grade:** ≤ 8%
- **Locations to Avoid:**
  - Driveways
  - Areas with limited sight distance
  - Bus Zones
  - Designated School Zones
  - Unfenced Playgrounds



#### Potential Benefits

- **Speed Reduction:** Can slow traffic by narrowing the effective roadway space.
- **Volume Reduction:** Possible reduction in short-cutting traffic or through traffic.

#### Geometric Design Considerations<sup>34</sup>

The maximum width for a parking stall is 2.5 m, but a width of 2.0 m is typically used. For a parking scenario where parking alternates from one side of the roadway to the other, a 6.0 m two-lane road width typically applies. For single lane traffic, the lane width can be reduced to 3.5 m.

<sup>34</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.



## Traffic Calming Guidelines

For a parking scenario where parking on both sides of the roadway is permitted, a maximum recommended roadway width of 10 m applies. If parking is to be on one side of the roadway only, a minimum recommended roadway width of 8.0 m applies.

The location of on-street parking stalls must consider site constraints such as driveways and fire hydrants. Additionally, due to the variable size of vehicles utilizing the on-street parking stalls and the risks associated with parking-related maneuvers, on-street parking should not be used as a form of curb extension at, or near, intersections.

### Signing and Pavement Marking Design Considerations<sup>35</sup>

Parking Prohibited signs (Rb-51) should be used to restrict parking in areas of minimum pavement width and adjacent to intersections. There are no pavement markings specific to this measure.

### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Emergency Services:** Consideration of larger vehicles along narrow roads.
- **Active Transportation:**
  - Parked vehicles provide a buffer between vehicular traffic and pedestrians on sidewalks
  - On-street parking may reduce mutual visibility for pedestrians crossing the roadway
  - Implementation and alignment of on-street parking areas require coordination with any on-street cycling facilities, particularly where on-street cycling facilities may transition or connect at intersections.
- **Enforcement:** Additional enforcement may be required if parking prohibitions are in place.
- **Parking:** Parked vehicles may obstruct driveways or reduce visibility for motorists entering the roadway from driveways, which could increase the potential for rear-end or sideswipe collisions.
- **Maintenance:**
  - Can create constraints and challenges for roadway maintenance operations because parked vehicles may obstruct street sweeping, catch basin cleaning, and snow removal (unless parking prohibitions are implemented for these operations)
  - Narrower roadway widths may be impacted where the right-of-way is used for snow storage.
- **Implementation Cost:** Low to Medium

<sup>35</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. Canadian Guide to Traffic Calming, Second Edition. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

### Type II (Engineered-based) Measures: Specialized Implementations


#### Chicanes

##### Description

Chicanes are curb extensions that alternate from one side of the road to the other. In general, a series of three or more curb extensions are used to force vehicles to slow down and travel in an S-shaped path through the chicane. A one-lane chicane narrows a two-lane roadway into the width of one-lane, requiring one vehicle to yield if two vehicles arrive at the same time in opposite directions. They are most effective on local roads with regular traffic in both directions to minimize opportunities for motorists to drive down the center unimpeded.

##### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban
- **ADT:**
  - Minimum 750 vehicles per day or 100 vehicles per hour during peak hour
  - For roads with bicycle routes: < 1000 vehicles per day
- **Cross-Section:** Max. 2 lane roadway (one each direction)
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:**
  - Transit routes
  - Designated emergency access routes.

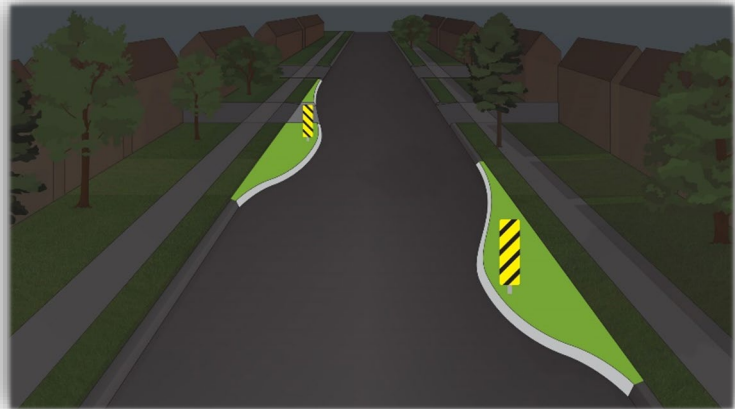

##### Potential Benefits

- **Speed Reduction:**
  - Can slow traffic by encouraging a driver to moderate vehicle speed through a series of horizontal deflections
  - Speed reduction between 5 and 15 km/h can be achieved
  - May reduce collision rates up to 40%
- **Volume Reduction:** Amount of traffic diversion is dependent on the number of measures along the roadway (can be significant)

##### Geometric Design Considerations<sup>36</sup>

A two-lane chicane requires a pavement width of at least 12.0 m and a one-lane chicane with requires a pavement width of at least 7.0 m. The size of chicane islands will vary with the street

<sup>36</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

width and the spacing of chicane segments is dependent on-site considerations (i.e. location of driveways).

For a chicane to function properly, the offset between the apexes of adjacent chicane islands must be 2.0 m or less. However, if the chicane is lengthened to provide above-minimum widths between adjacent islands, impacts on transit and emergency operations will be reduced at the expense of potentially higher overall travel speeds.

It is typical to provide a 1.0 m drainage channel to the curb face when designing chicanes, but it is preferable if drainage can be accommodated without requiring a channel and using just the gutter pan minimum width. However, this is subject to site specific design based on crossfall, grades, expected storm intensity, etc.

### Signing and Pavement Marking Design Considerations<sup>36</sup>

Each island in a chicane typically has an Object Marker (Wa-33) at its apex so that drivers are aware of their presence and can comfortably negotiate around the island without striking them. Consideration can also be given to providing bollards with reflective striping as an alternative to Object Markers in some municipalities.

Stopping Prohibited signs (Rb-55) are required for all chicanes because parking and stopping is not prohibited within the limits of a chicane.

For a two-way one-lane chicane, a Yield sign (Ra-2) and a Yield to Oncoming Traffic sign (Rb-91) are required in advance of this type of chicane to warn motorists that the roadway narrows and yielding may be required.


To help discourage motorists from cutting across the centerline of a two-lane chicane to avoid deflection, a solid yellow line may be painted to separate opposing traffic, or a raised median island could be installed.

### Other Considerations

- **Local Vehicle Access:** Traffic may be diverted to parallel streets or alternative routes without traffic calming measures
- **Emergency Services:**
  - Chicanes may have an effect on emergency service response times
  - A sufficient roadway width should be maintained to facilitate the movement of fire apparatus and other large vehicles.
- **Active Transportation:** Dedicated cycling facilities may be affected. Consideration may be given to directing cycling facilities off-road through these areas.
- **Enforcement:** Additional enforcement is not typically required, however, implementation of this type of traffic calming measure may incite sharp cornering, braking and acceleration, and other aggressive driving behaviour.
- **Parking:** Requires removal of on-street parking within the operational envelope of the chicane.
- **Maintenance:**

## Traffic Calming Guidelines

- Can create constraints and challenges for snow plowing and snow removal; may require specialized vehicles
- May require enhanced street-sweeping
- Consideration for existing drainage elements such as catch basins, concrete channels, gutters, inlets, and trench drains.
- Not anticipated to notably impact below-grade utilities, however presence of and adjustment to at grade valves and maintenance holes should be reviewed
- May require careful consideration of the alignment and presence of at-grade utilities.
- **Streetscaping:**
  - May provide an opportunity for landscaping, however opportunities may be limited depending on the scope and size of the curb extensions
- **Implementation Cost:** Medium to High

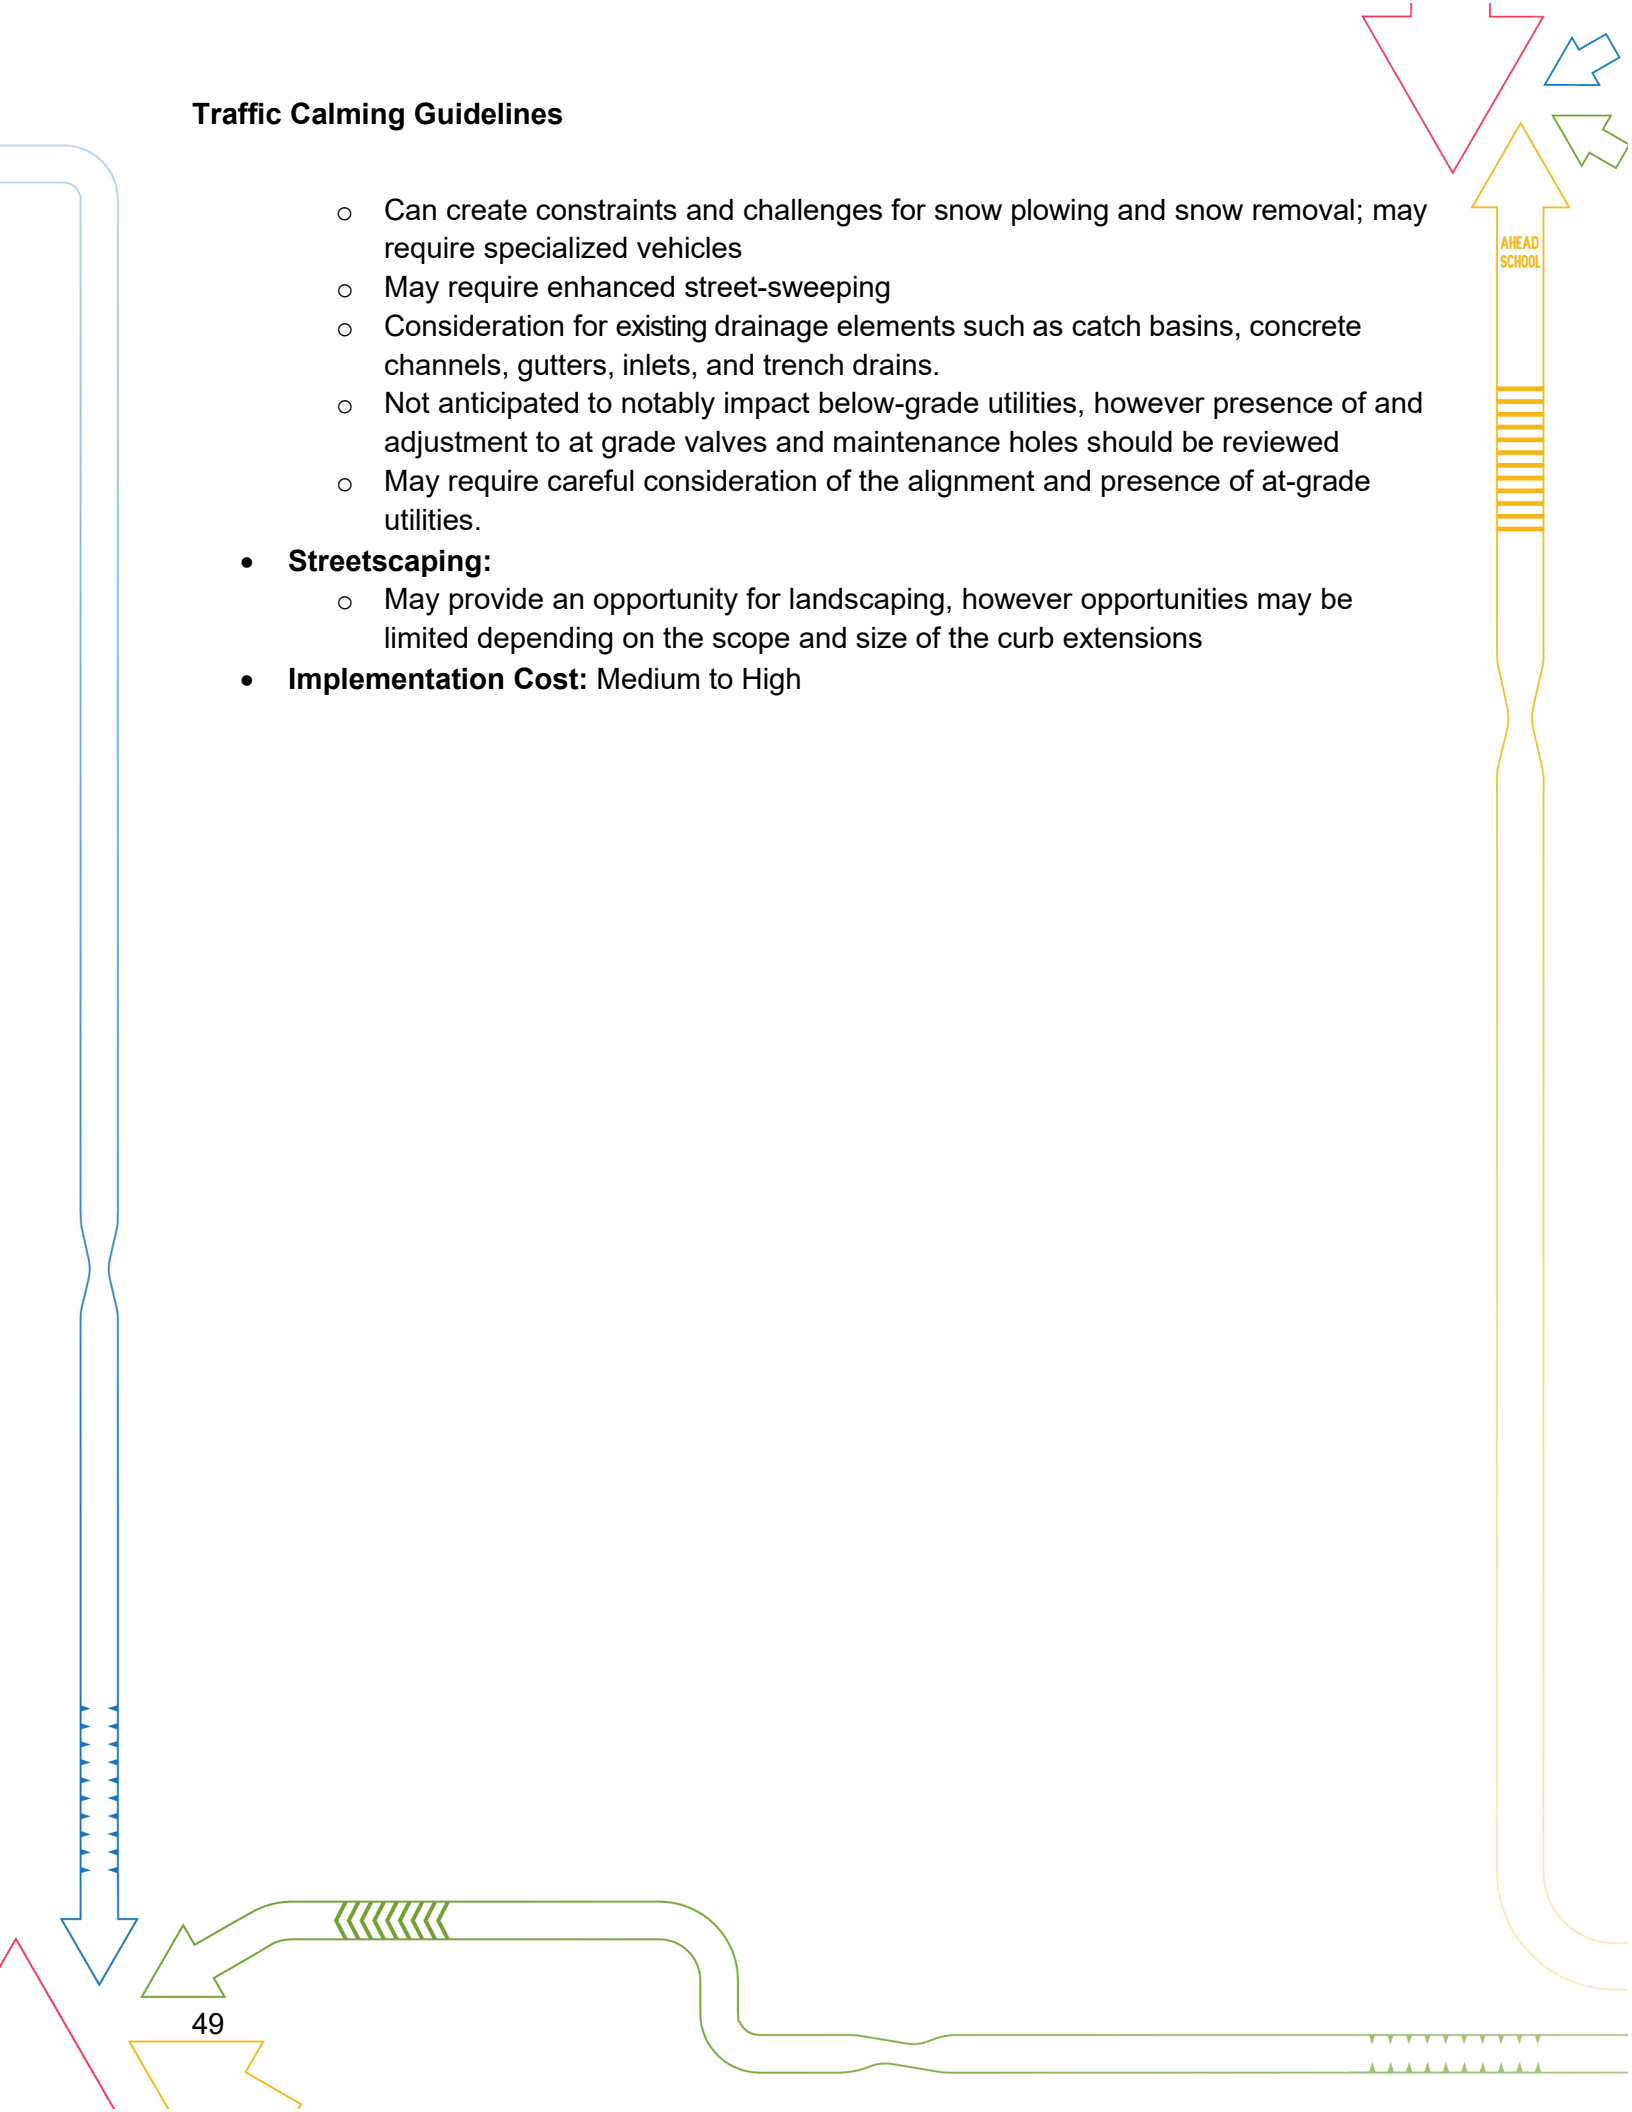

## Traffic Calming Guidelines


### Type II: Speed Kidneys

#### Description

A speed kidney is an arrangement of three speed humps elongated with a curvilinear shape in the direction of traffic flow. The main speed humps of the speed kidney are placed in the travel lane, while a complimentary speed hump is placed between the lanes. Drivers that choose to travel in a straight path will experience discomfort as two or four wheels traverse the different parts of the speed kidney. Vehicles are required to take a curvilinear path to avoid vertical deflection.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban
- **ADT:** All traffic volumes
- **Cross-Section:** Only two-lane roadways (one each direction)
- **Grade:**  $\leq 5\%$
- **Locations to Avoid:** Intersections and horizontal/vertical curves

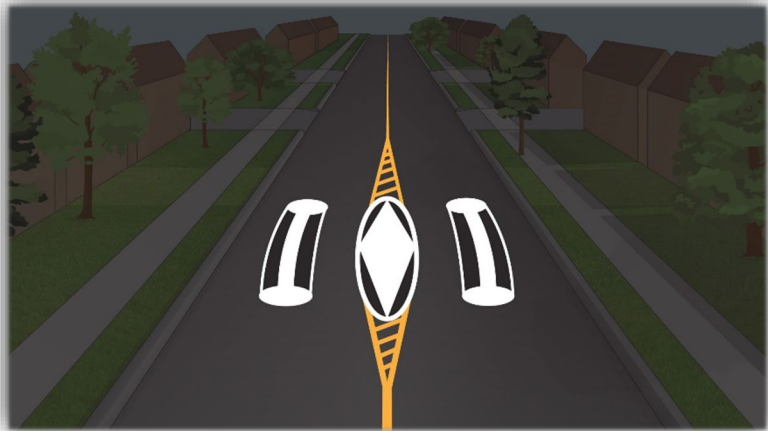

#### Potential Benefits

- **Speed Reduction:** Speed reduction of up to 5 km/h can be achieved.
- **Volume Reduction:** Amount of traffic diversion is dependent on the number of measures along the roadway

#### Geometric Design Considerations<sup>37</sup>

On roads where a speed kidney is being considered, the lane width should be a minimum of 3.7 m to ensure that trucks, emergency vehicles, and buses are able to continue on a straight path by safely straddling the main speed hump. The radius of the central curve is dependent on the radius of the speed kidney, which is determined by the operating speed. If the street is not wide enough to accommodate a pair of speed kidneys, the curb (if one is present) or the edge line should be modified to a curve line that follows the curvature of the speed kidney.

#### Signing and Pavement Marking Design Considerations<sup>37</sup>


The speed kidney should be painted white with a Speed Hump warning sign (Wa-74) installed to alert drivers of the vertical deflection. Stopping Prohibited signs (Rb-55) are required for all speed kidneys because parking and stopping on both sides of the speed kidney to ensure that motorists can safely drive along the curved path.

<sup>37</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

### Other Considerations

- **Local Vehicle Access:** Traffic may be diverted to parallel streets without traffic calming measures.
- **Emergency Services:** It may have an effect on emergency service response times.
- **Active Transportation:** Since the speed kidney directs traffic towards the curb, specific warning signage should be used wherever speed kidneys are used on a roadway with dedicated cycling facilities or where significant volumes of cyclists are present.
- **Parking:** May require removal of on-street parking on outer sides of the roadway by the speed kidney.
- **Maintenance:** Can create constraints and challenges for snow plowing and snow removal; plow operators must use caution to avoid damaging the surface of the speed kidney.
- **Implementation Cost:** Medium

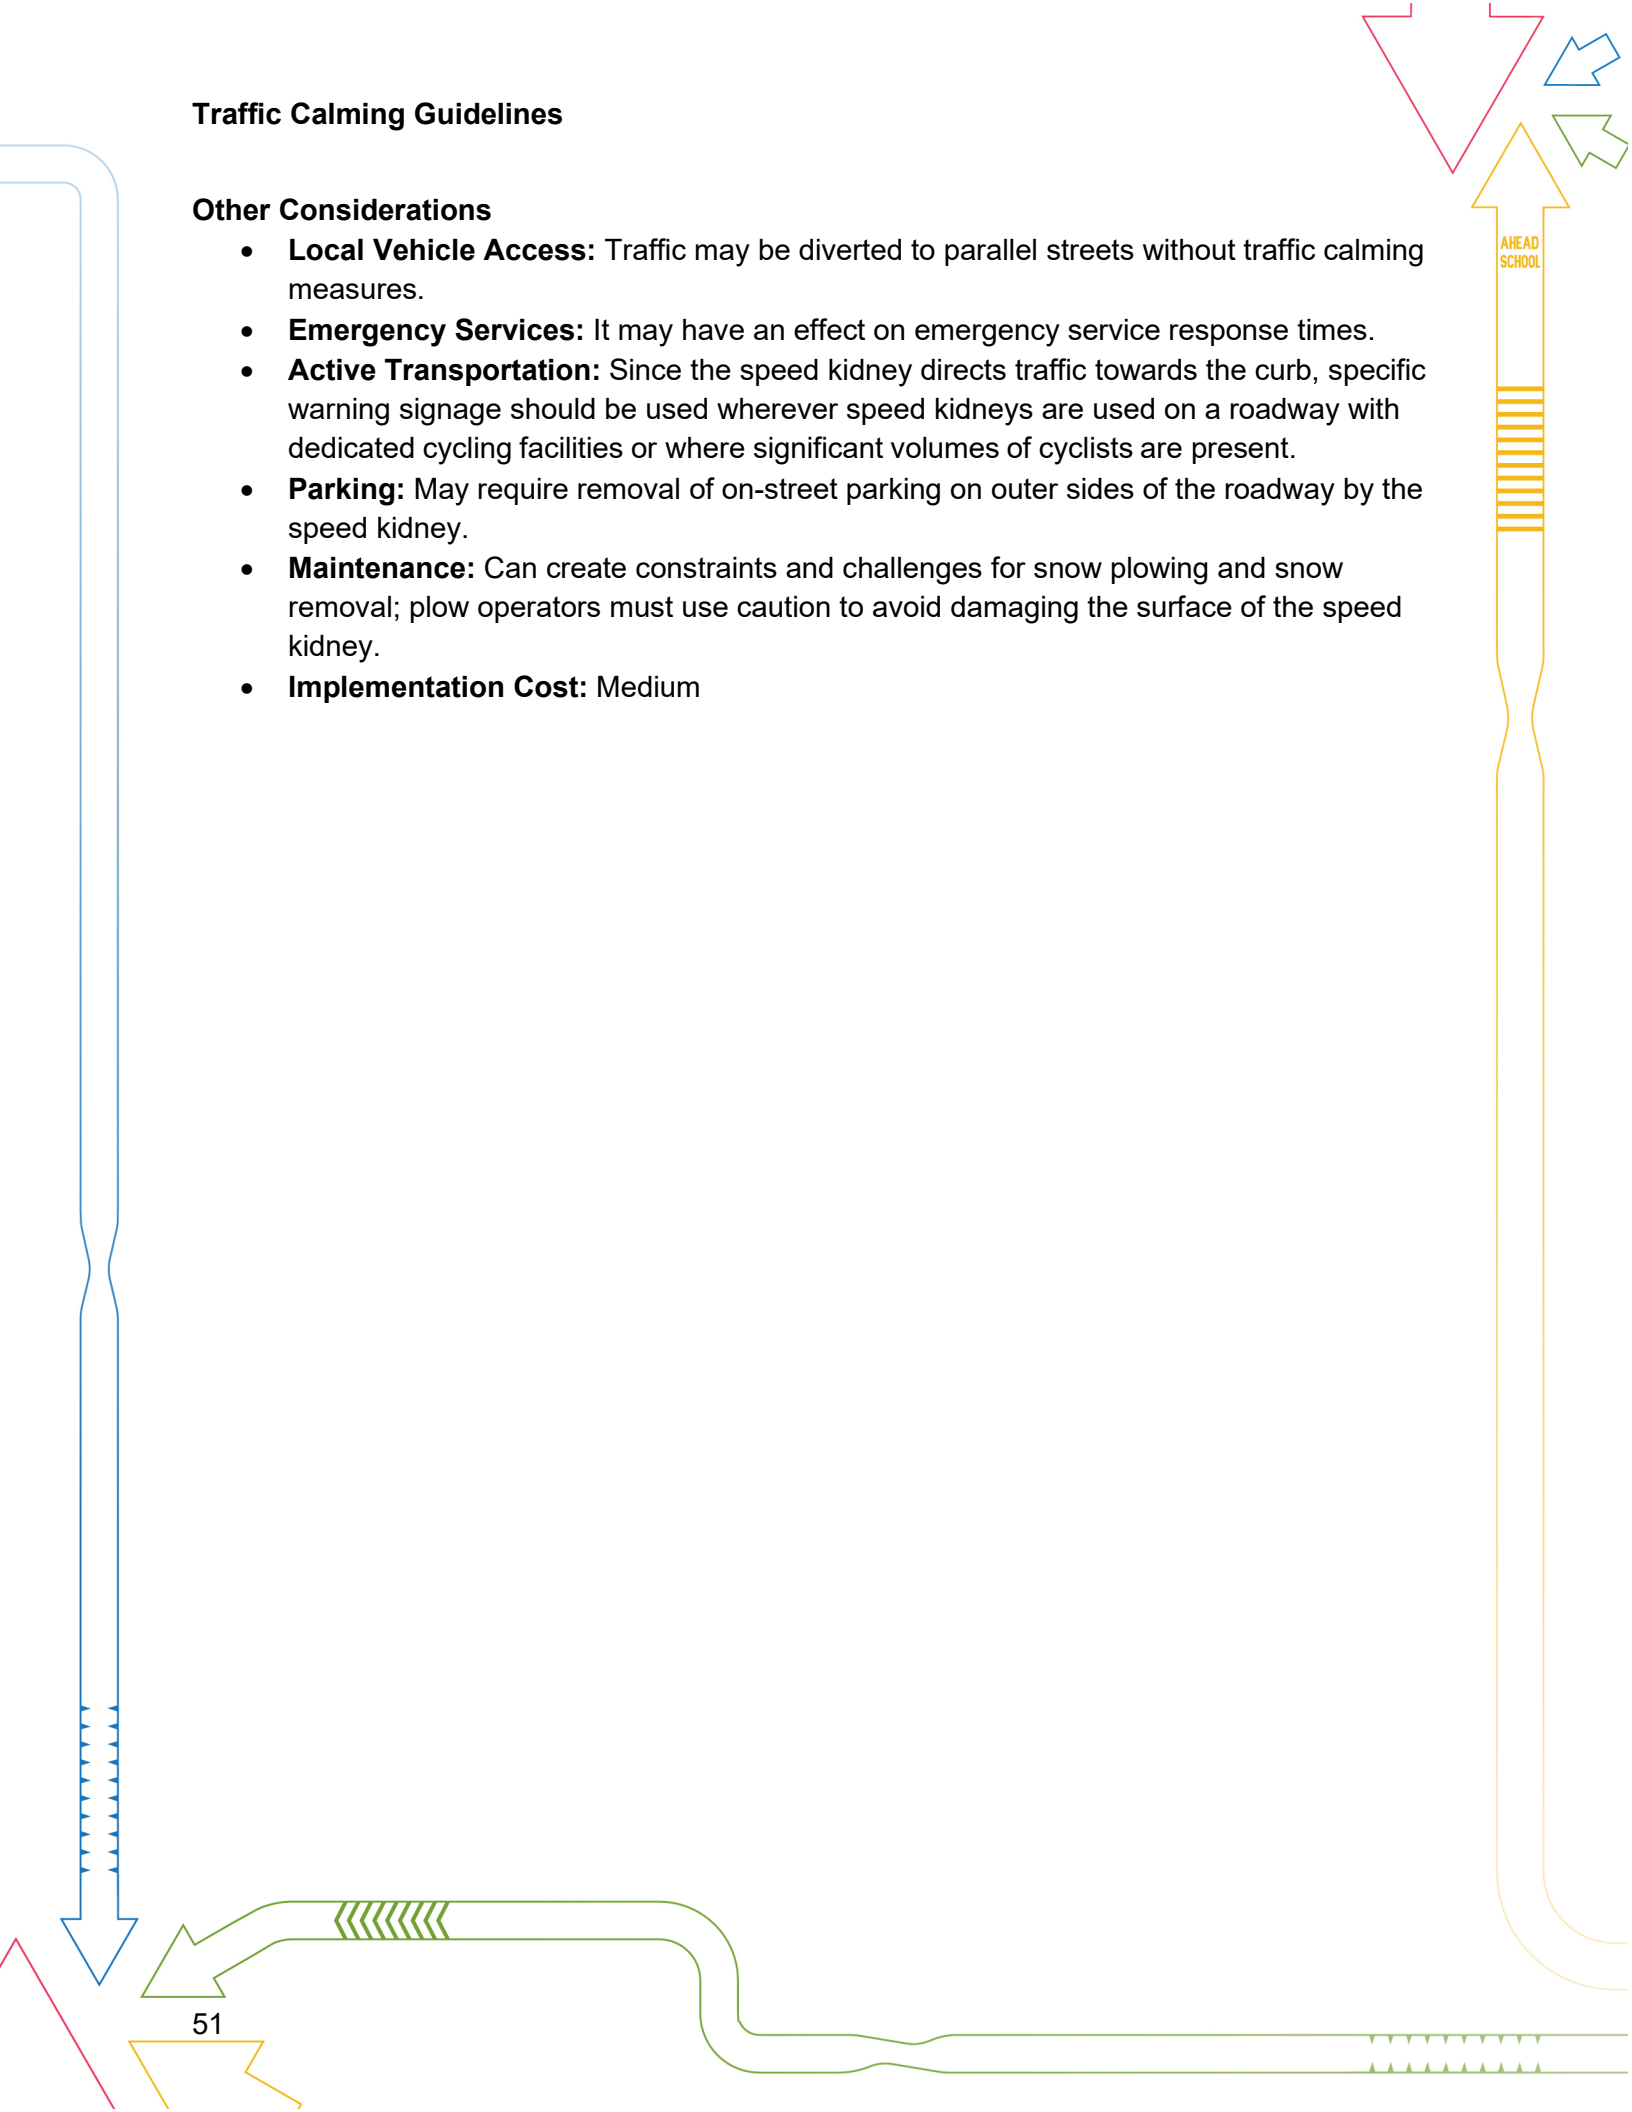

## Traffic Calming Guidelines


### Type II: Mini-Roundabouts

#### Description

Mini roundabouts are raised islands located in the centre of an intersection that motorists navigate around in a counterclockwise direction. They also include median islands on all approaches to guide vehicles into the mini roundabout and may include a truck apron on the outer island circumference to enable the passage of transit and emergency vehicles.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** < 1500 vehicles per day (use with caution for low-volume collectors with 1500 to 5000 vehicles per day)
- **Cross-Section:** Max. 2 lane roadway (one each direction)
- **Grade:** ≤ 8%
- **Locations to Avoid:**
  - Local street intersections with other local streets where this may shift traffic volume issues to other local streets instead of the arterial system (directional closure only)
  - Designated emergency routes

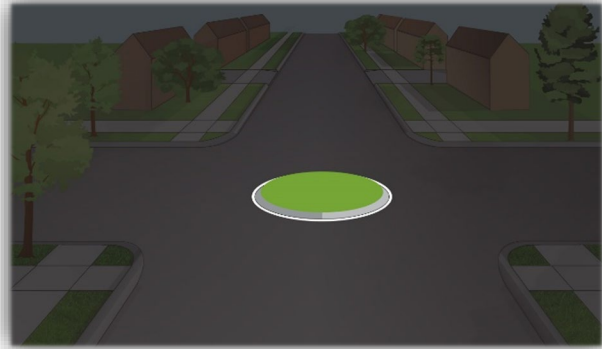

#### Potential Benefits

- **Speed Reduction:**
  - Speed reduction can be maximized when mini-roundabouts are used in series.
  - Speed reductions for through movements of up to 14 km/h can be achieved.
- **Volume Reduction:**
  - Volume reduction of up to 20% can be achieved

#### Geometric Design Considerations<sup>38</sup>

A mini-roundabout should be designed as large as possible within the intersection's constraints where the right-of-way is wide enough to accommodate at least a 13 m inscribed circle diameter (ICD) roundabout. However, the ICD of a mini-roundabout should generally not exceed 30 m. The central island should be domed using a 5% to 6% cross slope with a maximum height of 125 mm.

The splitter islands used at mini-roundabouts can either be raised, traversable, or flush (painted) depending on various site conditions.

<sup>38</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines

### Signing and Pavement Marking Design Considerations<sup>39</sup>

Yield signs (Ra-2) are recommended at all approaches. Chevron alignment signs (Wa-9) indicating a change in horizontal alignment are required.

The Manual of Uniform Traffic Control Devices for Canada provides additional details regarding mini-roundabout signing and pavement markings.

### Parking Considerations<sup>39</sup>

Parking within the circulatory roadway of a mini-roundabout is typically prohibited because it may lead to unsafe and inefficient roundabout operations. It is recommended that parking should be prohibited at least 6 m from the crosswalk of an intersection and that curb extensions or bulb-outs be used to clearly indicate the limit of permitted parking.

### Pedestrian Treatment Considerations<sup>39</sup>

Pedestrian crosswalks are recommended to be located 6 m upstream of the mini roundabout's entrance line to accommodate one passenger vehicle stopped between the crosswalk and the entrance line.

At locations where a traversable or raised splitter island is used, it is ideal for a walkway with a minimum width of 3 m to be provided that cuts through the splitter island instead of being ramped. Sidewalk ramps should be provided to connect to the sidewalks at each end of the crosswalk and a detectable warning surface should be applied to meet any accessibility requirements. If a minimum splitter island width of 1.8 m is available on an approach, a pedestrian refuge should be provided within the splitter island. However, if the available roadway width does not allow the provision of an adequate pedestrian refuge area, no detectable warnings should be used within the splitter island.

### Bicycle Considerations<sup>40</sup>

Where bicycle lanes are provided on an approach, the entire bicycle lane need to be terminated at least 30 m upstream of the entrance line to warn motorists and cyclists of the need for cyclists to merge. An appropriate taper (recommended ratio of 7:1) should be provided on the approaches with bicycle lanes to narrow the total roadway width down to an appropriate width necessary to achieve the target motor vehicle speeds on the mini-roundabout approach.

### Other Considerations

- **Local Vehicle Access:**
  - Traffic may be diverted to parallel streets without traffic calming measures.
  - Access may be restricted for longer trucks and school busses.
- **Emergency Services:** It may have an effect on emergency service response times.
- **Active Transportation:**


<sup>39</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

<sup>40</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.



## Traffic Calming Guidelines

- Mini roundabouts may force vehicles into the crosswalk area, increasing potential for pedestrian-vehicle conflicts
- Mini-roundabouts do not allow for on-road cycling facilities to be carried through (i.e. they need to be terminated and cyclists must proceed with motor vehicle traffic – single file), potential for conflicts if cyclists are curbside circulating through and motorists are trying to exit at one of the legs
- Consideration should be given to providing safe crossing locations (i.e. crosswalks) and off-road cycling facilities for pedestrians and cyclists.
- **Parking:** Requires removal of on-street parking in vicinity of mini-roundabout.
- **Maintenance:** Can create constraints and challenges for snow plowing and snow removal; may increase snow plowing time, alter pre-established snow clearing routes, or require specialized vehicles
- **Implementation Cost:** High

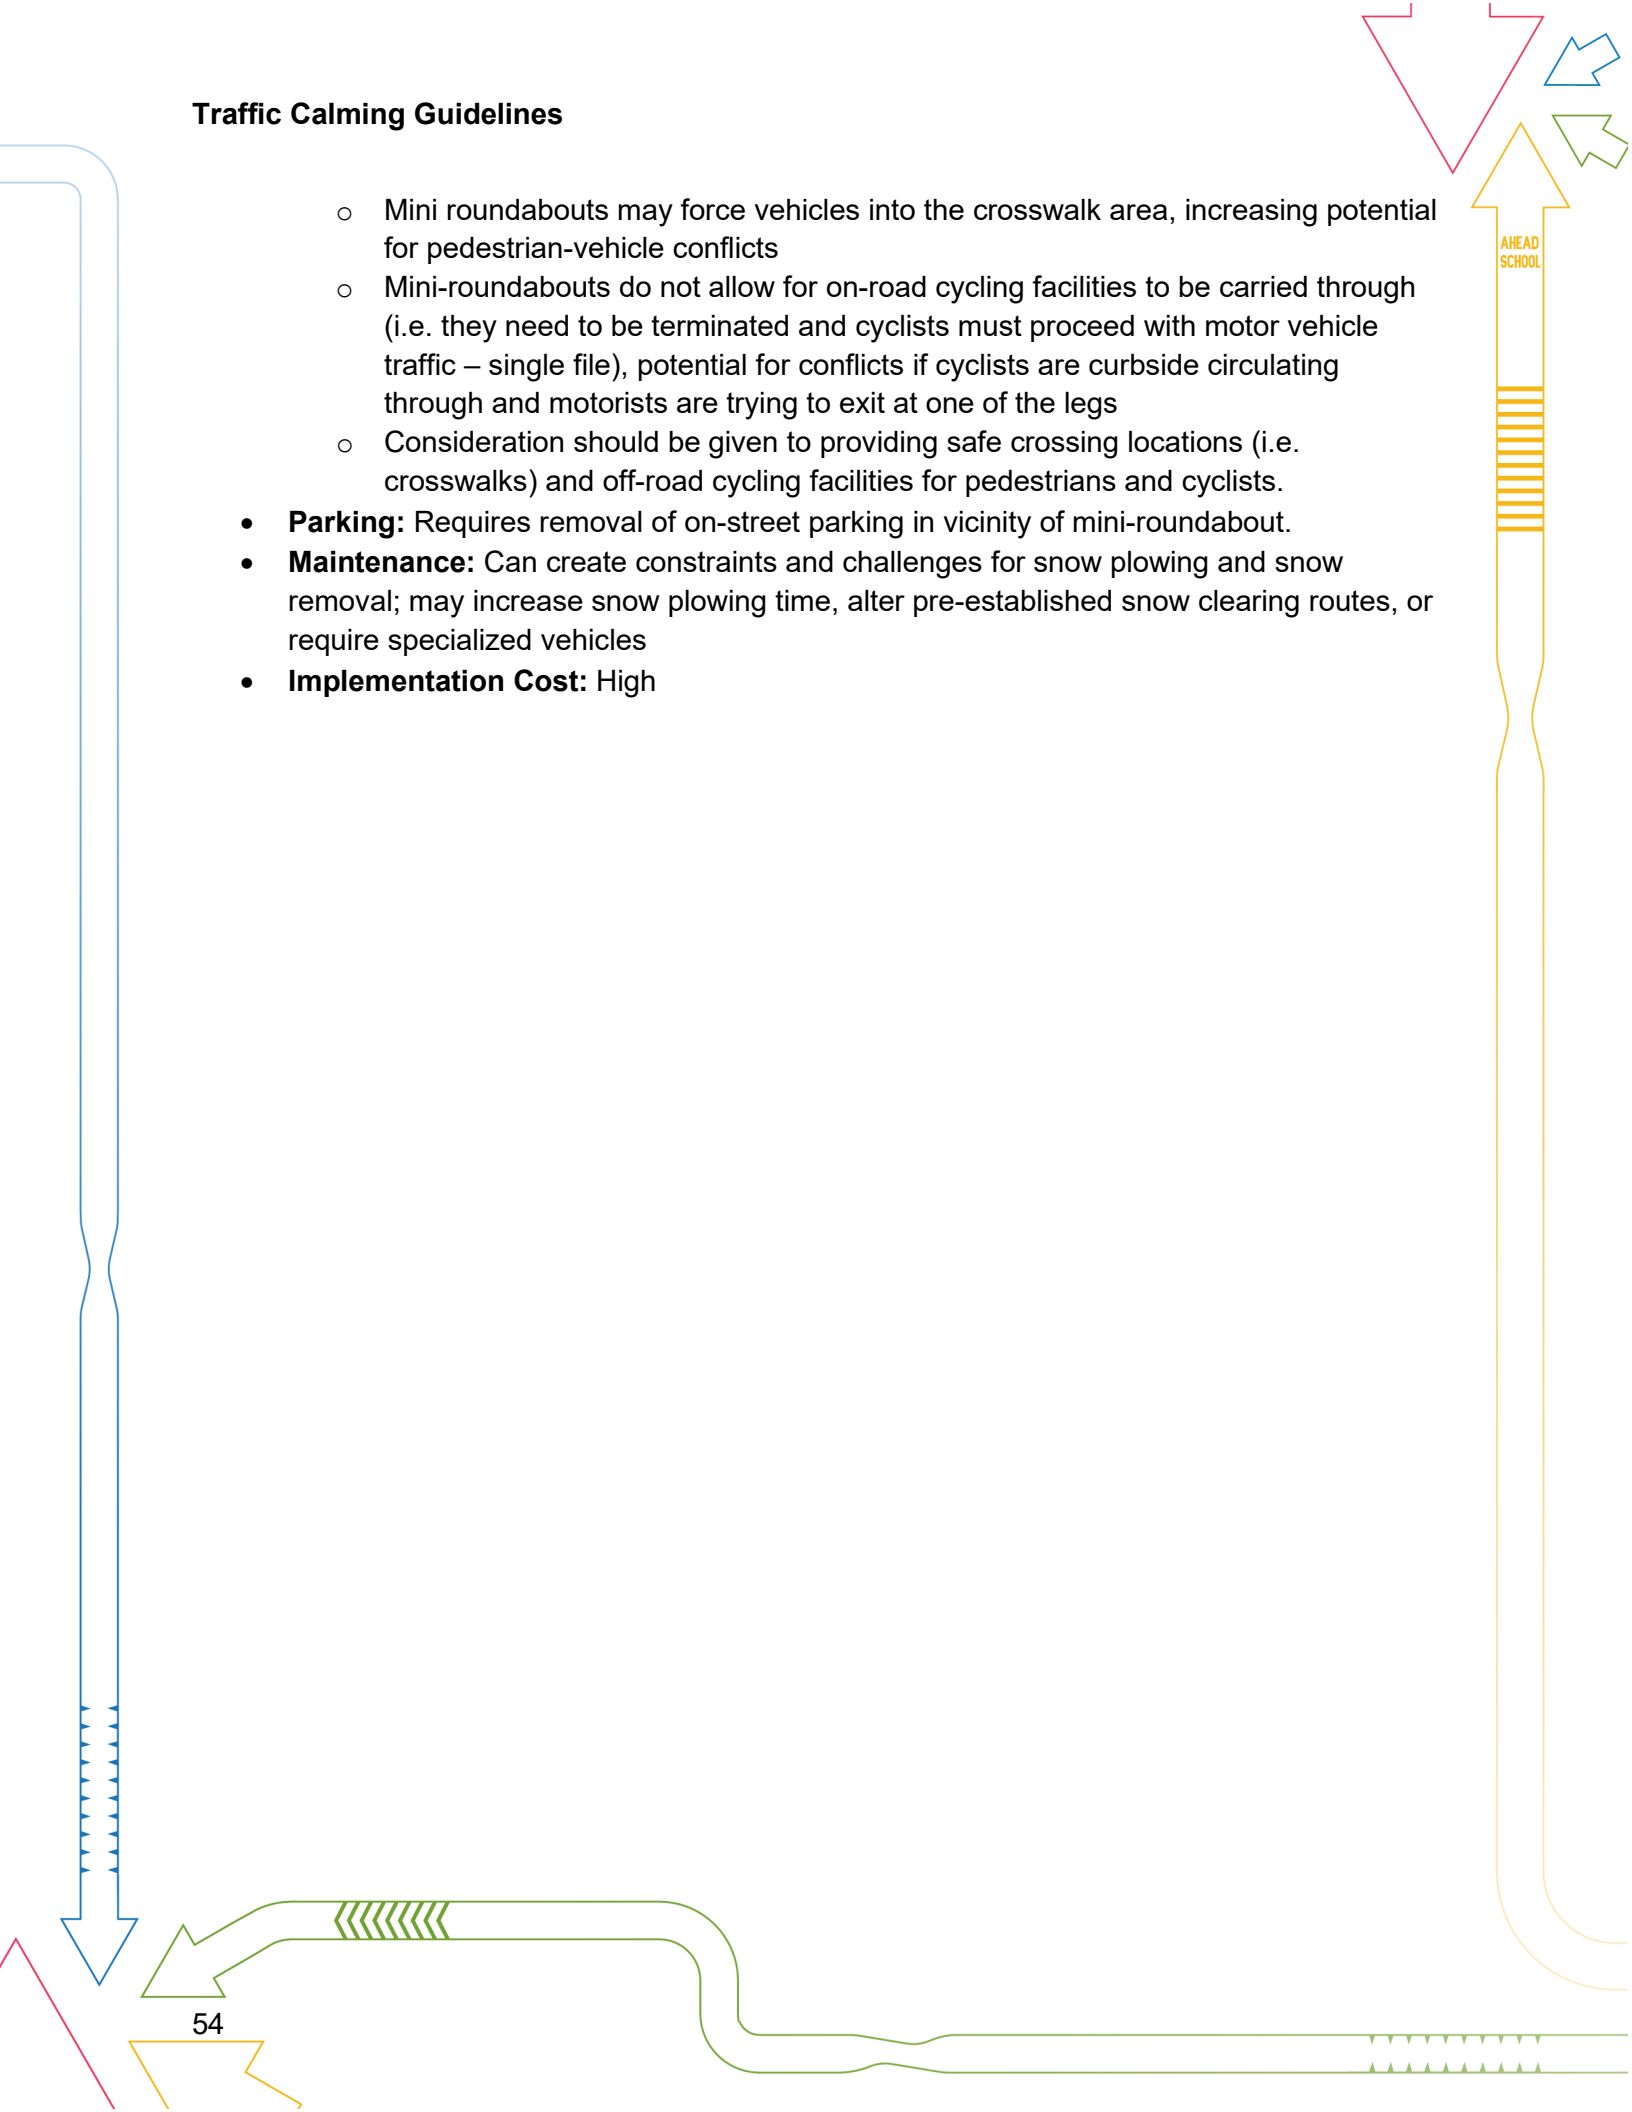

## Traffic Calming Guidelines

### Type II: Lane Reductions

#### Description


A lane reduction involves the removal of one or more travel lanes. Traffic analysis may be conducted to review projected future vehicular volumes in considering the reduced roadway capacity, and potential for vehicle re-routing depending on the adjacent transportation network linkages. The most common application is reducing four lane roadways to three lanes, with one travel lane in each direction, and a two-way centre left-turn lane. Other configurations may include reducing a four lane roadway to a three lane cross-section with the potential to introduce transit priority lanes or elements, or a reversible lane which may be used to allow traffic flow in one direction during certain times of day and in the opposite direction during other times of day, which can be useful when both directions do not require additional capacity at the same time (e.g. if there is a predominant peak flow of travel in one direction in the morning and in the opposing direction in the evening). Lane reductions also introduce opportunities for shifting more right of way width to pedestrian and cycling facilities. The implementation needs to consider the cross-section of the right-of-way and intersections and connections to other roadway facilities.

#### Applicability

- **Road Type:** Collector and Arterial Roads
- **Environment:** Urban
- **ADT:** Moderate traffic volumes
- **Cross-Section:** Most appropriate for 4-lane collector roads
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:** N/A

#### Potential Benefits

- **Speed Reduction:**
  - Speed reduction of up to 12 km/h can be achieved.
  - It may reduce the number of collisions per kilometre (collision density) and collision rate (controlled for volume) by 25% and 18%, respectively.
- **Volume Reduction:**
  - Traffic may be diverted to parallel streets without traffic calming measures.

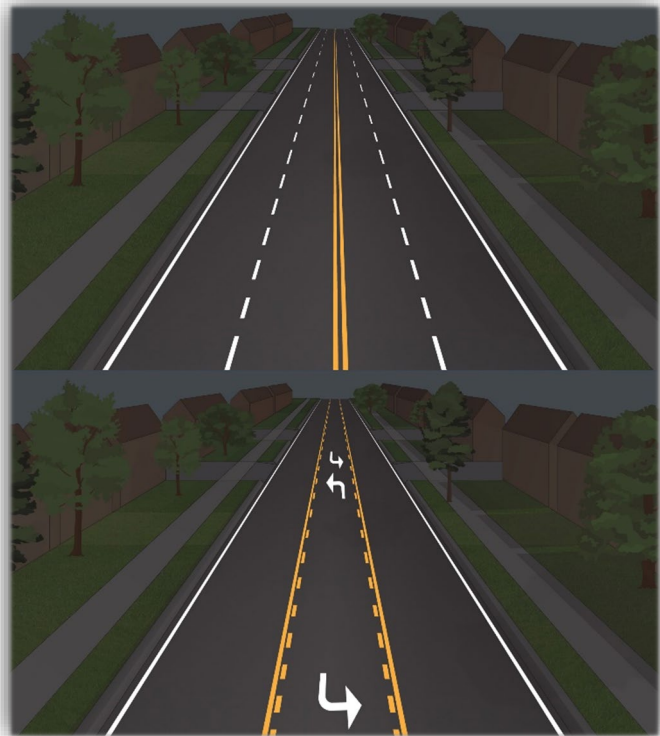

## Traffic Calming Guidelines

### Design Considerations<sup>41</sup>

Intersection turn lanes and geometric alignment, traffic volumes, signing, pavement markings, transit routes and stops, numbers and proximity of driveways and access points, and pedestrian and cycling facilities all need to be carefully considered and managed in the planning and implementation process to create the optimal lane reduction. Typically, implementation requires full reconstruction of the right-of-way.

Full details and design specifications for lane reductions can be found in the [Federal Highway Administration Road Diet Informational Guide](#).

### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Emergency Services:** It may have an effect on emergency service response times; however, emergency vehicles can bypass congestion if there is space for vehicles to pull over the side of the road.
- **Active Transportation:**
  - Can improve pedestrian crossing ease and safety.
  - Can improve bicycle accessibility if travel lanes are converted to shoulders/bike facilities instead.
  - Effective for widening sidewalks, adding bicycle lanes, and creating more attractive streets for pedestrians and cyclists.
- Lane reductions may be considered along arterial roads in specific conditions.
- **Parking:** Addition of on-street parking can be implemented as part of a reconfigured cross-section.
- **Maintenance:** No significant impact on roadway maintenance operations.
- **Implementation Cost:** Medium

<sup>41</sup> Solomon, H., Malone, B., Garcia, J. et al. 2017. *Canadian Guide to Traffic Calming, Second Edition*. Ottawa, ON: Transportation Association of Canada.

## Traffic Calming Guidelines


### Type II: Textured Pavement

#### Description

Textured pavement is roadway pavement that incorporates a textured and/or patterned surface which contrasts other adjacent roadways in the surrounding area. The difference in texture is intended to alert drivers of the potential need to reduce speed.

#### Applicability

- **Road Type:** Local and Collector Roads
- **Environment:** Urban
- **ADT:** All traffic volumes (with consideration of busses and heavy vehicles on truck routes)
- **Cross-Section:** N/A
- **Grade:**  $\leq 8\%$
- **Locations to Avoid:** N/A

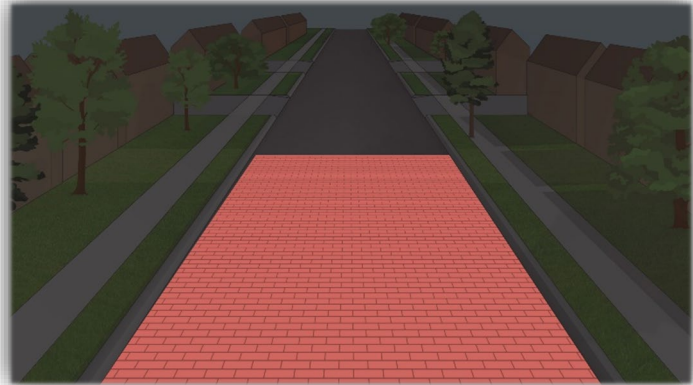

#### Potential Benefits


- **Speed Reduction:** Amount of speed reduction is dependent on the number of measures along the roadway (minimal effect if used alone).

#### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Emergency Services:** No significant impact on emergency service response times.
- **Active Transportation:** The textured surface may be difficult for cyclists and pedestrians to traverse (i.e. if brick or unit pavers are used). Consideration should be given to the texture/pronouncement of the pattern, materials, and area of implementation.
- **Parking:** Removal of on-street parking is not required.
- **Maintenance:**
  - Certain materials (e.g. brick pavers) requires regular maintenance. There are alternatives to textured surfaces such as stamping asphalt or concrete that may achieve a texture without requiring the same level of maintenance.
  - Textured surfaces may increase street sweeping time if the texturing involves deep grooves and excess dust/debris may remain in the grooves.
  - Textured surfaces can be less effective during the winter season due to snow/ice cover.
- **Streetscaping:**
  - May create extra traffic noise from vehicle wheels travelling over the textured surface (i.e. if texturing is rough or pronounced).

## Traffic Calming Guidelines

- Textured treatment can enhance the appearance of a street, especially when combined with other landscaping techniques.
- **Implementation Cost:** Medium to High

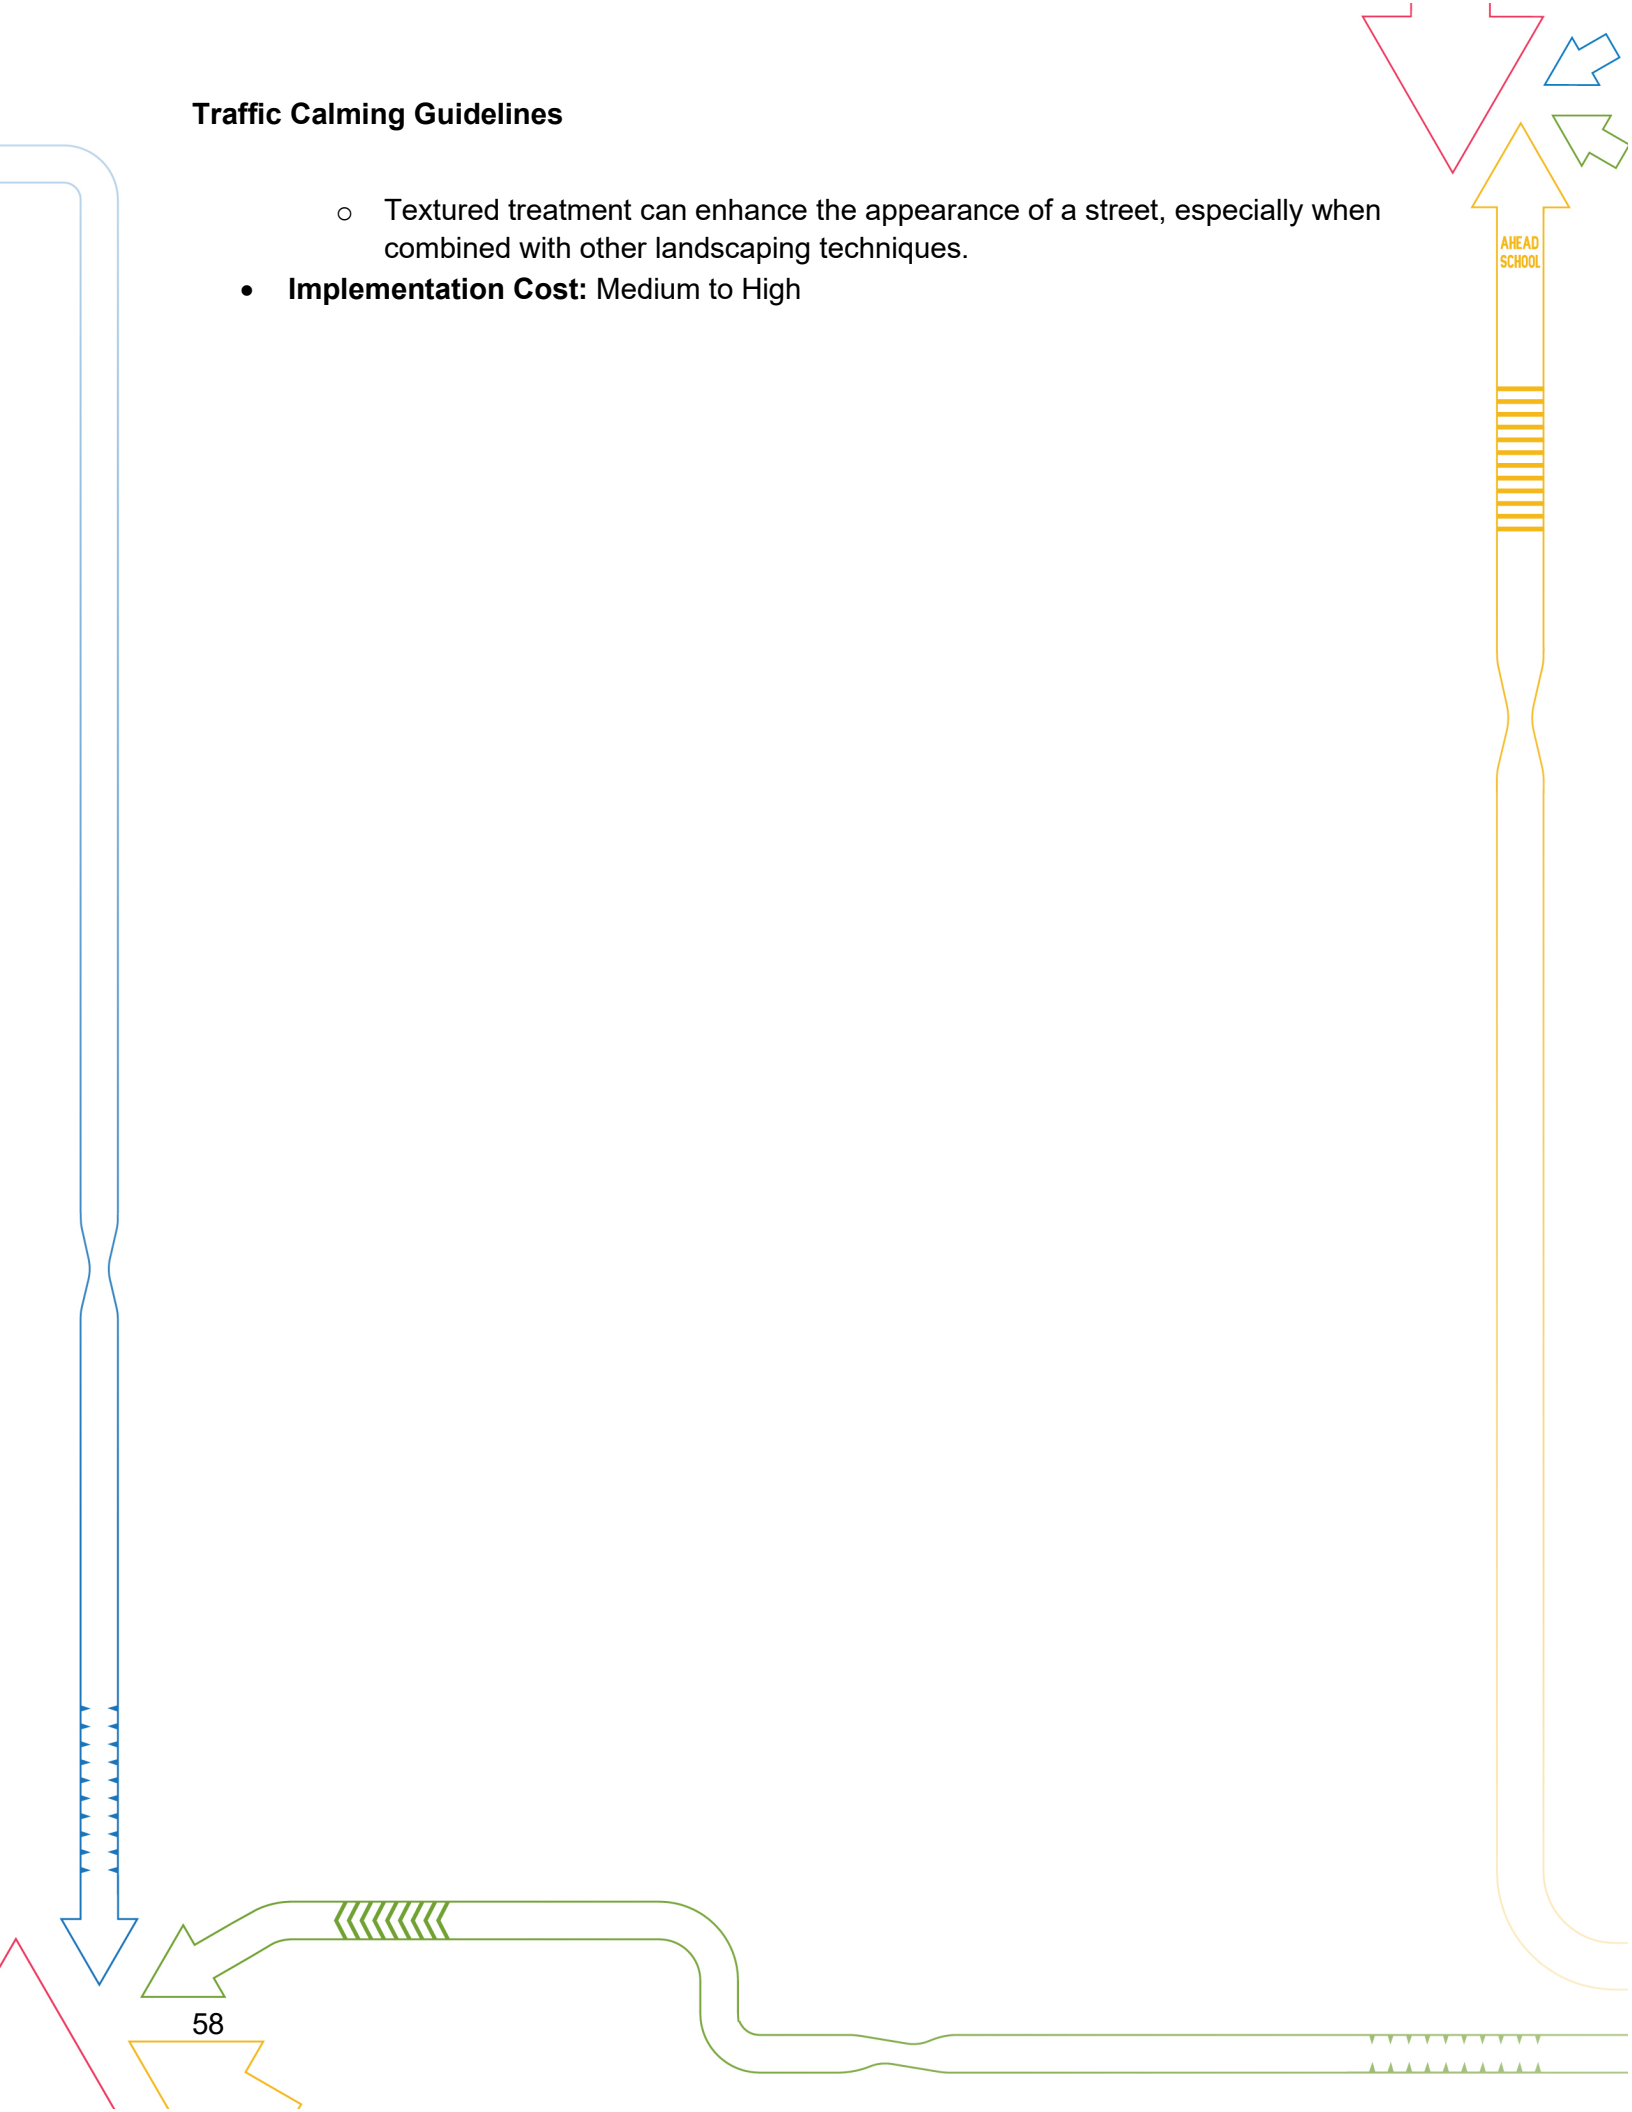

## Traffic Calming Guidelines

### Community-based Initiatives

#### Lawn Signs Encouraging Slower Driving

##### Description

This community-based measure involves the placement of signs encouraging slower driving that are placed on residential lawns. The lawn signs are intended to encourage safe driving habits and to lower operating speeds of motor vehicles on neighbourhood streets.

##### Applicability

- **Road Type:** Local Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Grade:** N/A
- **Locations to Avoid:**
  - Within 3 m of a fire hydrant
  - In a drainage ditch
  - Within 0.6 m from the curb or edge of the road
  - Any location that may obstruct the road, median, traffic island, sidewalk, bicycle path, or multi-use trail
  - On a building, structure, post, pole, tree or bush



##### Potential Benefits

- **Speed Reduction:** Limited data available on the potential degree of speed reduction – minimal demonstrated effect if used alone.

##### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Enforcement:**
  - Implementation of informational signage is not enforceable as per the Highway Traffic Act, unless used in conjunction with other types of traffic calming measures (i.e. community safety zones)
  - Overuse of this measure may reduce effectiveness
  - Avoid the overuse of custom signs to highlight conditions where standard signs (OTM or MUTCDC) are already present
- **Implementation Cost:** Low

## Traffic Calming Guidelines

### Community-based Initiatives: Pace Car Program

#### Description

The Pace Car Program is designed to promote safe roadways for all users. In Canada, the main concept of the program is to encourage drivers to sign a pledge and display a sign in their back car window that demonstrates their commitment to drive within the speed limit and show courtesy to all road users.

#### Applicability


- **Road Type:** Local and Collector Roads
- **Environment:** Urban and Rural
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Grade:** N/A
- **Locations to Avoid:** N/A

#### Potential Benefits

- **Speed Reduction:** Limited data available on the degree of speed reduction – minimal demonstrated effect if used alone.

#### Other Considerations

- **Local Vehicle Access:** Implementation of this type of traffic calming measure does not affect local traffic access.
- **Enforcement:** The Pace Car Program is not enforceable and may create tension with other motorists who are unfamiliar with the program. However, the purpose of the window decal is simply to display to other motorists that they are driving courteously and not above the speed limit, encouraging others to do the same.
- **Implementation Cost:** Low

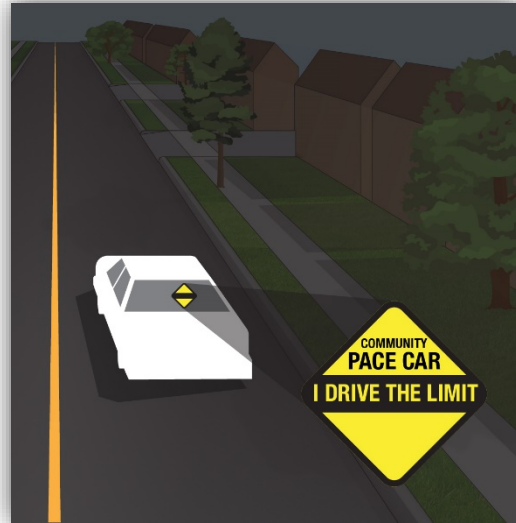

AHEAD  
SCHOOL

60

## Traffic Calming Guidelines

### Community-based Initiatives: Local-traffic Implementations

#### Description

Local-traffic implementations use heavy or anchored materials to encourage 'local traffic only' at a block-level for a pre-defined/temporary period. The degree of vehicular volume reduction of this implementation is largely dependent on the extent of compliance of motorists with the signage that suggests 'local traffic only'.

#### Applicability

- **Road Type:** Local Roads
- **Environment:** Urban
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Block Length:** 600 metres or less and two blocks or less
- **Grade:** N/A
- **Locations to Avoid:** Not recommended along Transit routes

#### Potential Benefits

- **Volume Reduction** (limited data available on the degree of volume reduction)

#### Other Considerations

- **Local Vehicle Access:** Ensure that local access in and out of homes is maintained during the temporary closure. Traffic may be diverted to parallel streets without traffic calming measures.
- **Emergency and Municipal Services:** Materials should be implemented to allow for the easy movement of essential emergency service vehicles as well as waste and road maintenance vehicles.
- **Maintenance:** Installations require inspection and maintenance to ensure that materials are placed, visible and remain effective.
- **Enforcement:** Materials should indicate to drivers that their travel path has been altered
- **Implementation Cost:** Low





## Traffic Calming Guidelines

### Community-based Initiatives: Park & Stride Program

#### Description

In partnership with interested schools, the Park & Stride program identifies suitable parking areas in a neighbourhood approximately 200-600 meters away from school entrances. This provides families who need to drive to school with an opportunity to incorporate active travel into their school commute by walking the last few minutes to school. It also improves safety by reducing the volume of vehicular traffic directly in front of schools. The associated messaging of the program highlights the benefits of active school travel, and the importance of driving safely in the neighbourhood and respecting existing parking regulations.

#### Applicability

- **Road Type:** Local Roads
- **Environment:** Urban
- **ADT:** All traffic volumes
- **Cross-Section:** N/A
- **Grade:** N/A
- **Locations to Avoid:** Avoid redirecting to parking areas that do not provide a direct connection to the school grounds (through pedestrian facilities and/or controlled crossings).

#### Potential Benefits

- **Volume Reduction:** Reduces vehicular volume in front of the school.

#### Other Considerations

- **Local Vehicle Access:** Ensure that messaging reinforces appropriate driving behaviour, such as not blocking driveway accesses.
- **Emergency Services:** N/A
- **Enforcement:** Park & Stride implementations should be done in coordination with Parking Services to ensure compliance with parking regulations.
- **Implementation Cost:** Low

